

# EXITA SERIES

## EMERGENCY LIGHTING

EXITA-5025



eralux®



The EXITA-5025 is the Metal Running Man Sign exit light from ERALUX. This exit light comes standard for mounting either on ceiling, wall or even for side installations. It also comes standard with three pictograms that be can changed in the field to offer versatility to the installation process.

DATE	
PROJECT NAME	
<b>TYPE</b>	
QTY	
ORDERING CODE	<b>BY-F5025CA</b>

### OPERATING & ELECTRICAL

INPUT VOLTAGE 120/347 Vac

POWER FACTOR 0.9

### PERFORMANCE

CCT 6500K

POWER CONSUMPTION 2.0 W

EMERGENCY POWER 2.0 W

### MECHANICAL & HOUSING

HOUSING Steel Frame

FINISH Powder Coated White

POWER SUPPLY Factory wired electronic LED driver

### APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE 0 °C to 40°C

### COMPATIBLE MOUNTING

MOUNTING Surface, Wall, Ceiling and End mounting

### WARRANTY

SYSTEM WARRANTY 2 years

RECOMMENDED BATTERY REPLACEMENT 2 years

LUMEN MAINTENANCE L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES). (L85 at 50,000 hours)

### APPROVALS

UL Certified to C22.2 #141-15


# EXITA SERIES

EMERGENCY LIGHTING

EXITA-5025

DATE	
PROJECT NAME	
<b>TYPE</b>	
QTY	
ORDERING CODE	<b>BY-F5025CA</b>

## PRODUCT DIMENSIONS

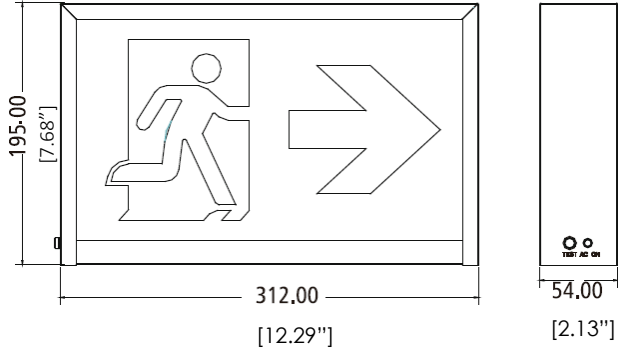

## ORDERING CODE

<b>BY-F5025CA</b>
<b>FIXTURE FAMILY</b>
<b>BY-F5025CA</b> <b>ERALUX emergency exit sign</b>



# EXITA SERIES

EMERGENCY LIGHTING

EXITA-5025

DATE	
PROJECT NAME	
<b>TYPE</b>	
QTY	
ORDERING CODE	<b>BY-F5025CA</b>

## OVERVIEW



<b>INPUT</b>	AC120-347V/60Hz
<b>INPUT POWER</b>	2 W
<b>EMERGENCY POWER</b>	2 W
<b>CCT</b>	6500K Overcharge/Over-discharge protection

<b>EMERGENCY DURATION</b>	≥1.5 Hours
<b>CHARGE TIME</b>	≤24 Hours High performance, Ni-Cad Battery Test Switch
<b>HOUSING MATERIAL</b>	Steel Frame
<b>UNIVERSAL MOUNTING</b>	Ceiling, Wall, End mount Suitable for Damp location

<b>CONFIGURATIONS</b>	Single or Double Face Comes standard with 3 pictograms
-----------------------	---



Special French Pictogram