LINEAR LED LIGHT


Architectural Linear | 2" Aperture

The Falcon series is a linear light fixture that comes in two mounting options surface or suspended. It features CCT switchable options of 30/40//50K, or 30/35/40K, and is available in finishes of Black and White. With lengths of 2, 4, and 8 feet, it meets various design needs while delivering up to 130 LPW. Additionally, this luminaire operates at a versatile voltage range of 120-347V.

Applications: Art Galleries | Office | Retail Stores | Hospitality.

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				

eralux®

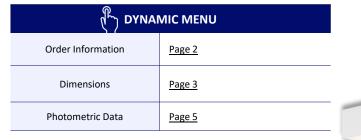

Install Instruction link

SPECIFICATIONS

Input Voltage	120-347V			
Power Factor	>0.9			
Total Harmonic Distortion	<20%			
Dimming	0-10V dimming			
CRI	80 CRI			
сст	30K 35K 40K 50K			
Efficacy	~88-108 lm/W			
Length	2'	4'	8′	
Power	18W	36W	72W	
Ambient Temperature Range	-20°C to 45°C			
Mounting Options	Surface Suspended			
Fixture Finish	Black White			
Optics	Polycarbonate Lens			
Distribution	110*			

PRODUCT FEATURES



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY - 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE - L75B50 at 50,000 hours


Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; 50% lamp maintaining rate at 50,000 hours; per guidelines published by the Illuminating Engineering Society (IES).

CAUTION

LINEAR LED LIGHT

Architectural Linear | 2" Aperture



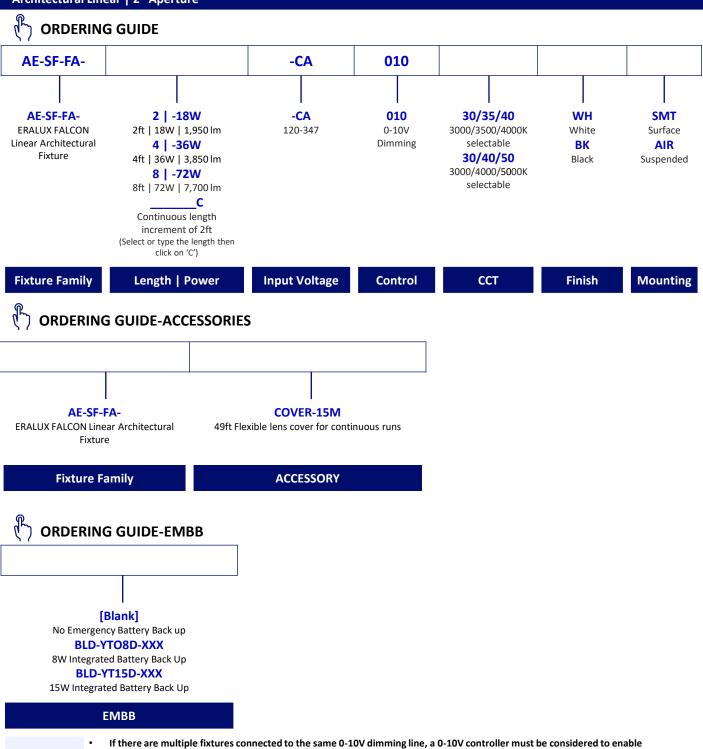


If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.


LINEAR LED LIGHT

Architectural Linear | 2" Aperture

eralux®

DIMENSIONS

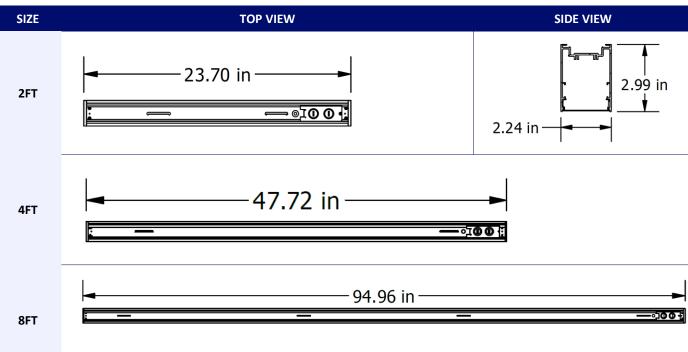

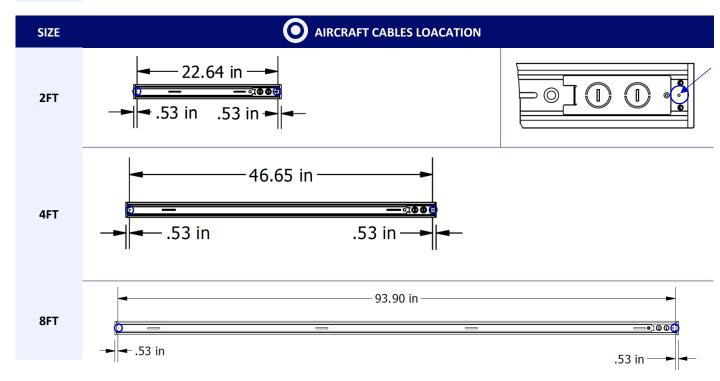

ACCESSORIES

CONTINUOS RUN ACCESSORIES						
ORDER CODE	DESCRIPTION	PICTURE				
AE-SF-FA-COVER-15M	49ft Flexible lens Used for continuous run Seamless connection					
AE-SF-FA-LINK-KIT	Link Kit used for continuous runs Seamless connection	· · · · · · · ·				


EMERGENCY LED DRIVER

BLD-YT08D-XXX



SPECIFICATIONS				
Input Voltage	30-60VDC			
Power Frequency	50/60HZ			
Output Voltage	30-60VDC			
Output Power	8W 15W			
Ambient	0°C to 50°C			
Temperature	30°F to 122°F			
Installation	Integrated			

The BLD-YTXXD-XXX series LED Emergency Driver is UL listed for field and factory installations. It switches to emergency mode during power failures, providing up to 90 minutes of lighting. With an integrated battery, charger, and converter, it delivers 8 or 15W constant power at 30-60VDC. Its slim shape is ideal for use in linear LED lighting fixtures.

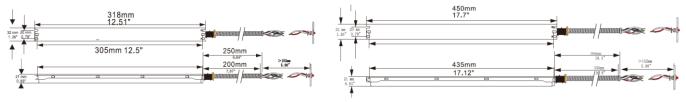

eralux®

LINEAR LED LIGHT

Architectural Linear | 2" Aperture

LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS				
ССТ	3000K	3500К	4000K	5000K
PREMIUM (90CRI)	0.94	0.97	1	1.03

PHOTOMETRIC DATA

PART NU	MBER	ZON	ZONAL LUMEN SUMMARY POLAR LUMINOUS INTENSITY		CONE DISTRIBUTION		
AE-SF-FA-2-18	3W-CA010	Zone	Lumens	% Fixture	Direct	Center Beam Fc	Beam Width
Wattage	18W	0-20°	237.24	13.5		1.7ft 226 fc	4.7 ft 4.6 ft
сст	3000K	0-30°	499.97	28.4		3.3ft 60 fc	9.2 ft 8.9 ft
Distribution	110°	0-40°	811.89	46.1		5.0ft 26.1 fc	14.0 ft 13.5 ft 18.7 ft 18.1 ft
Length	2ft	0-60°	1413.05	80.2	HEALT	6./ft 9.49.fc	23.2 ft 22.5 ft
		0-80°	4726.60	98.6		8.3ft 5.45 fc	27.9 ft 27.1 ft
			1736.69	98.6		Vert. Spread: 108.8°	
		0-90°	1761.19	100		Horiz. Spread: 107.1°	
PART NU	MBER	ZONA	LUMEN SU	JMMARY	POLAR LUMINOUS INTENSITY	CONE DISTRIE	BUTION
AE-SF-FA-4-36	W-CA010	Zone	Lumens	% Fixture	Direct	Center Beam Fc	Beam Width
Wattage	36W	0-20°	460.1	13.5		439 fc	4.7 ft 4.6 ft
сст	3000K	0-30°	969.64	28.4		1.7ft 435 fc 3.3ft 116 fc	9.2 ft 8.9 ft
Distribution	110°	0-40°	1574.59	46.1		5.0ft 50.7 fc	14.0 ft 13.5 ft
Length	4ft	0-60°	2740.48	80.2		6.7R 28.2 fc	18.7 ft 18.1 ft 23.2 ft 22.5 ft
						8.3H 12.7 fc	27.9 ft 27.1 ft
		0-80°	3368.16	98.6		Vert. Spread: 108.8°	
		0-90°	3415.67	100		Horiz. Spread: 107.1°	
PART NU	MBER	ZONA	AL LUMEN SU	JMMARY	POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION	
AE-SF-FA-8-72	2W-CA010	Zone	Lumens	% Fixture	Direct	Center Beam Fc	Beam Width
Wattage	72W	0-20°	920.21	13.5		877 fc	4.7 ft 4.6 ft
сст	3000K	0-30°	1939.28	28.4	1907	1.7ft 233 fc	9.2 ft 8.9 ft
Distribution	110°	0-40°	3149.19	46.1		5.0R 101 fc	14.0 ft 13.5 ft
Length	8ft	0-60°	5480.97	80.2		6.7R 56.5 fc 36.8 fc	18.7 ft 18.1 ft 23.2 ft 22.5 ft
	0.0					8.3ft 50.0 fc 10.0ft 25.4 fc	27.9 ft 27.1 ft
		0-80°	6736.33	98.6		Vert. Spread: 108.8°	
		0-90°	6831.34	100		Horiz. Spread: 107.1°	

LINEAR LED LIGHT Architectural Linear | 2" Aperture





ERALUX Inc. All Rights Reserved. Any information provided is subject to change without notice. All values are typical values when measured under normal laboratory conditions.