

G5/SPT PRIME SHADOW

LINEAR FIXTURES

Linear Architectural Lighting

The G5/SPT PRIME SHADOW is a high-end, black chromed reflector, low glare architectural linear, which offers a high lumen output while maintaining a UGR level below 16. The housing can be connected seamlessly to achieve longer runs. It is available for various run lengths for suspended mounting, surface mounting, and wall mounting. Our ERALUX colour finish reduces glare using a baked enamel coating that enhances and differentiates your project space.

eralux®



DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA
	010
	-
	-
	-PS

OPERATING & ELECTRICAL

INPUT VOLTAGE 120-347V

POWER FACTOR 0.9

DIMMING 0-10V

TOTAL HARMONIC DISTORTION (THD) <20%

PERFORMANCE

LUMENS PER WATT ~50 LPW at 80CRI

POWER 40, 50W
60, 80W
70, 100W

DISTRIBUTION Lambertian
Up-light and downlight, Downlight

UGR <16

MECHANICAL & HOUSING

HOUSING Extruded aluminum

LENS Polycarbonate lens
Parabolic black chromed finished
louver

FINISH Nebula White
Atomic Black
Silver RAL7044
Gun Powder RAL 7011

POWER SUPPLY Factory wired electronic LED driver

LED BOARD Discrete LED

APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE -10°C to 40°C

COMPATIBLE MOUNTING

MOUNTING Suspended
Wall

WARRANTY

SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

G5/SPT PRIME SHADOW

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA 010 - - -PS

ORDERING GUIDE

EXAMPLE: AE-SF-G5CA44030/35/40010WH-GB-PS

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES	LENS
AE-SF-G5	CA				010		-	-	
ERALUX G5 linear architectural fixture	120-347Vac input voltage	4 4 feet length	40 40 watts: 2000 lumens	30/35/40 3000/3500/4000K selectable CCT	010 0-10V dimming with dim-to-off	WH-GB ERALUX Nebula White	[LEAVE BLANK] 0-10V Standard	-PU Power cord – 120-277V	-PS Parabolic black lens
		6 6 feet length	50 50 watts: 2800 lumens			BK-GB ERALUX Atomic Black		-PU-C Power cord – 120-277V with 5-inch Canopy	
						SV-GB Silver		-PH Power cord – 120-347V	
		8 8 feet length	70 70 watts: 4000 lumens			GN-GB Gun powder finish RAL 7011	-1DIM 1% Dimming	-PH-C Power cord – 120-347V with 5-inch Canopy	

CAUTION: If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.

Each fixture comes standard with 2x 6FT suspension cables

* Default CCT setting is 3500K but can be changed upon request before shipping.

*** EMBB option available in 120-277V only.

**** 1DIM **available only in 120-277V, it works for 4,5,6,8 FT**

Maximum of 300 Wattages powered by 1 electrical drop

G5/SPT PRIME SHADOW

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA 010 - - -PS

ORDERING GUIDE

EXAMPLE: AE-SF-SPTCA45030/35/40010WH-GB-PS

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES	LENS
AE-SF-SPT	CA				010		-	-	
ERALUX SPT linear architectural fixture	120-277/347 Vac input voltage	4 4 feet length	50 50 watts: 2500 lumens	30/35/40 3000/3500/4000K selectable CCT	010 0-10V dimming with dim-to-off	WH-GB ERALUX Nebula White	[LEAVE BLANK] 0-10V Standard	-PU Power cord – 120-277V	-PS Parabolic black lens
		6 6 feet length	80 80 watts: 3600 lumens			BK-GB ERALUX Atomic Black		-PU-C Power cord – 120-277V with 5-inch Canopy	
						SV-GB Silver		-PH Power cord – 120-347V	
		8 8 feet length	100 100 watts: 5000 lumens			GN-GB Gun powder finish RAL 7011	-1DIM 1% Dimming	-PH-C Power cord – 120-347V with 5-inch Canopy	

CAUTION: If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.

Each fixture comes standard with 2x 6FT suspension cables

* Default CCT setting is 3500K but can be changed upon request before shipping.

*** EMBB option available in 120-277V only.

**** 1DIM **available only in 120-277V, it works for 4,5,6,8 FT**

Maximum of 300 Wattages powered by 1 electrical drop

G5/SPT PRIME SHADOW

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA 010 - - -PS

ORDERING GUIDE...Continued




EXAMPLE: AE-SF-G5CA44030/35/40010WH-GB-PS-PU-C

ACCESSORIES	
BLANK	
-PU	- Power cord – 120-277V
-PU-C	- Power cord – 120-277V with 5-inch Canopy
-PH	- Power cord – 120-347V
-PH-C	- Power cord – 120-347V with 5-inch Canopy

POWER SWITCHABLE OPTIONS

2FT	Avg 105-120 LPW	20 watts	20W– 1260 lms
		20/30/40 watts switchable	20W – 1260 lms
30W - 1890 lms			
40W - 2520 lms			
30/40/50 watts switchable		30W - 2160 lms	
		40W - 2880 lms	
		50W - 3600 lms	
6FT		40/70 watts switchable	40W - 2880 lms
		70W - 5040 lms	
8FT			

PRODUCT DIMENSIONS - SUSPENDED

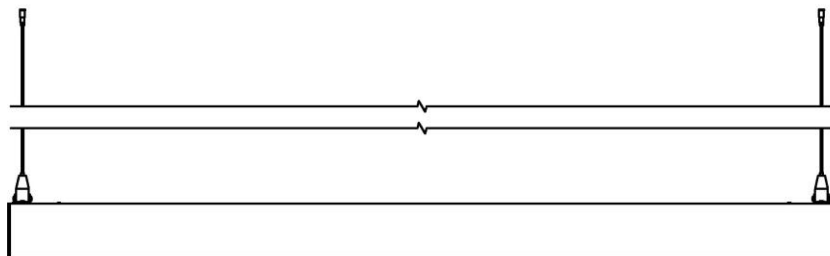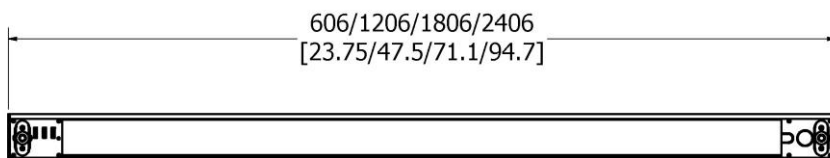

G5/SPT PRIME SHADOW


LINEAR FIXTURES

Linear Architectural Lighting


DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA AE-SF-SPTCA
	010 - - -PS

PRODUCT DIMENSION – WALL MOUNT


AE-SF-G5CA440 / AE-SF-SPTCA450

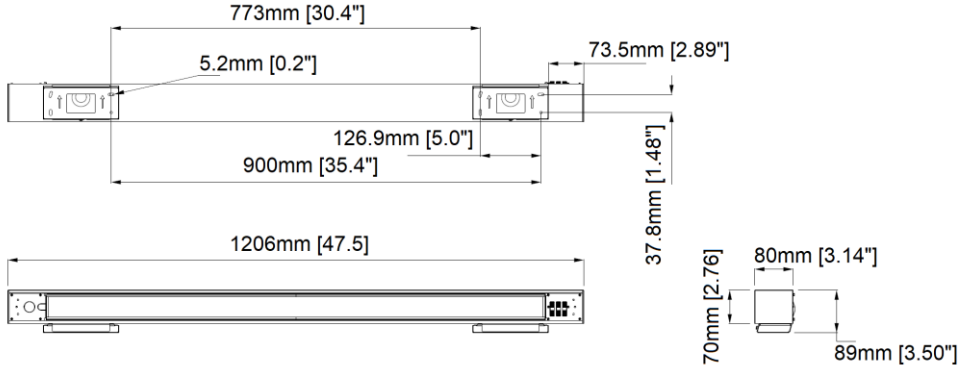

AE-SF-G5CA650 / AE-SF-SPTCA680

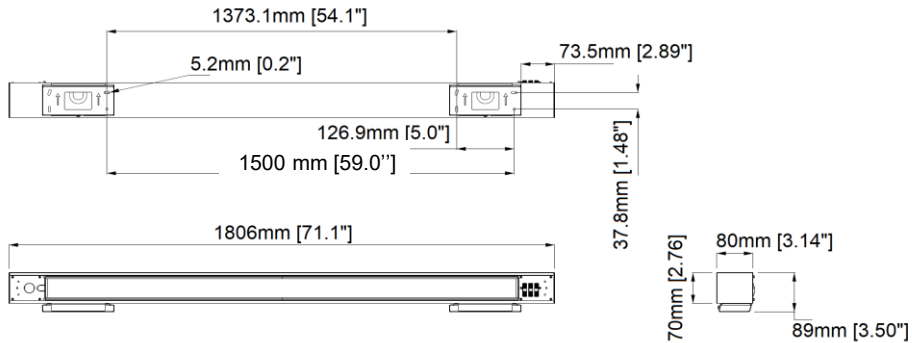

AE-SF-G5CA870 / AE-SF-SPTCA8100

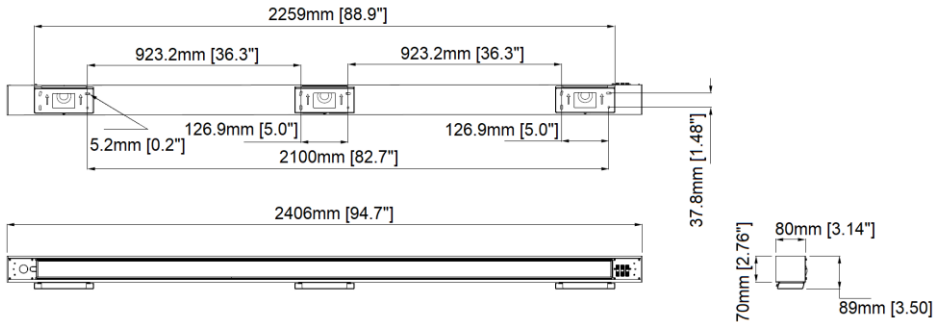

G5/SPT PRIME SHADOW

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA 010 - - -PS

LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS				
CCT	3000K	3500K	4000K	5000K
NORMAL (80CRI)	0.94	0.97	1	1.03

PHOTOMETRIC DATA

AE-SF-
G5CA44030/35/40010XX-
GB-PS (3500K)
.4 FEET
.40 WATT
.2160 LUMENS
.BLACK PARABOLIC LENS

ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY GRAPH
ZONE	LUMENS	% OF FIXTURE	
0-20°	523.96	23.40	
0-30°	1069.19	47.80	
0-40°	1601.34	71.60	
0-60°	2178.89	97.40	
0-80°	2230.17	99.70	
0-90°	2231.01	99.80	

DIMMER COMPATIBILITY LIST

0-10V Dimmer
LEGRAND RH4FBL3PTC
LUTRON DVS7V-WH
LEVITON IP710-LFZ

0-10V Dimmer
EATON WBSD-010SLD
LEVITON DS710
LUTRON MS-Z101
HUBBEL LHDIRS3N

G5/SPT PRIME SHADOW

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA
	010
	-
	-PS

OVERVIEW



2/4/6/8 ft

Single
Fixture



Seamless
joints



COLOR SELECTABLE

Easily removable fixture top exposes the DIP switch to change between 3 CCT variations from 3000 to 3500 to 4000K.

ACCESSORIES

Multiple accessories to select such as canopy cover kits and mounting brackets.

STANDARD FEATURES

6 FT suspension cables standard with fixture providing simple purchase and cost-savings.

CONTINUOUS RUNS

Easily connect multiple fixtures together for continuous mounting configuration.

FINISHES

Standard ERALUX anti-glare White and black finishes reduce object glare and provide an elegant look to the fixture's housing. In addition to silver and gun powder finishes.



Canopy: 2/kit

