

ALPS E2

Commercial LED Lighting

Back-Lit Panel | 1x4, 2x2

The ALPS E2 series is a backlit flat panel that offers uniform lighting. With switchable CCT and switchable power options, it provides unmatched flexibility for any installation. Delivering an impressive 125 LPW, the ALPS is the ideal energy-efficient upgrade for existing recessed commercial ceiling applications. Applications: Commercial Office Spaces | Healthcare | Schools | Retail Merchandising Areas.



	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				





DYNAMIC MENU

Ordering Guide	Page 2
Dimensions	Page 3
Control	Page 5
Photometric Data	Page 6

[Install Instructions](#)

SPECIFICATIONS

Input Voltage	120-277V 120-277/347V	
Power Factor	>0.9	
Total Harmonic Distortion	<20%	
Dimming	0-10V Dimming	
CRI	80 CRI	
CCT	<div style="display: flex; gap: 10px;"> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #fff9c4; display: flex; align-items: center; justify-content: center;">30K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #e0e0e0; display: flex; align-items: center; justify-content: center;">35K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #e0e0e0; display: flex; align-items: center; justify-content: center;">40K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #e0e0e0; display: flex; align-items: center; justify-content: center;">50K</div> </div>	
Efficacy	~125LPW	
Power	1x4	25/30/35W
	2X2	25/30/35W
Ambient Temperature Range	-20°C to 45°C	
Distribution	120°	
Mounting options <small>page 4</small>	Surface Mount Suspended Recessed- Gypsum Recessed -T grid	



PRODUCT FEATURES



PRODUCT CERTIFICATIONS



Design Lights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified" [page 7](#)

SYSTEM WARRANTY – 5 YEARS


Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 50,000 hours


Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).




ORDERING GUIDE

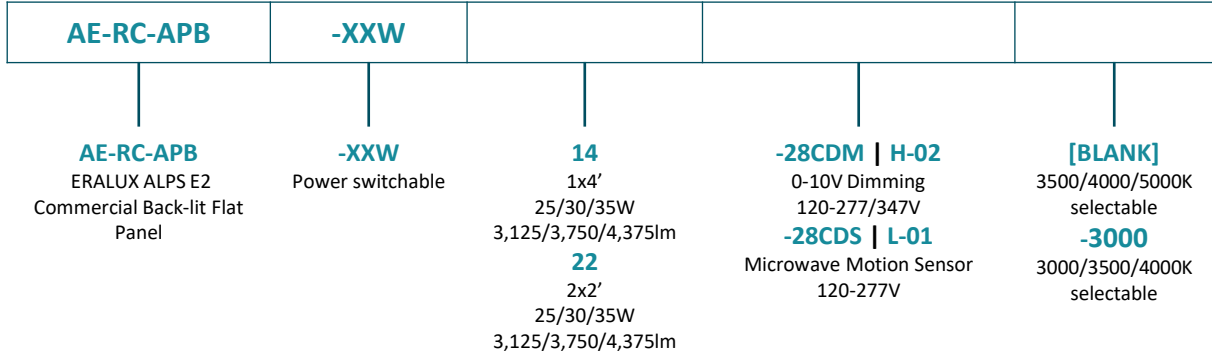

ORDERING GUIDE - ACCESSORIES

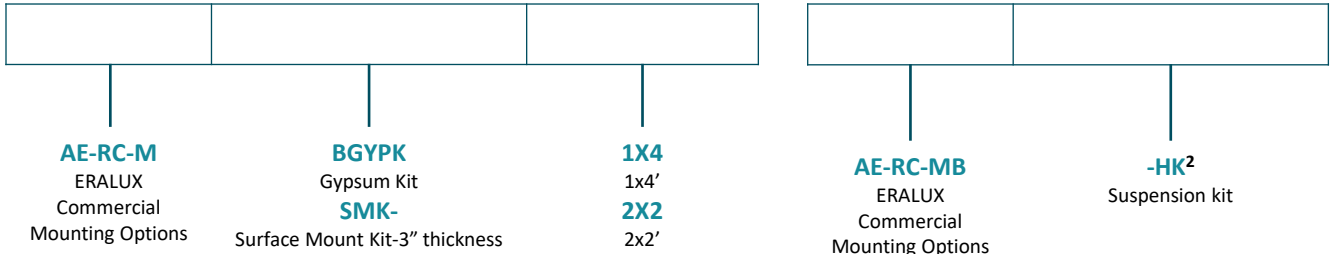


NOTES 2. For more aesthetic look suspension and surface mount kit can be ordered together

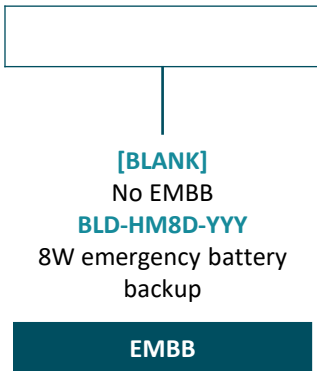


DIMENSIONS

AE-RC-APB-XXW14

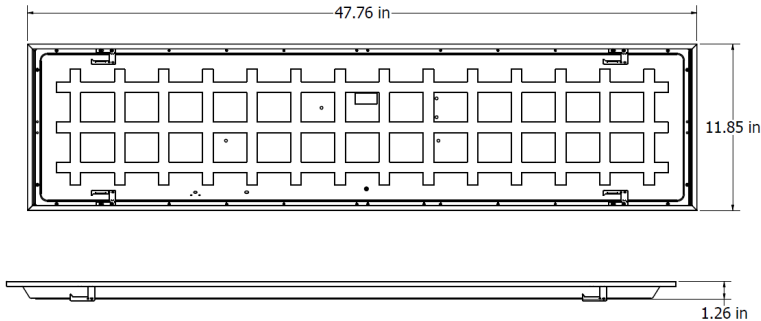

AE-RC-APB-XXW22

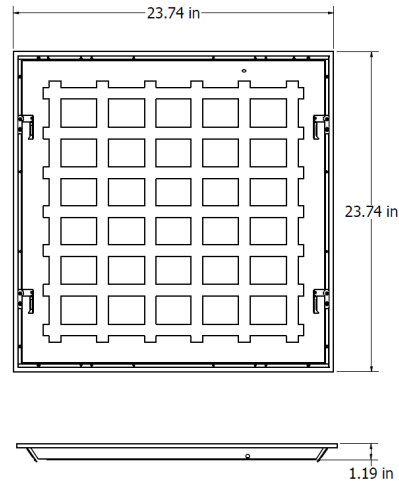

MOUNTING ACCESSORIES

Ordered separately, field installed

GYPSUM KIT


Recessed Gypsum



ORDERING CODE	DIMENSIONS			CUT OUT	
	LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH
AE-RC-MBGYPK1X4	49.1"	13.3"	1.5"	48.3" - 48.7"	12.5" - 12.9"
AE-RC-MBGYPK2X2	25.1"	25.1"	1.5"	24.3" - 24.7"	24.3" - 24.7"

SURFACE MOUNT KIT

ORDERING CODE	DIMENSIONS		
	LENGTH	WIDTH	HEIGHT
AE-RC-MSMK-1X4	48"	12.2"	2.91"
AE-RC-MBGYPK2X2	24"	24"	2.91"

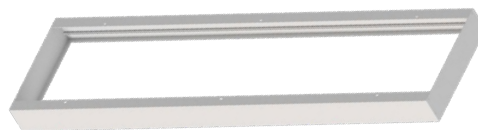

SUSEPENSION KIT



ORDERING CODE	QUANTITY	DESCRIPTION	LENGTH
AE-RC-MB-HK	3 pieces/set	Aircraft cable	4'

CONTROL ACCESSORIES


Ordered separately, field installed

EMERGENCY BATTERY BACK UP

BLD-HM8D-YYY



The BLD-HMXXD-YYY series LED Emergency Driver is UL listed for field and factory installations. It switches to emergency mode during power failures, providing up to 90 minutes of lighting. With an integrated battery, charger, and converter, it delivers 8W constant power at 170VDC. Ideal for 0-10V dimmable indoor commercial LED fixtures, such as flat panels, troffers, downlights, and linear strip lights.

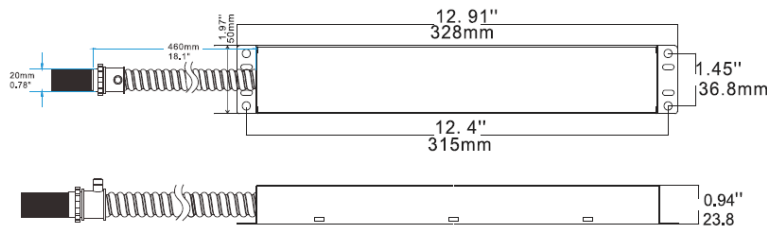


SPECIFICATIONS	
Input Voltage	100-347 Vac
Power Frequency	50/60HZ
Input Power	8W max
Output Voltage	170 VDC
Output Power	8W
Ambient Temperature	0°C to 50°C
	30°F to 122°F
Installation	Remote

ROOM OCCUPANCY SENSOR

PART NUMBER	DESCRIPTION
AE-CT-DT806	Detecta - Room Occupancy Sensor
RC102	RC102 Remote Control

SPECIFICATIONS		
Input Voltage	120-277 Vac	
Power Frequency	50/60HZ	
Rated Load	At 120 Vac	800W
	At 277 Vac	1200W
Detection Range	3-10 Meters	
	9.8- 32.8 Feet	
Standby Power	~0.9W	
Time Setting	10 sec to 30 min	
Light Control	10-2,000LUX	
Installation	Ceiling Mounted	

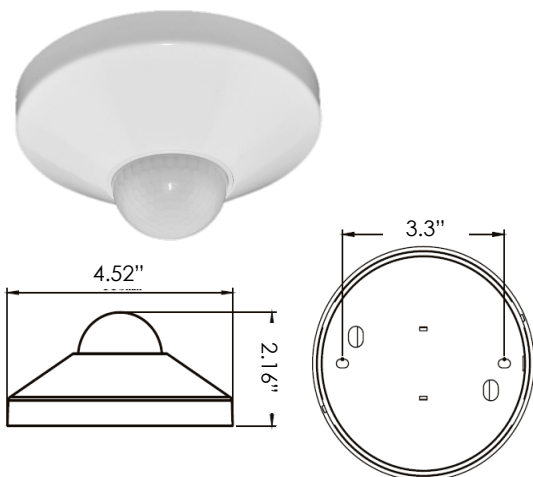

LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS

CCT	3500K	4000K	5000K
80CRI	0.97	1.00	1.03

PHOTOMETRIC DATA

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
AE-RC-APB-XXW14-28CDMH-01		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width		
Wattage	35W	0-20°	547.25	12.2		1.7ft	515 fc	5.2 ft	5.9 ft
CCT	3000K	0-30°	1168.95	26.2		3.3ft	137 fc	10.0 ft	11.4 ft
Distribution	120°	0-40°	1928.56	43.1		5.0ft	59.6 fc	15.2 ft	17.2 ft
		0-60°	3462.55	77.5		6.7ft	33.2 fc	20.4 ft	23.1 ft
		0-80°	4372.16	97.8		8.3ft	21.6 fc	25.2 ft	28.6 ft
		0-90°	4466.64	99.9		10.0ft	14.9 fc	30.4 ft	34.5 ft
						■ Vert. Spread: 113.3° ■ Horiz. Spread: 119.7°			

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
AE-RC-APB-XXW22-28CDMH-01		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width		
Wattage	40W	0-20°	655.27	12.5		1.7ft	618 fc	5.4 ft	5.3 ft
CCT	3000K	0-30°	1396.54	26.5		3.3ft	164 fc	10.5 ft	10.2 ft
Distribution	120°	0-40°	2297.7	43.7		5.0ft	71.5 fc	15.9 ft	15.4 ft
		0-60°	4101.4	78		6.7ft	39.8 fc	21.4 ft	20.7 ft
		0-80°	5156.16	98		8.3ft	25.9 fc	26.5 ft	25.6 ft
		0-90°	5257.02	99.9		10.0ft	17.9 fc	31.9 ft	30.9 ft
						■ Vert. Spread: 115.8° ■ Horiz. Spread: 114.2°			

DLC

DLC MODEL	PRODUCT ID	Primary Use	Classification
AE-RC-APB-25W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-XG2TN7	1x4 Luminaires for Ambient Lighting of Interior Commercial Space	Premium
AE-RC-APB-25W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-9T0LAY		Premium
AE-RC-APB-30W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-QGPMSO		Premium
AE-RC-APB-30W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-ML7IXT		Premium
AE-RC-APB-35W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-IWZN5H		Premium
AE-RC-APB-36W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-HWDTKJ		Premium

DLC MODELS




DLC MODEL	PRODUCT ID
AE-RC-APB-20W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-5ELXM9
AE-RC-APB-20W22-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-UFCYPQ
AE-RC-APB-25W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-XG2TN7
AE-RC-APB-25W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-9T0LAY
AE-RC-APB-25W22-28[CDM,CDS,CDE,CSE][L,H]-02	S-I06RL3
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-013000K	S-Q4XGVS
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-013500K	S-1WCFKE
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-014000K	S-BCJ30R
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-015000K	S-ZU2P1Y
AE-RC-APB-25W22-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-NA173X
AE-RC-APB-30W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-QGPMSO
AE-RC-APB-30W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-ML7IXT
AE-RC-APB-30W22-28[CDM,CDS,CDE,CSE][L,H]-02	S-UKSVL4
AE-RC-APB-30W22-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-OA21HW
AE-RC-APB-30W24-28[CDM,CDS,CDE,CSE][L,H]-02	S-TOVI16
AE-RC-APB-35W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-IWZN5H
AE-RC-APB-35W14-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-9FO1XG
AE-RC-APB-35W22-28[CDM,CDS,CDE,CSE][L,H]-02	S-CLT4PE
AE-RC-APB-35W22-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-GZBDWS
AE-RC-APB-36W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-HWDTKJ

OVERVIEW




Innovative Design

- Aluminum die-cast frame
- Enhanced quality diffuser ensures high efficiency light output for a clean, evenly illuminated surface

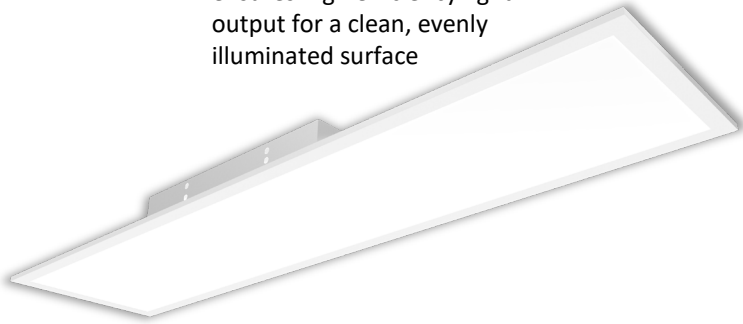



Multiple Selections

- 1x4' size
- Power Switchable.
- multiple switchable CCT options, 30 to 50K CCT

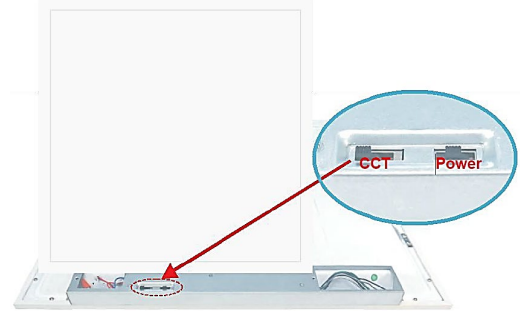

Mounting Options

- Surface Mount
- Suspended
- Recessed gypsum
- Recessed T-grid
- Suspended with surface mount kit

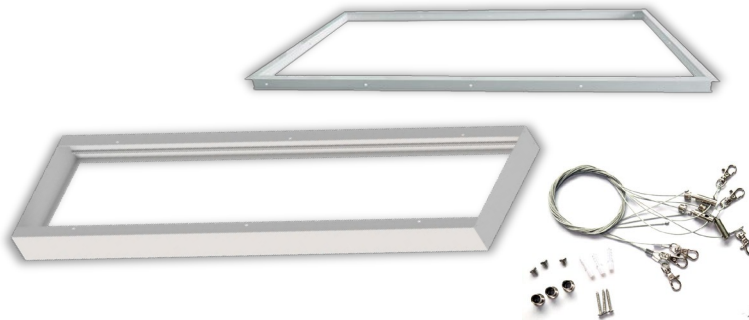

Tests And Certifications

