


ALPS EVOLVE SERIES

RECESSED COMMERCIAL LUMINAIRES

Flat Panel

The ALPS series is a backlit panel product designed with optimum LED placement to ensure a uniformly lit diffuser. It features a switchable CCT, and power package enable an endless flexibility at the install site. The average 130LPW performance also makes the ALPs an ideal replacement for any existing recessed commercial ceiling products.

eralux®

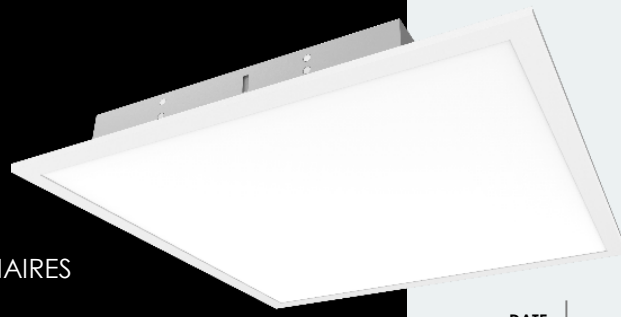

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-RC-APB-XXW -

OPERATING & ELECTRICAL

INPUT VOLTAGE	120-277V / 120-347V
POWER FACTOR	0.9
DIMMING	0-10V
TOTAL HARMONIC DISTORTION (THD)	<20%

PERFORMANCE

LUMENS PER WATT	125 LPW at 80CRI
POWER	20 to 50 W
CCT	35/40/50K
BEAM ANGLE	Lambertian

MECHANICAL & HOUSING

HOUSING	Aluminum frame
LENS	Enhanced quality diffuser ensures high efficiency light output for a clean, evenly illuminated surface
FINISH	White
POWER SUPPLY	Factory wired electronic LED driver
LED BOARD	LED array

APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE	-20 °C to 45°C
PROTECTION	Dry rated

COMPATIBLE MOUNTING

MOUNTING	DX, DXT Grid, surface mount
----------	-----------------------------

WARRANTY

SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 50,000 hours

Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

ALPS EVOLVE SERIES

RECESSED COMMERCIAL LUMINAIRES

Flat Panel

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-RC-APB-XXW - -


ORDERING GUIDE

EXAMPLE: AE-RC-APB-XXW24-28CDMH-01

FIXTURE FAMILY	POWER	SIZE	CONTROLS	INPUT VOLTAGE
AE-RC-APB	-XXW		-	
AE-RC-APB ALPS Evolve series commercial office backlit panel	-XXW 2x4: 30-40-50W 2x2: 25-30-35W 1x4: 25-30-35W CCT Selectable: 3500/4000/5000K	22 2'x2' housing 3,125-3,750-4,375 lumens	-28CDM 0-10V external dimming down to 10%	H-02 120-347Vac
		24 2'x4' housing 3,750-5,000-6,250 lumens	-28CDS Microwave Motion Sensor *ONLY for 120-277V*	L-01 120-277Vac
		14 1'x4' housing 3,125-3,750-4,375 lumens		

PRODUCT DIMENSIONS

2x2

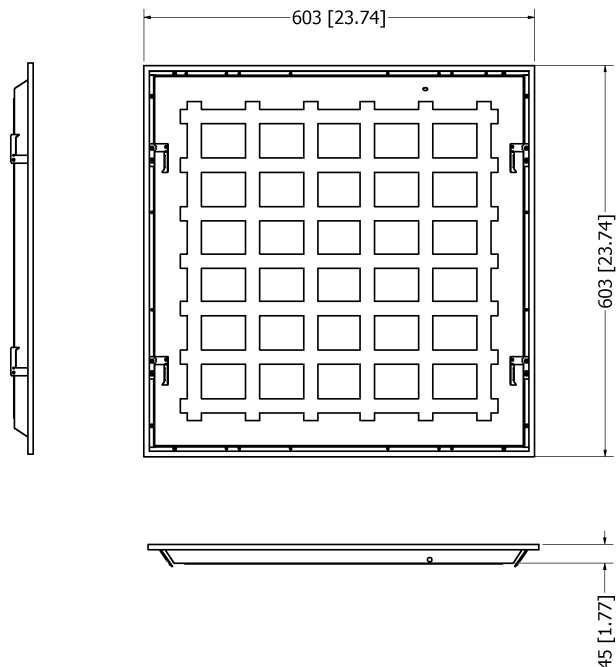

ALPS EVOLVE SERIES


RECESSED COMMERCIAL LUMINAIRES

Flat Panel


DATE			
PROJECT NAME			
TYPE			
QTY			
ORDERING CODE	AE-RC-APB-XXW	-	

PRODUCT DIMENSIONS

1x4

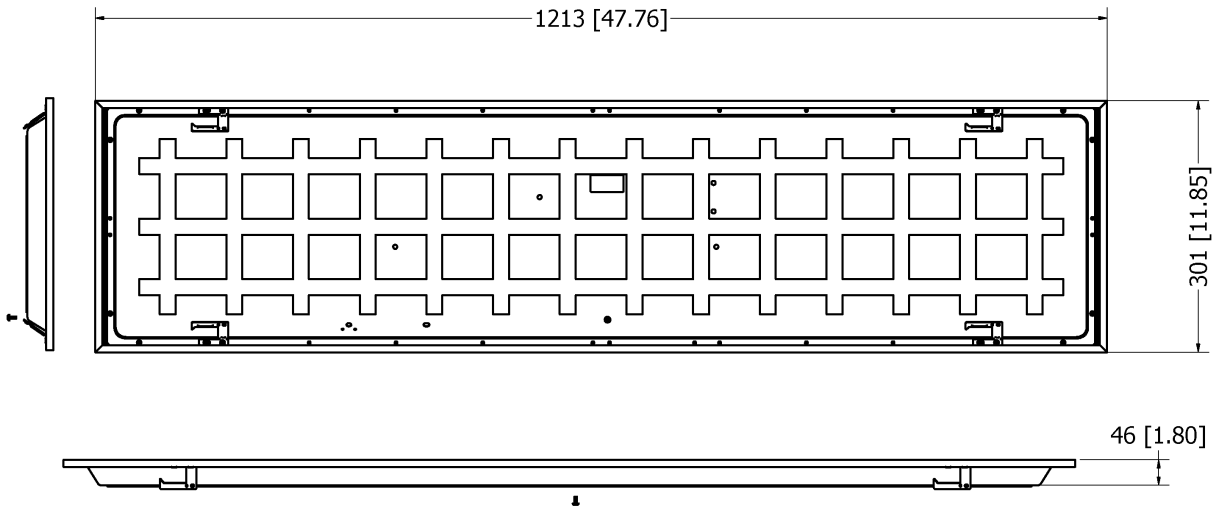

2x4

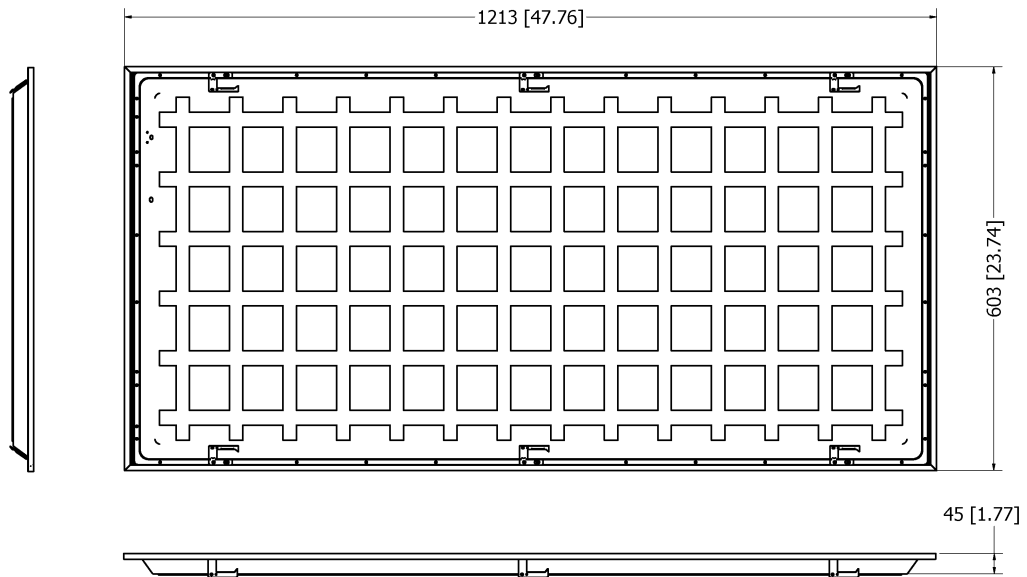

ALPS EVOLVE SERIES

RECESSED COMMERCIAL LUMINAIRES

Flat Panel

DATE				
PROJECT NAME				
TYPE				
QTY				
ORDERING CODE	AE-RC-APB-XXW		-	

ACCESSORIES

Ordered separately, field installed

GYP SUM KIT

Recessed Gypsum



DIMENSIONS

LENGTH	LENGTH	WIDTH	HEIGHT
2 X 4	1247 mm 49.1"	638 mm 25.1"	38mm 1.5"
2 X 2	638 mm 25.1"	638 mm 25.1"	38mm 1.5"
1 X 4	1247 mm 49.1"	338 mm 13.3"	38mm 1.5"

ORDERING CODE

AE-RC-MBGYPK1X4

AE-RC-MBGYPK2X2

AE-RC-MBGYPK2X4

SURFACE MOUNT KIT

DX,DXT GRID, Surface Mount



DIMENSIONS

LENGTH	LENGTH	WIDTH	HEIGHT
2 X 4	1219 mm 48"	609 mm 24"	50 mm 2"
2 X 2	609 mm 24"	609mm 24"	50mm 2"
1 X 4	1219 mm 48"	309 mm 12.2"	50 mm 2"

ORDERING CODE

AE-RC-MBSMK14

AE-RC-MBSMK22

AE-RC-MBSMK24

HANGING KIT



ORDERING CODE

AE-RC-MB-HK

ALPS EVOLVE SERIES

RECESSED COMMERCIAL LUMINAIRES

Flat Panel

DATE			
PROJECT NAME			
TYPE			
QTY			
ORDERING CODE	AE-RC-APB-XXW		-


LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:


LUMEN ESTIMATE ADJUSTMENT FACTORS				
CCT	3000K	3500K	4000K	5000K
PREMIUM (80CRI)	0.94	0.97	1	1.03

PHOTOMETRIC DATA

AE-RC-APB-35W22-28CDMH-01 (3000K)

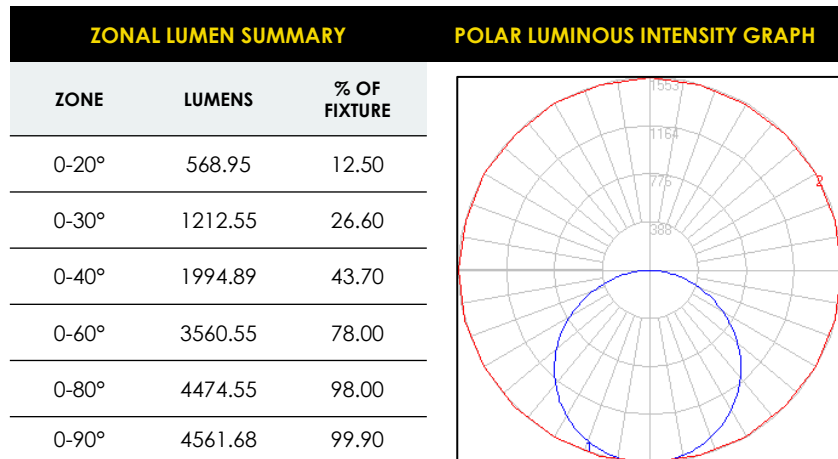

AE-RC-APB-40W24-28CDMH-01 (5000K)

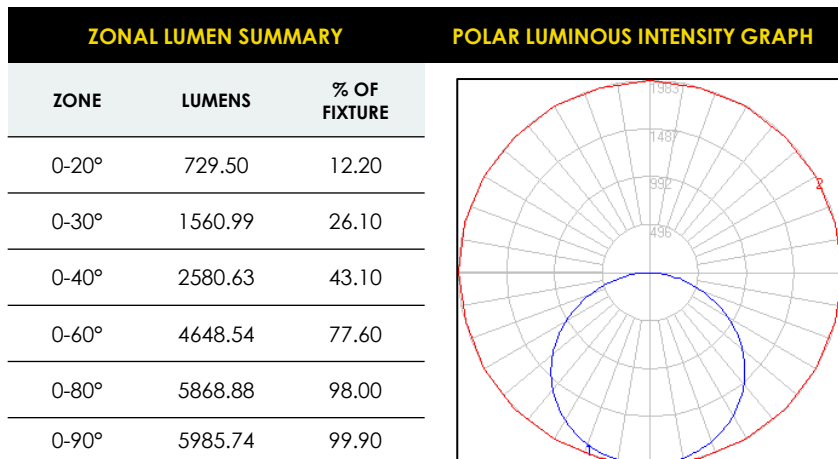

ALPS EVOLVE SERIES

RECESSED COMMERCIAL LUMINAIRES

Flat Panel

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-RC-APB-XXW

DLC MODELS

DLC MODEL	PRODUCT ID
AE-RC-APB-20W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-5ELXM9
AE-RC-APB-20W22-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-UFCYPQ
AE-RC-APB-25W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-XG2TN7
AE-RC-APB-25W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-9TOLAY
AE-RC-APB-25W22-28[CDM,CDS,CDE,CSE][L,H]-02	S-I06RL3
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-013000K	S-Q4XGVS
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-013500K	S-1WCFKE
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-014000K	S-BCJ30R
AE-RC-APB-25W22-28[DDM,DDS,DDE,DSE][L,H]-015000K	S-ZU2P1Y
AE-RC-APB-25W22-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-NA173X
AE-RC-APB-30W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-QGPMO
AE-RC-APB-30W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-ML7IXT
AE-RC-APB-30W22-28[CDM,CDS,CDE,CSE][L,H]-02	S-UKSVL4
AE-RC-APB-30W22-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-OA21HW
AE-RC-APB-30W24-28[CDM,CDS,CDE,CSE][L,H]-02	S-TOVI16
AE-RC-APB-35W14-28[CDM,CDS,CDE,CSE][L,H]-02	S-IWZN5H
AE-RC-APB-35W14-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-9FO1XG
AE-RC-APB-35W22-28[CDM,CDS,CDE,CSE][L,H]-02	S-CLT4PE
AE-RC-APB-35W22-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-GZBDWS
AE-RC-APB-35W24-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-D2YEFN
AE-RC-APB-36W14-28[RDM,RDS,RDE,RSE,CDM,CDS,CDE,CSE][L,H]-01	S-HWDTKJ
AE-RC-APB-40W24-28[CDM,CDS,CDE,CSE][L,H]-02	S-QIA1FD
AE-RC-APB-40W24-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-1RDUFG
AE-RC-APB-45W24-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-LQKW75
AE-RC-APB-50W24-28[CDM,CDS,CDE,CSE][L,H]-02	S-G7TPZE
AE-RC-APB-50W24-28[RDM,RDS,RDE,RSE,CDM,CDE,CSE][L,H]-01	S-Y72LOO

ALPS EVOLVE SERIES

RECESSED COMMERCIAL LUMINAIRES

Flat Panel

DATE			
PROJECT NAME			
TYPE			
QTY			
ORDERING CODE	AE-RC-APB-XXW	-	

OVERVIEW




VOLTAGE RATING

Multiple input voltage ratings, 120-277Vac or 120-347Vac, perfect for both American and Canadian Markets.

MULTIPLE PACKAGES

Select from the standard 0-10V dimming model or add the additional 90-minute emergency battery back-up kit.

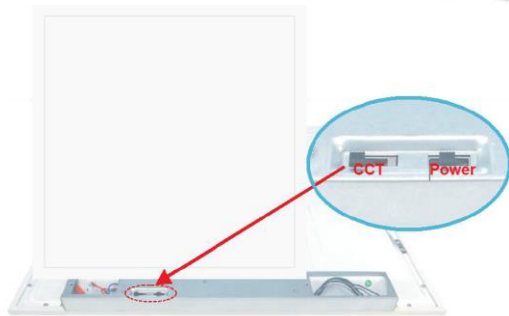

THIN PROFILE

Ultra-thin housing with polystyrene reflector enable the 2nd generation Alps fixture to be extremely lightweight while providing an elegant appearance.

