

CLARITY

DECORATIVE LIGHT

CASA SERIES | Vanity Light


eralux[®]

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				





DYNAMIC MENU

Order Information	Page 2
Dimensions	Page 2
Photometric Data	Page 3

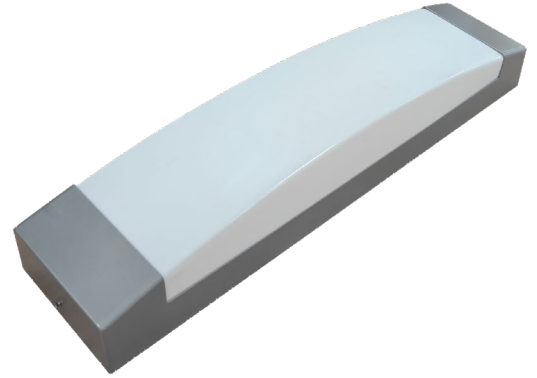

SPECIFICATIONS

Input Voltage	120-277V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming	0-10V
CRI	80 CRI
CCT	<div style="display: flex; gap: 10px;"> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #fff9c4; display: flex; align-items: center; justify-content: center;">27K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #fff176; display: flex; align-items: center; justify-content: center;">30K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #fff9c4; display: flex; align-items: center; justify-content: center;">35K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #bbdefb; display: flex; align-items: center; justify-content: center;">40K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #b39ddb; display: flex; align-items: center; justify-content: center;">50K</div> </div>
Efficacy	~50 lm/w
Length	2'
Power	32W
Ambient Temperature Range	-20°C to 45°C
Mounting Options	Wall mount
Fixture Finish	Brushed nickel 



PRODUCT FEATURES



Damp Location

PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 50,000 hours


Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

ORDERING GUIDE

CS-CR	-02	-32W	-5CCT	-SV
CS-CR Clarity Decorative Vanity Light	-02 2 Ft	-32W 32W 1600 lm	-5CCT 27/30/35/40/50K CCT Switchable	-SV Silver Brushed Nickel

Fixture Family	Length	Power	CCT	Finish
-----------------------	---------------	--------------	------------	---------------

DIMENSIONS – FIXTURE AND MOUNTING

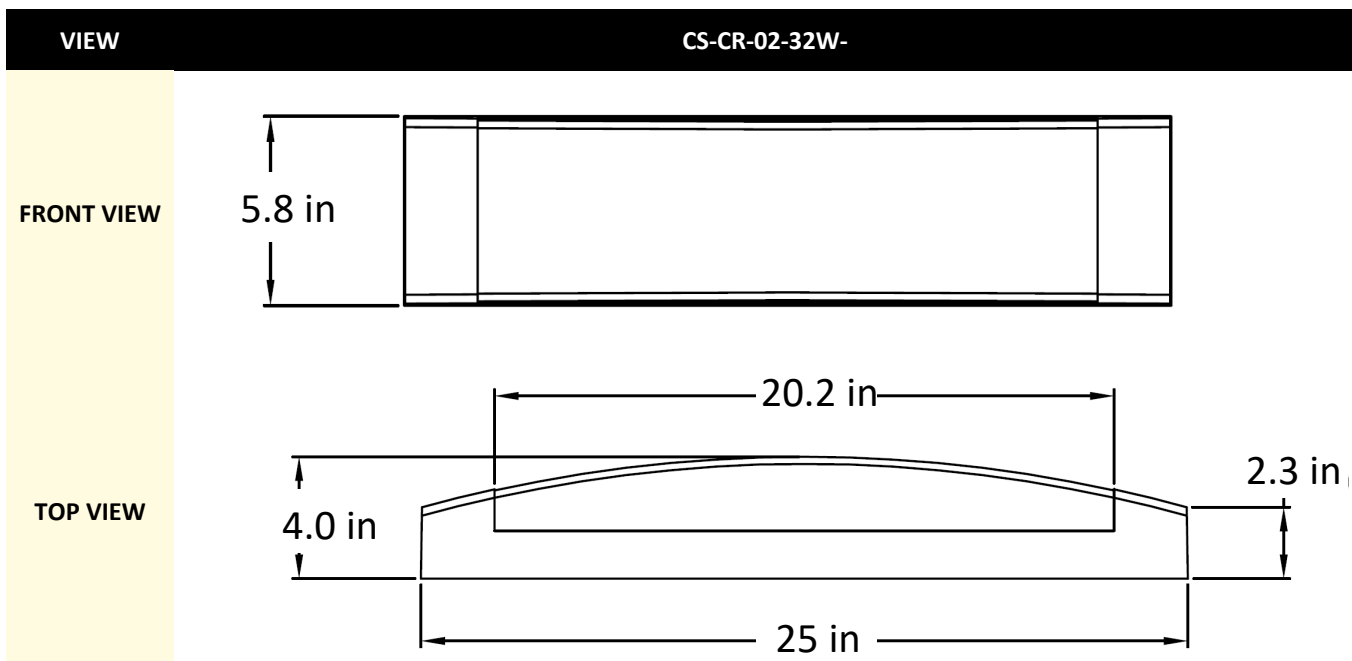


PHOTOMETRIC DATA

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
CS-CR-02-32W-		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width		
Wattage	20W	0-20°	207.49	9.5		Illuminance at a Distance Center Beam fc Beam Width			
CCT	5000K	0-30°	447.47	20.5		2.5R	89.1 fc	7.9 ft	11.9 ft
Distribution	130°	0-40°	746.06	34.2		5.0R	22.3 fc	15.7 ft	23.7 ft
Length	2ft	0-60°	1376.66	63.2		7.5R	9.9 fc	23.6 ft	35.6 ft
		0-80°	1812.85	83.2		10.0R	5.57 fc	31.4 ft	47.5 ft
		0-90°	1918.48	88.1	12.5R	3.56 fc	39.3 ft	59.3 ft	
					15.0R	2.47 fc	47.1 ft	71.2 ft	

■ Vert. Spread: 115.1°
■ Horiz. Spread: 134.3°

OVERVIEW

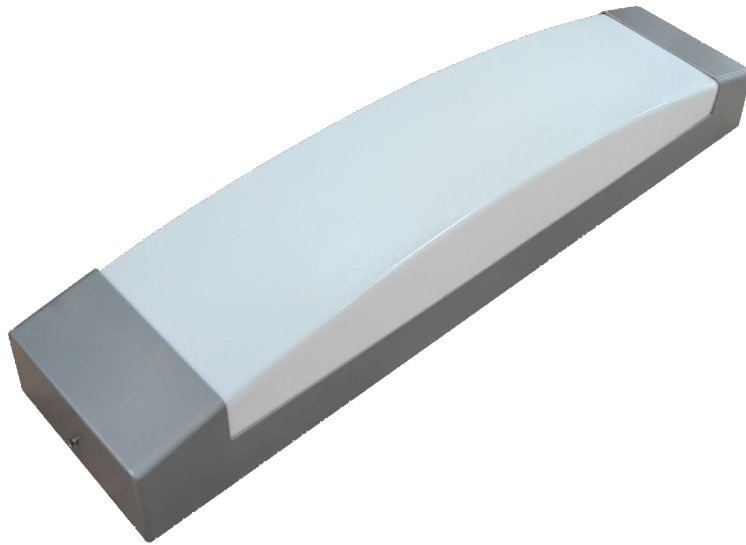

Innovative Design

- Rectangular shape
- Highly durable polycarbonate and high transmittance lens.
- Metal housing



Options

- Five CCTs switchable
- Brushed nickel finish
- 32W power



Tests And Certifications



Mounting Available

- Wall mount

