

ELEGANZA SLIM

CYLINDER LIGHTING

Indoor Pendant



eralux®



The **ELEGANZA SLIM** Cylinder series is a continuation of the ELEGANZA cylinder family. It is a beautiful and elegant solution for open ceilings, and it has a distinctive design featuring machined aluminum body, attention to details including the installation process. The modularity of ELEGANZA enables stem mount, surface mount, cable mount, and pendant mount application. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, robustness and quality.

DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

OPERATING & ELECTRICAL

INPUT VOLTAGE	120-277V
POWER FACTOR	0.9
DIMMING	TRIAC & 0-10V dimming
TOTAL HARMONIC DISTORTION (THD)	<20%

PERFORMANCE

LUMENS PER WATT	80-85 LPW at 90CRI
POWER CONSUMPTION	Up to 15W
BEAM ANGLE	15°, 25°, 40°, 60°

MECHANICAL & HOUSING

HOUSING	Aluminum die cast
LENS	Highly durable polycarbonate lens
FINISH	White, black, silver
POWER SUPPLY	Factory wired electronic LED driver
LED BOARD	COB

APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE	-10 °C to 35°C
---------------------------	----------------

COMPATIBLE MOUNTING

MOUNTING	Stem Cable Surface Mount
----------	--------------------------------

WARRANTY

SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES). (L85 at 50,000 hours)

ELEGANZA SLIM

CYLINDER LIGHTING

Indoor Pendant

DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

ORDERING GUIDE

EXAMPLE: AE-TL-EZS-10-SF-10-P30FL-WH

FIXTURE FAMILY	HEIGHT	MOUNTING METHOD	POWER	CCT	BEAM ANGLE	FINISH
AE-TL-EZS	-10	-SF	-15	-P		-
AE-TL-EZS ERALUX Eleganza Slim indoor cylindrical pendant fixture	-10 10.91" fixture height	-SF Surface mounted fixture mounting method	-15 15 watts: 1,200 lumens at 90CRI 3000K	-P30 3000K CCT	SP 15° beam angle	-WH White powder coat finish RAL9003
				-P35 3500K CCT	NF 25° beam angle	-BK Black powder coat finish RAL9004
					FL 40° beam angle	-SV Silver powder coat finish RAL9006
				-P40 4000K CCT	WF 60° beam angle	

FIXTURE FAMILY	HEIGHT	MOUNTING METHOD	CABLE LENGTH	POWER	CCT	BEAM ANGLE	FINISH
AE-TL-EZS	-10	-PC		-15	-P		-
AE-TL-EZS ERALUX Eleganza Slim indoor cylindrical pendant fixture	-10 10.91" fixture height	-PC Cable mounted fixture mounting method	-12 12' cable Cable Adjustable	-15 15 watts: 1,200 lumens at 90CRI 3000K	-P30 3000K CCT	SP 15° beam angle	-WH White powder coat finish RAL9003
					-P35 3500K CCT	NF 25° beam angle	-BK Black powder coat finish RAL9004
						FL 40° beam angle	-SV Silver powder coat finish RAL9006
					-P40 4000K CCT	WF 60° beam angle	

FIXTURE FAMILY	HEIGHT	MOUNTING METHOD	STEM LENGTH	POWER	CCT	BEAM ANGLE	FINISH
AE-TL-EZS	-10	-SM		-15	-P		-
AE-TL-EZS ERALUX Eleganza Slim indoor cylindrical pendant fixture	-10 10.91" fixture height	-SM Stem mounted fixture mounting method	-01 1' stem	-15 15 watts: 1,200 lumens at 90CRI 3000K	-P30 3000K CCT	SP 15° beam angle	-WH White powder coat finish RAL9003
			-02 2' stem			NF 25° beam angle	-BK Black powder coat finish RAL9004
					-03 3' stem	FL 40° beam angle	
			-04 4' stem		-P40 4000K CCT	WF 60° beam angle	-RALXXXX* Customized finish

* Custom color finish available. Please contact us for more information and pricing

ELEGANZA SLIM






CYLINDER LIGHTING

Indoor Pendant

DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

CUSTOMED FINISH EXAMPLES FOR ELEGANZA SERIES

* Please contact manufacturer for more information and pricing for customized finishes



eralux® ELEGANZA SLIM





CYLINDER LIGHTING

Indoor Pendant




DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

DIMENSIONS

Surface Mount: AE-TL-EZS-15-SF

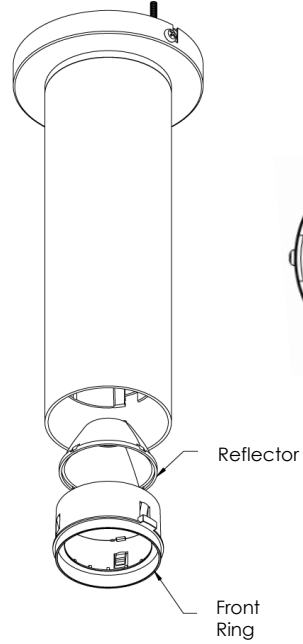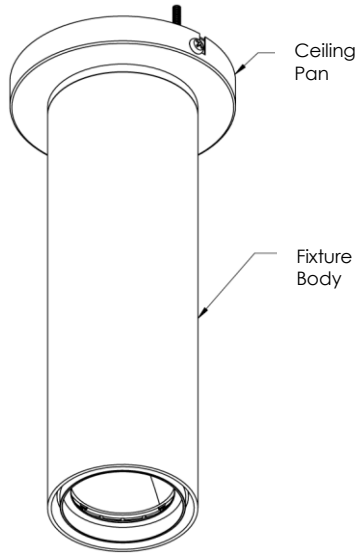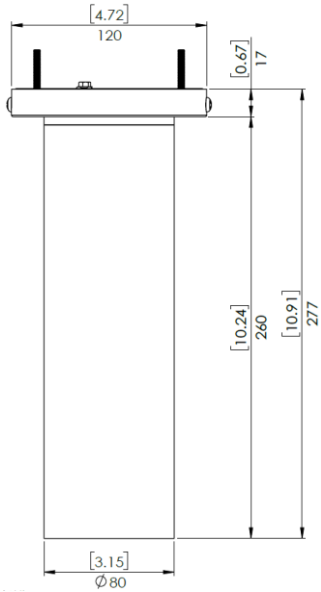

Cable Mount: AE-TL-EZS-15-PC

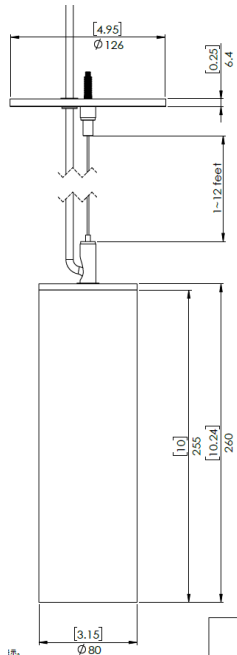

eralux®
ELEGANZA SLIM




CYLINDER LIGHTING

Indoor Pendant

DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

DIMENSIONS

Stem Mount: AE-TL-EZS-15-SM

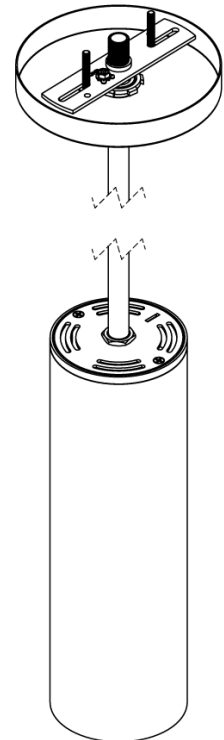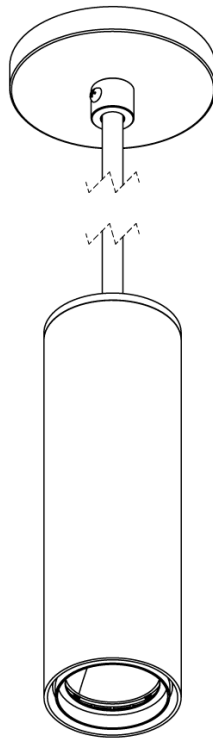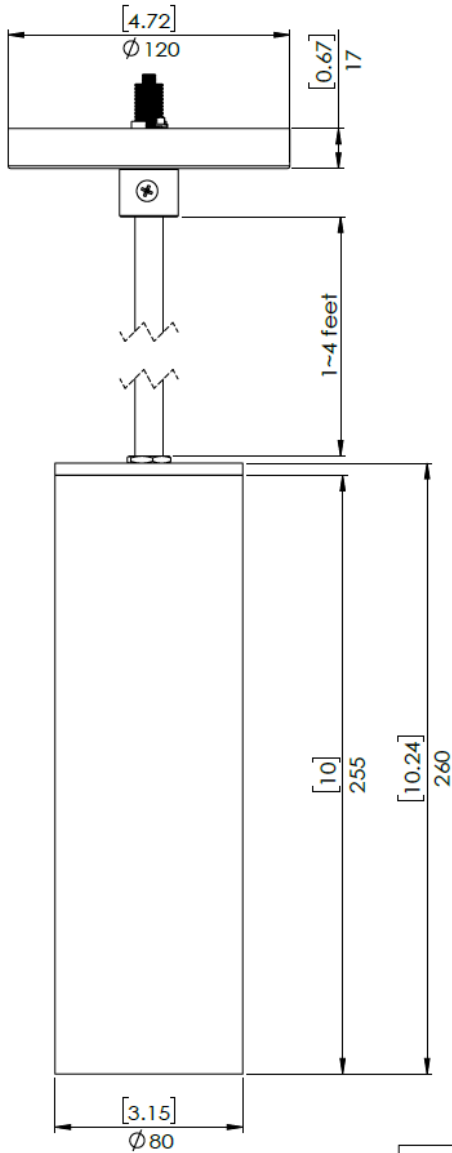

eralux® ELEGANZA SLIM

CYLINDER LIGHTING
Indoor Pendant

DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:



LUMEN ESTIMATE ADJUSTMENT FACTORS				
CCT	2700K	3000K	3500K	4000K
NORMAL (80CRI)	0.94	1	1.02	1.03
PREMIUM (90CRI)	0.78	0.81	0.84	0.86
SUPERIOR (HIGH GAI)	N/A	0.73	0.78	N/A

PHOTOMETRIC DATA



GRID DISTANCES WITH A MOUNTING HEIGHT OF 10' AFG

POLAR LUMINOUS INTENSITY GRAPHS

AE-TL-EZS10-XX-15-P30FL

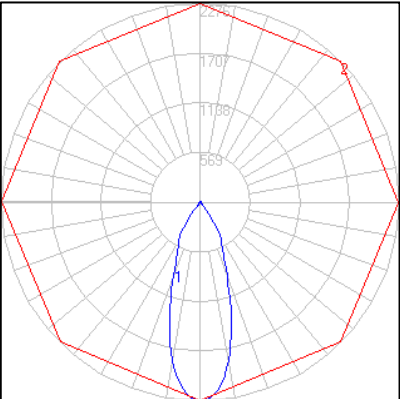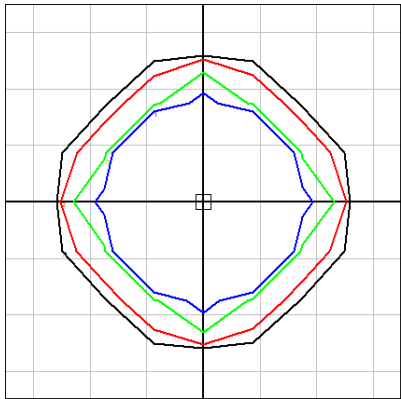

AE-TL-EZS10-XX-15-P30WF

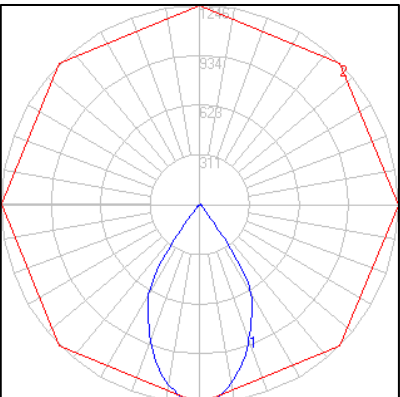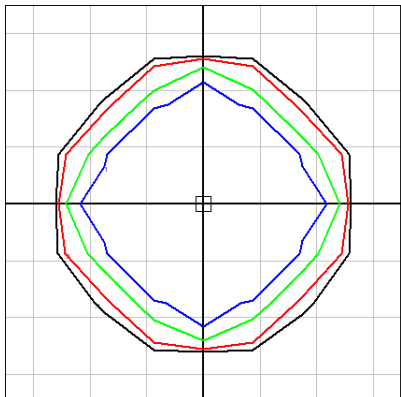

eralux®
ELEGANZA SLIM

CYLINDER LIGHTING
 Indoor Pendant

DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

DIMMER COMPATIBILITY LIST

TRIAC/ELV Dimmer @120VAC
Lutron SLV-600X
Lutron S2-LX
Lutron GL-600H
Lutron NFTU-5A
Lutron DVLV-600P
Leviton 6602-X
Leviton 6681-X
Leviton 6683-X
Leviton 6684-X
Leviton 700-X
Leviton 705-X
Leviton 6633
Leviton 6674

TRIAC/ELV Dimmer @120VAC
Leviton IPI06-1LZ
Cooper 9530XXX
Lightolier MP600X
Advance SR150LED120

0-10V Dimmer@120VAC
Lutron, Nova series (part number NFTV)
Lutron, Diva series (part number DVTV)
Leviton, IllumaTech series (part number IP710-DL)

ELEGANZA SLIM

CYLINDER LIGHTING

Indoor Pendant

DATE	
PROJECT NAME	
TYPE	
QTY	
NOTES	

Indoor Pendant

OVERVIEW



Surface mount Cable mount Stem mount



MULTIPLE MOUNTING METHODS

Select from multiple mounting styles including surface, cable, and stem mount.

COLOR OPTIONS

Select from standard white, black, and silver or inquire about a custom finish unique for your project.

UNIQUE FIXTURE

The Eleganza Slim features several beam angles including 15°, 24°, 40° and 60°.

PREMIUM MATERIALS

Constructed from aluminum diecast for excellent fixture structure strength, and for superior thermal heat management, all ensuring long-lasting LED and driver function.



Customized Silver



Customized Tiffany

