EXITA SERIES









EMERGENCY LIGHTING EXITA CR-7037R

The CR-7037R has long life high intensity LEDs, it is encased in a fire-resistant thermoplastic ABS housing, while performing in damp locations

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7037R

OPERATING & ELECTRICAL	
INPUT VOLTAGE	120/277 Vac
INPUT RATING	1.2W, 100mA

APPLICATION CONDITION	
AMBIENT TEMPERATURE RANGE	0°C to 40°C

	PERFORMANCE
POWER CONSUMPTION	1.2 W
RUN TIME ON BATTERY	90 min

COMPATIBLE MOUNTI	NG
MOUNTING	Wall Ceiling End

WARRANTY	
SYSTEM WARRANTY	2 years


MECHANICAL & HOUSING	
HOUSING	Injection-molded Thermoplastic ABS UL-94-V0 flame-retardant fire-resistant
FINISH	Powder Coated White
POWER SUPPLY	Factory wired electronic LED driver

APPROVALS	
Certification	UL-924 NFPA 101 Life Safety Code NEC OSHA CEC Title 20 Compliant



DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7037R

PRODUCT DIMENSIONS

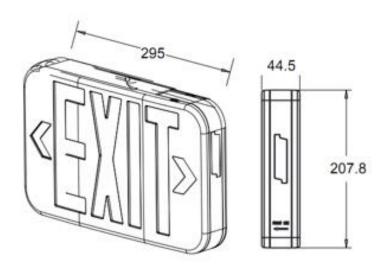

ORDERING CODE

FIXTURE FAMILY
CR-7037R
CR-7037R ERALUX EMERGENCY EXIT SIGN, RED COLORED LETTERS

eralux® **EXITA SERIES**

EMERGENCY LIGHTING EXITA CR-7037R

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7037R

OVERVIEW

MULTIPLE MOUNTING

It comes with different mounting types. It can be installed on wall, end or even on ceiling.

CONFIGURATIONS

Universal field-selectable single/double-face, with fully illuminated 6" characters using long-life, high intensity LEDs.





BATTERY PERFOMANCE

The battery is made of 1.2V NiCad material and it is maintenance free. Its charging time is 24 hours, and it lasts for 90 minutes.

VALUE ENGINEERED DESIGN

The housing is made of injectionmolded thermoplastic ABS to provide safety against flame and fire.

