

EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7090



eralux[®]



The CR-7090 has long life high intensity LEDs, it is encased in a fire-resistant thermoplastic ABS housing, while performing in damp locations

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7090

OPERATING & ELECTRICAL

INPUT VOLTAGE 120/277 Vac

INPUT RATING 0.9w, 110mA

PERFORMANCE

POWER CONSUMPTION 0.9 W

RUN TIME ON BATTERY 90 mins

LAMPS 2 X 2.4W fully adjustable lamp heads

MECHANICAL & HOUSING

HOUSING Injection-molded Thermoplastic ABS
UL-94-V0 flame-retardant
fire-resistant

FINISH Powder Coated White

POWER SUPPLY Factory wired electronic LED driver

APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE 0 °C to 40°C

COMPATIBLE MOUNTING

MOUNTING Wall
Ceiling

WARRANTY

SYSTEM WARRANTY 2 years

RECOMMENDED BATTERY REPLACEMENT 2 years

LUMEN MAINTENANCE L85 at 50,000 hours
Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES). (L85 at 50,000 hours)

APPROVALS

Certification **UL-924**
NFPA 101 Life Safety Code
NEC
OSHA
CEC Title 20 Compliant


EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7090

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7090

PRODUCT DIMENSIONS

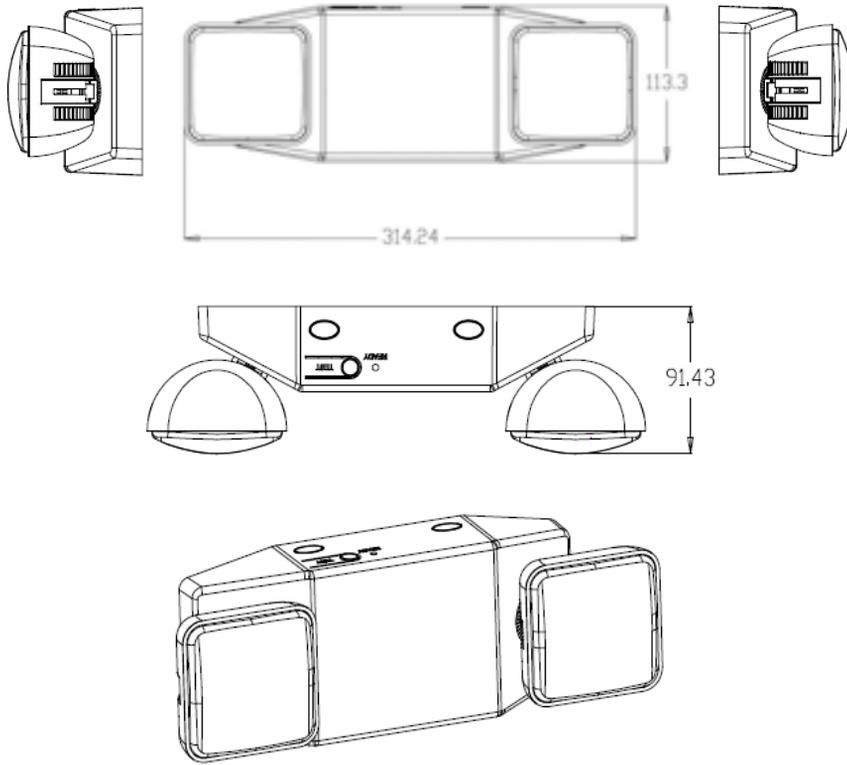

ORDERING CODE

FIXTURE FAMILY	
CR-7090	
CR-7090	ERALUX EMERGENCY EXIT SIGN

EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7090

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7090

OVERVIEW

MULTIPLE MOUNTING

It comes with two different mounting types. It can be installed on wall, or on ceiling.

ADJUSTABLE LAMP HEAD

Each lamp head is fully adjustable they can rotate in different directions.

Each head contains 12PCS 0.2W to provide total 4.8W.



BATTERY PERFORMANCE

The battery is made of 3.6V NiCad material and it is maintenance free. Its charging time is 24 hours, and it lasts for 90 minutes.

VALUE ENGINEERED DESIGN

The housing is made of injection-molded thermoplastic ABS to provide safety against flame and fire.

