

EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7108R



eralux®



The CR-7108R has long life high intensity LEDs, it is aluminum housing and high-grade acrylic diffuser, while performing in damp locations.

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7108R

OPERATING & ELECTRICAL

INPUT VOLTAGE 120/347 Vac

INPUT RATING 1.2W, 200mA

PERFORMANCE

POWER CONSUMPTION 1.2 W

RUN TIME ON BATTERY 120 mins

MECHANICAL & HOUSING

HOUSING Aluminum housing
High-grade acrylic diffuser
UL-94-V0 flame-retardant, fire-resistant

FINISH Silver

POWER SUPPLY Factory wired electronic LED driver

APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE 0 °C to 40°C

COMPATIBLE MOUNTING

MOUNTING Wall
End
Ceiling

WARRANTY

SYSTEM WARRANTY 2 years

RECOMMENDED BATTERY REPLACEMENT 2 years

APPROVALS

Certification **UL-924**
NFPA 101 Life Safety Code
NEC
OSHA
CEC Title 20 Compliant


EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7108R

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7108R

PRODUCT DIMENSIONS

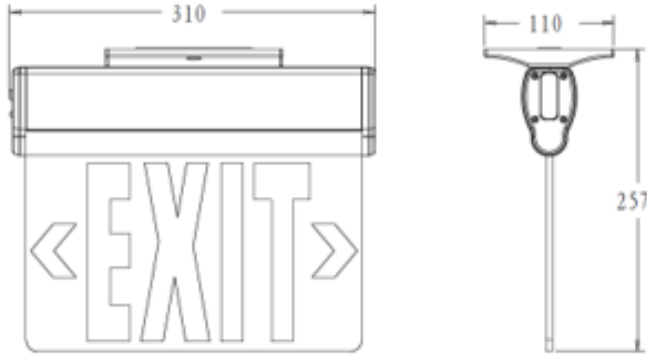

ORDERING CODE

FIXTURE FAMILY
CR-7108R
CR-7108R ERALUX EMERGENCY EXIT SIGN, RED COLORED LETTERS

EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7108R

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7108R

OVERVIEW

MULTIPLE MOUNTING

It comes with different mounting types. It can be installed on wall, ceiling or even on end.



CONFIGURATIONS

High grade acrylic diffuser, with fully illuminated 6" characters using long-life, high intensity LEDs.

BATTERY PERFORMANCE

The battery is made of 4.8V NiCad material and it is maintenance free. Its charging time is 24 hours, and it lasts for 120 minutes.

VALUE ENGINEERED DESIGN

The housing is made of aluminum and high-grade acrylic diffuser to provide safety against flame and fire.

