

eralux[®]

Architectural Linears



G5

105-120 Lm/W

~1000lm/ft

Direct Only

Lumen Switchable

2ft: 2100lm

4ft: 2100/3150/4200lm

5ft: 2100/3150/4200lm

6ft: 3600/4800/6000lm

8ft: 4800/8400lm



Aperture 2.5in

Custom Connections/Shapes

90° Corner, 120° Corner, X, T
Continuous Runs

Input Voltage 120-347V

Dimming 0-10V, TRIAC

CCT Switchable

3000K/3500K/4000K


3000K/4000K/5000K

Housing Extruded Aluminum

Lens Polycarbonate, Drop lens, Wall wash

Finish

Black, White, Silver, Custom



SPT

105 Lm/W

~1300lm/ft

Direct / Indirect


Lumen Switchable

2ft: 2100/3150lm

4ft: 3150/4200/5250lm

6ft: 5250/6300/8400lm

8ft: 6300/8400/10500lm

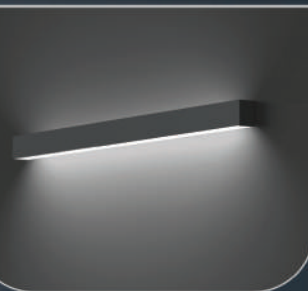

G6

87-91 Lm/W

~800lm/ft

Direct Only


Lumen Switchable

2ft: 1780lm

4ft: 1780/2670/3560lm

6ft: 2670/3560/4450lm

8ft: 3560/6230lm

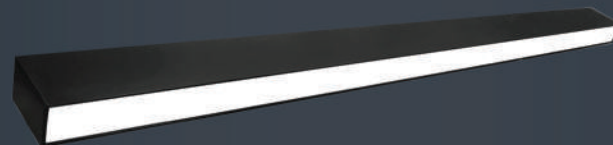

Aperture 1.5in

Custom Connections/Shapes

90° Corner, X, T
Continuous Runs

Input Voltage 120-347V

Dimming 0-10V, TRIAC

CCT Switchable


3000K/3500K/4000K

3000K/4000K/5000K

Housing Extruded Aluminum

Finish

Black, White, Silver, Custom



SPS

~1000lm/ft

Direct / Indirect


Lumen Switchable

2ft: 1640/2460lm

4ft: 2460/3280/4100lm

6ft: 4100/4920/6560lm

8ft: 4920/6560/8200lm



Prime

45-50 Lm/W

~625lm/ft

Lumen Switchable

2ft: 1000/1250lm

4ft: 2000/2500lm

6ft: 2800/3600lm

8ft: 4000/5000lm

Housing

Extruded Aluminum

Parabolic Lens



Aperture 2.5in

Connections

Continuous Runs

Input Voltage 120-347V


Direct / Indirect

Dimming 0-10V, TRIAC

CCT Switchable

3000K/3500K/4000K

3000K/4000K/5000K



Prime Shadow

45-50 Lm/W

~625lm/ft


Lumen Switchable

2ft: 1000/1250lm

4ft: 2000/2500lm

6ft: 2800/3600lm

8ft: 4000/5000lm

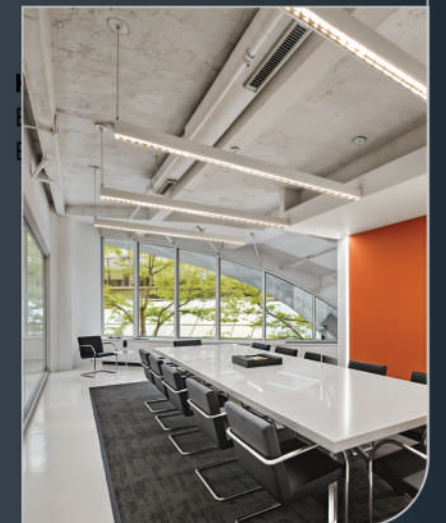

G6 Wall wash

75 Lm/W


~750lm/ft

Direct

Lumen Switchable

4ft: 3000lm

8ft: 6000lm



Aperture 1.5in

Connections

Continuous Runs

Input Voltage 120-347V

Dimming 0-10V

CCT Switchable

3000K/3500K/4000K

3000K/4000K/5000K

Housing

Extruded Aluminum

Finish

Black, White, Silver



SPS Wall wash

91 Lm/W


~1000lm/ft

Indirect

Lumen Switchable

4ft: 4500lm

8ft: 9000lm



F2 Series

98-100 Lm/W

Direct Only

Aperture 2in

Lumens

3ft: 2300lm

4ft: 3000lm

6ft: 4500lm

8ft: 6000lm

Custom Connections/Shapes

90° Corner, X, T

Continuous Runs

Input Voltage 120-277V

CCT Switchable


3000K/3500K/4000K

Housing


Extruded Aluminum

Finish

Black, White, Silver, Custom




F2 Surface Mount



F2 Mud Mud - 1 n



F2 Air Suspended



Atlantis

85-89 lm/W

680lm/ft

Direct Only

Aperture 2in

Lumens

3ft: 2720lm

4ft: 3400lm

6ft: 4080lm

8ft: 5440lm

Custom Connections/Shapes

90° Corner, Wall to Ceiling, Outer Corner, X, T
Continuous Runs

Input Voltage 120-277V

Dimming 1-10V

CCT


3000K/3500K/4000K

Housing


Extruded Aluminum

Finish

Black, White, Silver, Custom

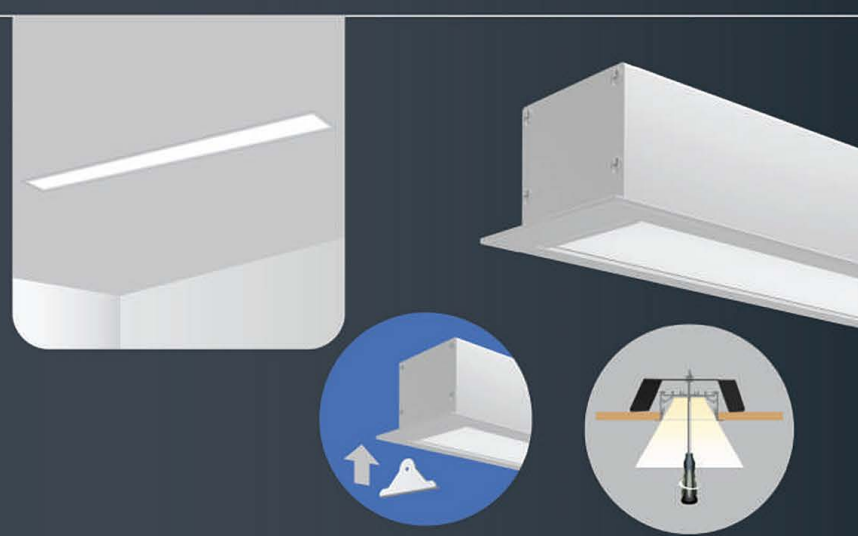

Easy installation

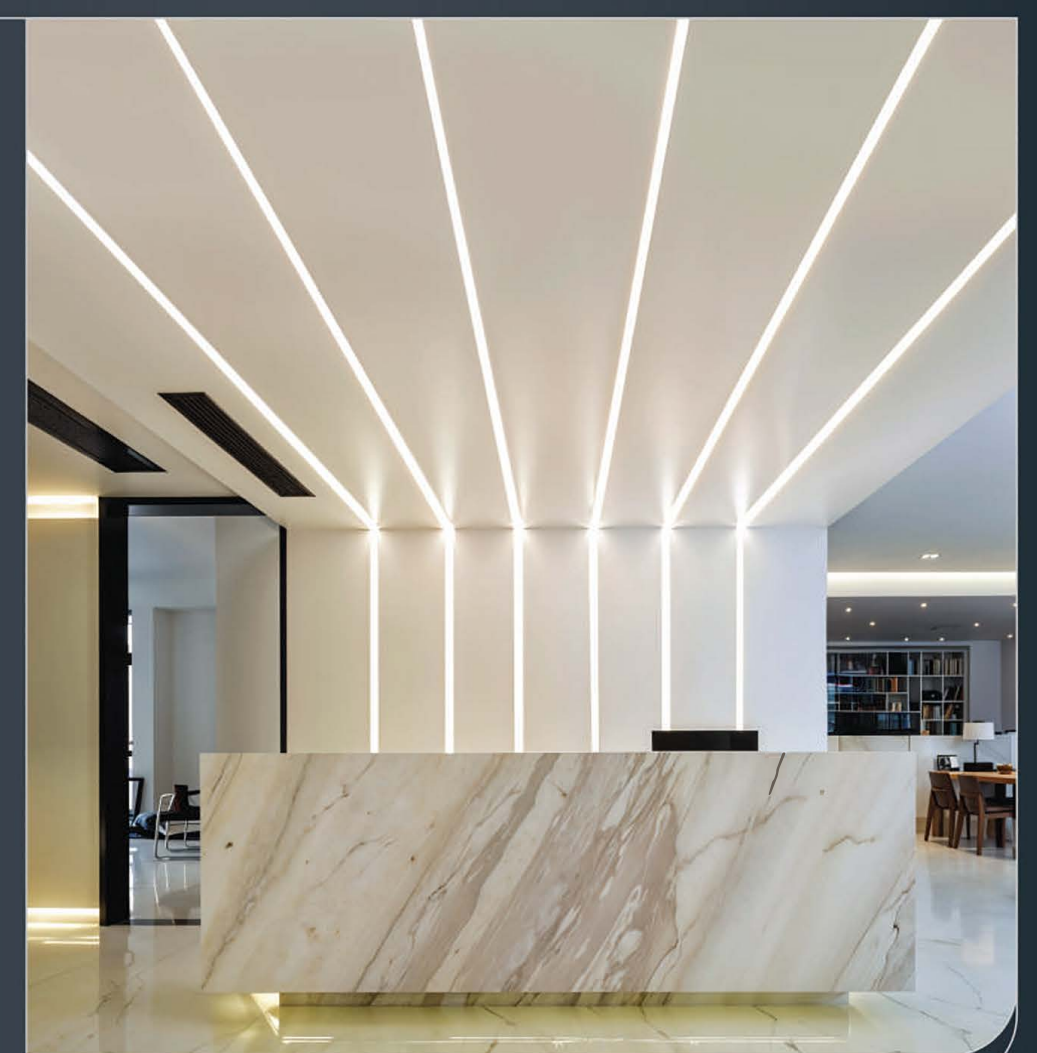

LX Series

Direct Only

Aperture 1.75in

Connections

Continuous Runs

Housing


Extruded Aluminum

Lens

UGR, Honeycomb, Optical, Louver

Finish

Black, White, Silver




Optical
~100lm/W
~625lm/ft

Lumen Switchable
4ft: 25W / 2,500 lm
6ft: 38W / 3,811 lm
8ft: 49W / 4,914 lm

CCT
3000K/3500K/4000K

Input Voltage
0-10V



Prismatic
~80lm/W
~620lm/ft

Lumen Switchable
4ft: 21/26/31W
1,714/2,122/2,401 lm
6ft: 36/41/46W
2,938/3,346/3,729 lm
8ft: 51/56/61W
4,162/4,570/4,972 lm

Input Voltage 0-10V

CCT Switchable
3000/3500/4000K

Louver

~62lm/W

~475lm/ft

Lumen Switchable

4ft: 231W | 1,920 lm

6ft: 46W | 2,849 lm

8ft: 61W | 3,778 lm

CCT

3000K/3500K/4000K

Input Voltage

0-10V



Honeycomb

~45lm/W

~350lm/ft

Lumen Switchable

4ft: 31W / 1408 lm

6ft: 46W / 2089 lm


8ft: 61W / 2771 lm


CCT


3000K/3500K/4000K

Input Voltage

0-10V

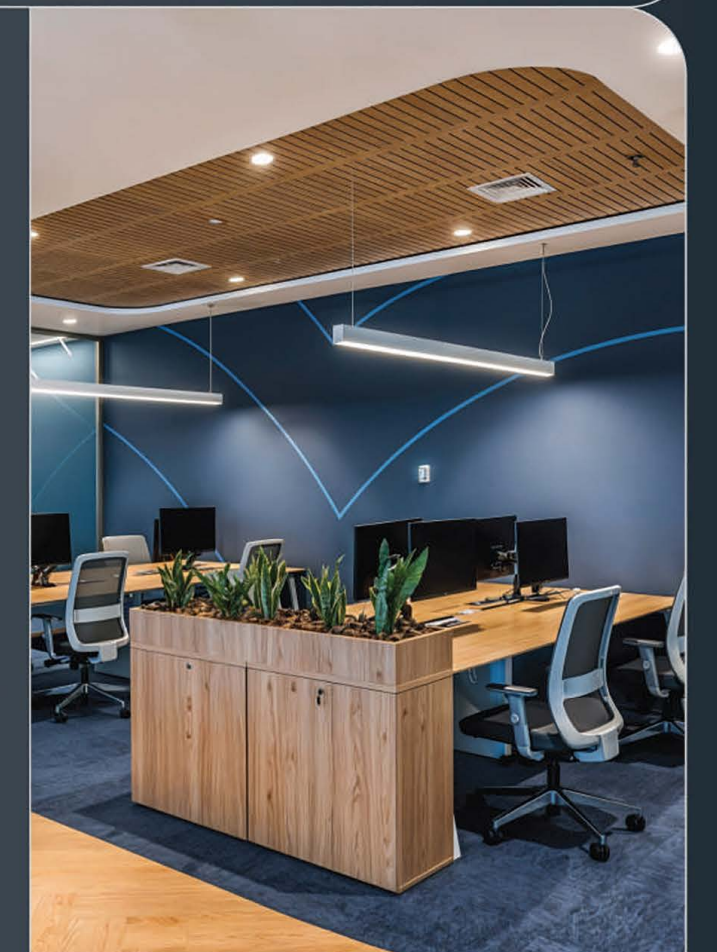

 eralux.com

 5650 Royalmount Ave, Mount Royal, Quebec
H4P 1K4 , Canada

 quotes@eralux.com

Experience the Difference

