

# G5 Recessed T-grid

## LINEAR FIXTURES

Linear Architectural Lighting



The G5 T-Grid series provide an unsurpassed flexibility for commercial offices. With a simple switch, the fixture can switch CCT and lumens. Long seamless rows are possible using custom lengths for starter, middle and ender. It is perfect for new buildings, upgrades and retrofit projects. This series has been redesigned to be easily mounted on most T grids ceilings.

eralux®



DATE							
PROJECT NAME							
TYPE							
QTY							
ORDERING CODE	AE-SF-G5CA				010	-R-	

### OPERATING & ELECTRICAL

INPUT VOLTAGE	120-347V
POWER FACTOR	0.9
DIMMING	0-10V
TOTAL HARMONIC DISTORTION (THD)	<20%

### PERFORMANCE

LUMENS PER WATT	105 LPW at 80CRI
POWER	40W
DISTRIBUTION	Lambertian

### MECHANICAL & HOUSING

HOUSING	Extruded aluminum for increased rigidity and strength
LENS	Highly durable frosted polycarbonate and high transmittance lens
FINISH	Nebula White Atomic Black
POWER SUPPLY	Factory wired electronic LED driver
LED BOARD	Discrete LED

### APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE	-10°C to 40°C
---------------------------	---------------

### COMPATIBLE MOUNTING

MOUNTING	Recessed (Non-IC rated)
----------	-------------------------

### WARRANTY

#### SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

#### LUMEN MAINTENANCE – L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

# G5 Recessed T-grid

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA 010 -R-

## ORDERING GUIDE

EXAMPLE: AE-SF-G5CA44030/35/40010WH-R-A-1DIM

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	MOUNTING	TYPE	DIMMING
AE-SF-G5	CA				010		-R-		
AE-SF-G5 ERALUX G5 linear architectural fixture	CA 120-347Vac input voltage	2 2 feet	20 20 watts: 2,100 lumens	30/35/40 3000/3500/4000K selectable CCT	010 0-10V external dimming down to 10%	WH-GB ERALUX Nebula White	-R- Recessed mounted on T-grids	A Stand alone	[LEAVE BLANK] 0-10V Standard
		4 4 feet	40 40 watts: 4,200 lumens			BK-GB ERALUX Atomic Black finish			
		5 5 feet	30/40/50 3000/4000/5000K selectable CCT	B Starter & Ender				-1DIM *	
		6 6 feet							50 50 watts: 5,250 lumens
		8 8 feet				70 70 watts: 8,400 lumens			C Middle

CAUTION: If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.

\* 1DIM available only in 120-277V, it works for 4,5,6,8 FT

**\*Maximum of 300 Wattages powered by 1 electrical drop\***

## POWER SWITCHABLE OPTIONS

2FT	Avg 105-120 LPW	20 watts	20W– 2100 lms
4/5FT		20/30/40 watts switchable	20W – 2100 lms
			30W - 3150 lms
			40W - 4200 lms
6FT		30/40/50 watts switchable	30W - 3600 lms
			40W - 4800 lms
			50W - 6000 lms
8FT		40/70 watts switchable	40W - 4800 lms
	70W - 8400 lms		

# G5 Recessed T-grid

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA
	010
	-R-

## ACCESSORIES

### EMERGENCY LED DRIVER (YT Series)

YT05E-XXL

YT08 E-XXL

YT15 E-XXL


YT20 E-XXL

OUTPUT POWER : 5 WATTS



OUTPUT POWER : 8 WATTS

OUTPUT POWER :12 WATTS

OUTPUT POWER :20 WATTS

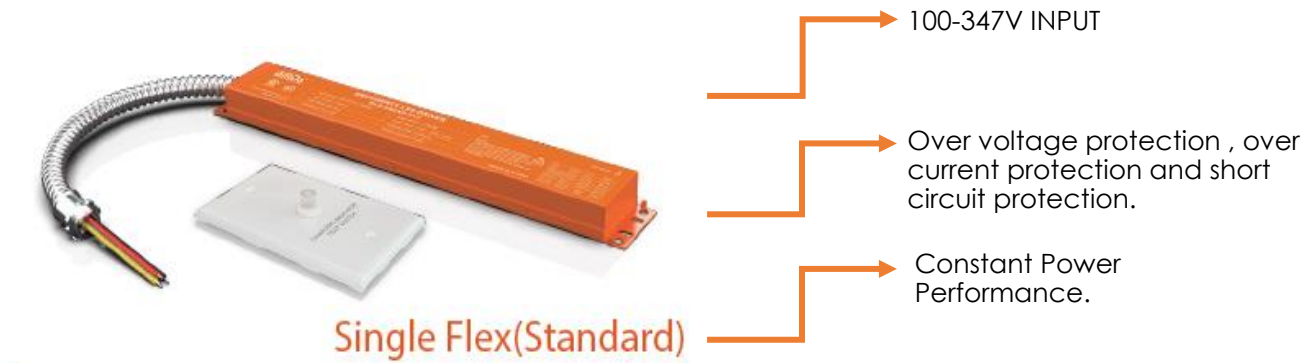

### Dimensions

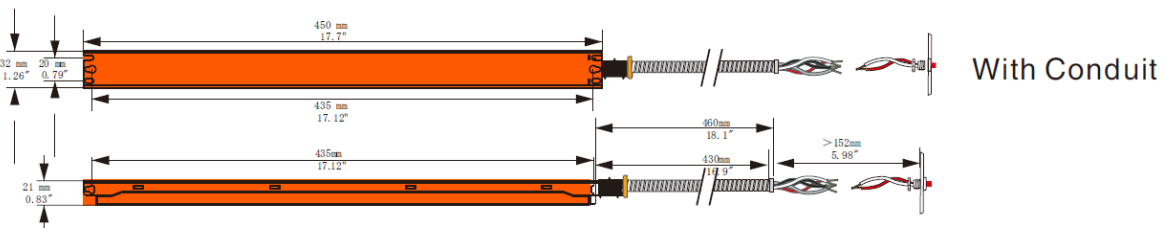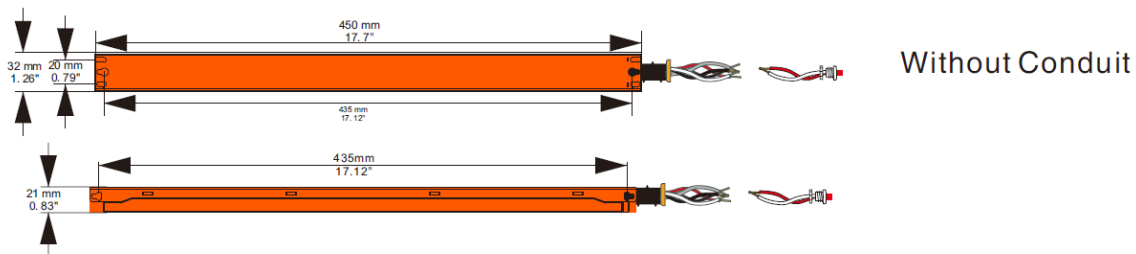

# G5 Recessed T-grid


LINEAR FIXTURES

Linear Architectural Lighting


DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA
	010
	-R-

## PRODUCT DIMENSION – 4FT


A – Stand alone

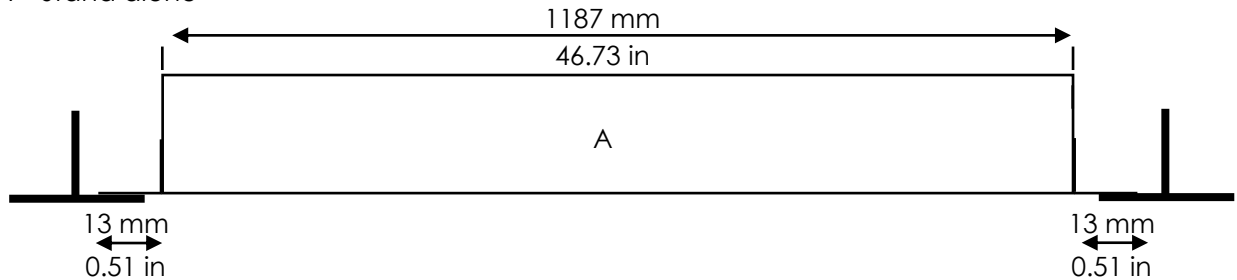



B – Starter & Ender

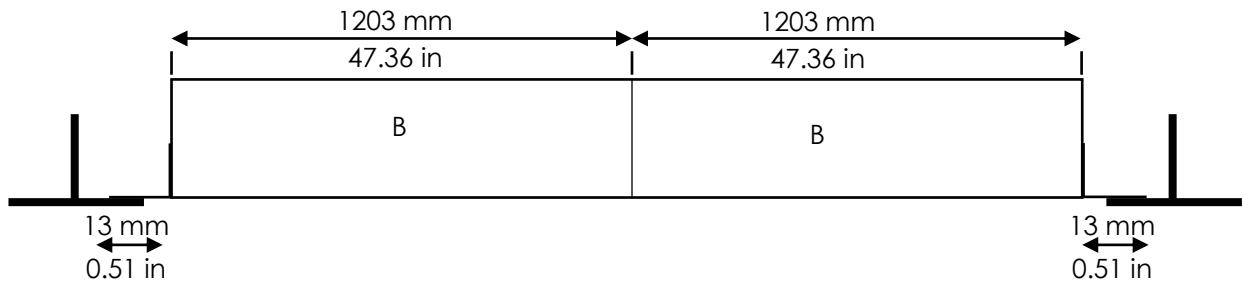

C – Middle

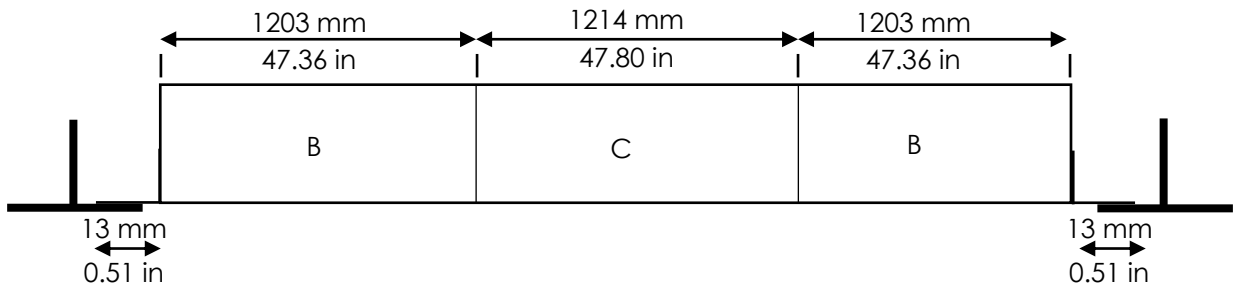

## CROSS DIMENSIONS

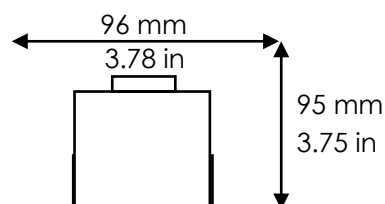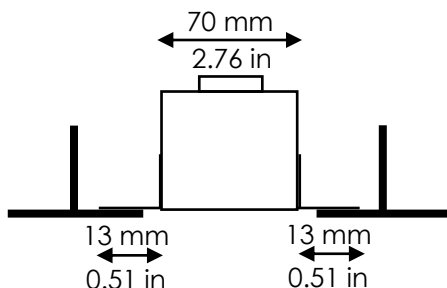

Page 3 of 7

Page 3 of 7

# G5 Recessed T-grid


LINEAR FIXTURES

Linear Architectural Lighting


DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA
	010
	-R-

## PRODUCT DIMENSION – 8FT


A – Stand alone

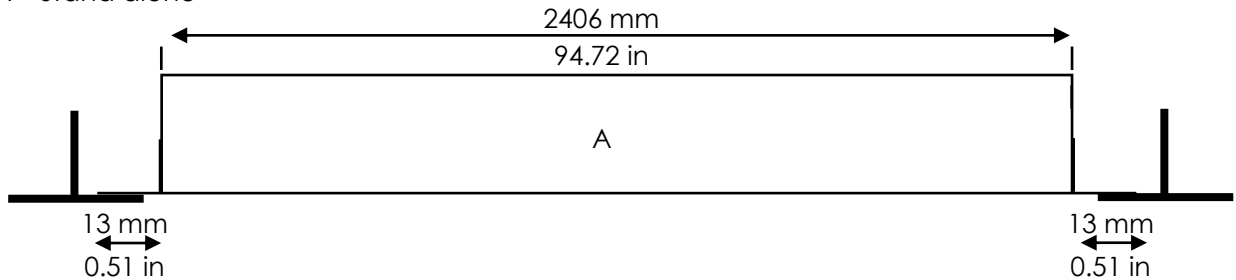



B – Starter & Ender

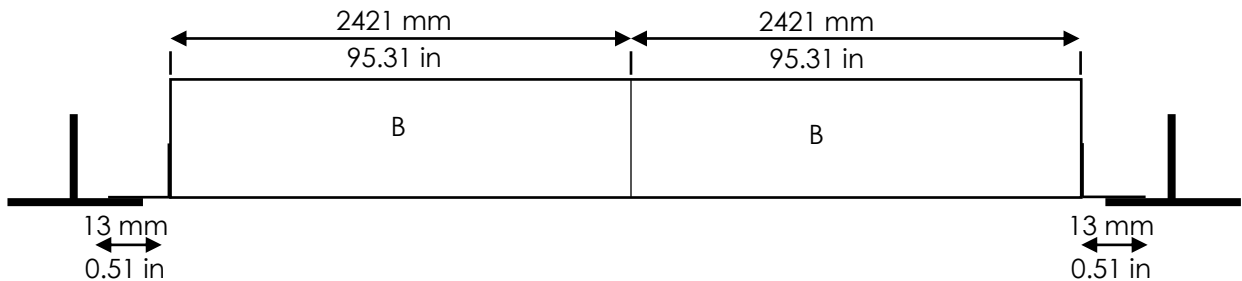

C – Middle

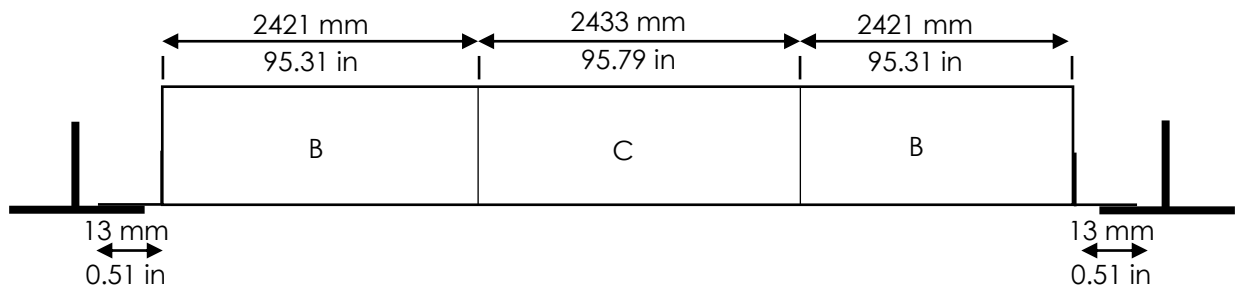

## CROSS DIMENSIONS

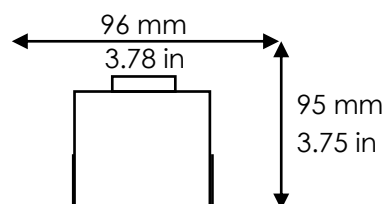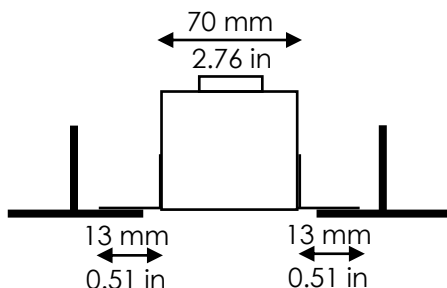

# G5 Recessed T-grid

LINEAR FIXTURES

Linear Architectural Lighting

DATE										
PROJECT NAME										
TYPE										
QTY										
ORDERING CODE	AE-SF-G5CA					010		-R-		


## PHOTOMETRIC DATA

AE-SF-  
G5CA44030/35/40010XX-GB  
(3000K)

4 FEET

40 WATTS

4000K

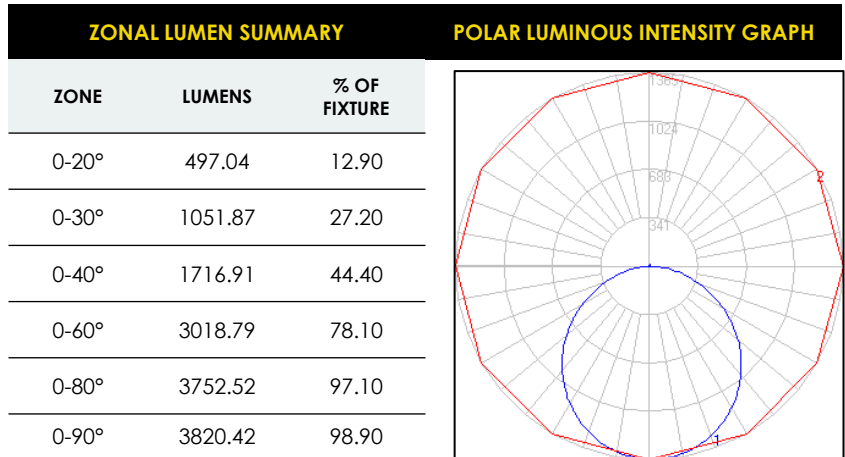


AE-SF-  
G5CA44030/35/40010XX-GB  
(4000K)

4 FEET

40 WATTS

4000K

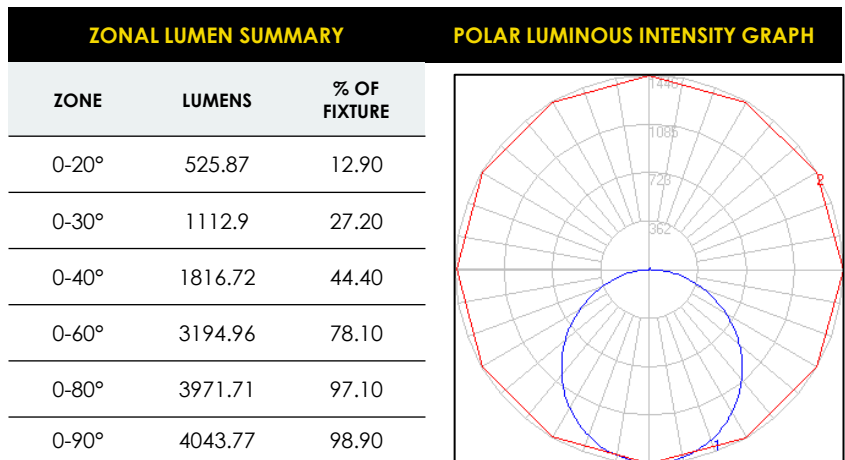

## DIMMER COMPATIBILITY LIST

0-10V Dimmer
LEGRAND RH4FBL3PTC
LUTRON DVS7V-WH
LEVITON IP710-LFZ

0-10V Dimmer
EATON WBSD-010SLD
LEVITON DS710
LUTRON MS-Z101
HUBBEL LHDIRS3N



# G5 Recessed T-grid

LINEAR FIXTURES

Linear Architectural Lighting

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-G5CA
	010
	-R-


## OVERVIEW



Easily removable fixture top



Mounting Bracket



Link



Mounting Bracket



Power Cord

## ACCESSORIES

Adjustable mounting brackets ensure safe and easy installation on T-grids.

## COLOR SELECTABLE

Use the exposed DIP switch to change between 3 CCT variations from warm to cool light.

## CONTINUOUS RUNS

Easily connect multiple fixtures together for continuous mounting configuration.

## FINISHES

Standard ERALUX anti-glare white and black finishes reduce object glare and provide an elegant look to the fixture's housing.