

G6 | SPS



LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture

The G6 series is a revolutionary compact product features slim profile with the ability to adjust lumen output. Whether its pendant mount or wall mount; Our linear supports continuous runs, creating a unified lighting design that enhances the aesthetic of any environment. Custom designs are achievable; X-T-L shapes , in addition to wall wash optic. Applications: Art Galleries | Office | Retail Stores | Hospitality | Education

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				


DYNAMIC MENU

Order Information	Page 2
Dimensions	Page 7
Accessories	Page 11
Photometric Data	Page 15

[Install Instruction link](#)

SPECIFICATIONS

Input Voltage	120-277/347V			
Power Factor	>0.9			
Total Harmonic Distortion	<20%			
Dimming Page 7	0-10V dimming			
CRI	90 CRI			
CCT	30K	35K	40K	50K
Efficacy	~75-91 LPW		Up to 1100 lm/ft	
Length (ft)	2 3	4	6	8
Power (W)	30	50	60	80
Ambient Temperature Range	-10°C to 40°C			
Mounting Options	Suspended		Wall mount	
Fixture Finish	Black White Silver 			
Custom Design	Continuous runs L shape (inner/outer corner)			
Optics	Polycarbonate lens Wall Wash			
Distribution				

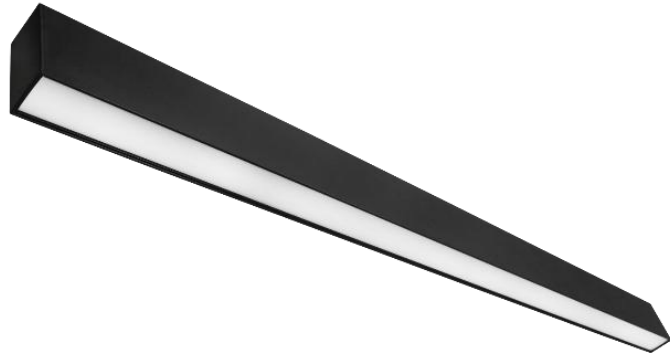

PRODUCT FEATURES



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture



ORDERING GUIDE – SUSPENDED | DIRECT LIGHT ONLY

AE-SF-G6-A-CA-		-B-P	30-35-40	-010	
AE-SF-G6-A-CA- ERALUX G6 Linear Architectural Fixture 120-277/347V input voltage	2 20 2ft 20W up to 1740lm 4 40¹ 4ft 40W up to 3480lm 6 50 6ft 50W up to 4350lm 8 70 8ft 70W up to 6090lm C Continuous length increment of 2ft ² (Select or type the length then click on 'C')	-B-P 90 CRI	30-35-40³ 3000/3500/4000K selectable	-010 0-10V external dimming down to 10%	-PL Full length polycarbonate -WW⁴ Wall Wash

Fixture Family	Length Power	CRI	CCT	Dimming	Diffuser
-WH White -BK Black -SV Silver	[BLANK] No option -LDE1⁵ Fade-to-Black down to 1% -1DIM⁶ 1% Dimming	-PU -PU18 -PH -PH18	[BLANK] No Canopy -C	[BLANK] Standard 6 FT suspension cables -W18	

Finish	Option	Power Cord	Canopy	Aircraft Cable
--------	--------	------------	--------	----------------

REFER BELOW FOR DETAILED DESCRIPTION FOR SUSPENSIONS KIT

-PU	8ft power cord 120-277V 8ft aircraft cable ⁷	-PU18-W18	18ft power cord 120-277V 18ft aircraft cable
-PU-C	8ft power cord 120-277V 8ft aircraft cable ⁷ 2 pieces of 5-inch canopies	-PU18-C-W18	18ft power cord 120-277V 18ft aircraft cable 2 pieces of 5-inch canopies
-PH	8ft power cord 120-347V 8ft aircraft cable ⁷	-PH18-W18	18ft power cord 120-347V 18ft aircraft cable
-PH-C	8ft power cord 120-347V 8ft aircraft cable ⁷ 2 pieces of 5-inch canopies	-PH18-C-W18	18ft power cord 120-347V 18ft aircraft cable 2 pieces of 5-inch canopies

NOTES	1. Only 2', 4', 6' and 8' for the suspended linear.
	2. For increment of 1ft, contact factory.
	3. Default CCT setting is 3500K but can be changed upon request before shipping.
	4. Wall wash diffuser comes in single CCT, specify the CCT when ordering.
	5. LDE1 is a Lutron Hi-lume EcoSystem driver with Soft-on. It requires color selection if not the default CCT, 3500K.
	6. 1DIM available only in 120-277V, only for 4, 6, 8 ft.
CAUTION	• If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.
	• Maximum of 300W per electrical drop.

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture



ORDERING GUIDE – SUSPENDED | DIRECT/INDIRECT, INDIRECT ONLY LIGHT

AE-SF-SPS-A-CA		-B-P		-010	
AE-SF-SPS-A-CA ERALUX SPS Linear Architectural Fixture 120-347V Input Voltage	-2 30 2ft 20/30W up to 2460lm -3 30 3ft 20/30W up to 2460lm -4 50 4ft 30/40/50W up to 4100lm -6 80 6ft 50/60/80W up to 6560lm -8 100 8ft 60/80/100W up to 8200lm C Continuous length increment of 1ft (Select or type the length then click on 'C')	-B-P 90 CRI	30-35-40¹ 3000/3500/4000K selectable 30-40-50 3000/4000/5000K selectable	-010 0-10V External Dimming down to 10%	-PL Full Length Polycarbonate -WW² Wall Wash

Fixture Family	Length Power	CRI	CCT	Dimming	Diffuser
-WH White	[BLANK] 70% direct 30% indirect	[BLANK] No option	-PU	[BLANK] No Canopy	[BLANK] Standard 8 ft Suspension Cables
-BK Black	-60U40D³ 40% direct 60% indirect	-EMBB⁴ Emergency Battery Backup	-PU18	-C	-W18
-SV Silver	-50U50D³ 50% direct 50% indirect -100U³ 0% direct 100% indirect	-1DIM⁵ 1% Dimming	-PH -PH18		
Finish	Distribution	Option	Power Cord	Canopy	Aircraft Cable

REFER BELOW FOR DETAILED DESCRIPTION FOR SUSPENSIONS KIT

-PU	8ft power cord 120-277V 8ft aircraft cable ⁶	-PU18-W18	18ft power cord 120-277V 18ft aircraft cable
-PU-C	8ft power cord 120-277V 8ft aircraft cable ⁶ 2 pieces of 5-inch canopies	-PU18-C-W18	18ft power cord 120-277V 18ft aircraft cable 2 pieces of 5-inch canopies
-PH	8ft power cord 120-347V 8ft aircraft cable ⁶	-PH18-W18	18ft power cord 120-347V 18ft suspension wires
-PH-C	8ft power cord 120-347V 8ft aircraft cable ⁶ 2 pieces of 5-inch canopies	-PH18-C-W18	18ft power cord 120-347V 18ft aircraft cable 2 pieces of 5-inch canopies

NOTES

- Default CCT setting is 3500K, but can be changed upon request before shipping.
- Wall wash diffuser comes in single CCT. Specify the CCT when ordering.
- 50, 60 & 100% up light are not CCT switchable. 100% up light only available for 4ft and 8ft in black and white. Not compatible with 5000K.
- EMBB option available in 120-277V only.
- 1DIM available in 120-277V only, for 4, 6, 8 ft.
- 8ft aircraft cable must be ordered separately. [page 7](#)

CAUTION

- If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.
- Maximum of 300W per electrical drop.

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture



ORDERING GUIDE – WALL MOUNT | DIRECT

AE-SF-G6-A-CA		-B-P	30-35-40	-010
AE-SF-G6-A-CA ERALUX G6 Linear Architectural Fixture 120-277/347V Input Voltage	2 20 2ft 20W up to 1740 lm 4 40 4ft 40W up to 3480 lm 6 50 6ft 50W up to 4350 lm 8 70 8ft 70W up to 6090 lm C Continuous length increment of 2ft ¹ (Select or type the length then click on 'C')	-B-P 90 CRI	30-35-40² 3000/3500/4000K Selectable	-010 0-10V Dimming down to 10%

Fixture Family	Length Power	CRI	CCT	Dimming
	-WM			
-PL Full length polycarbonate -WW³ Wall Wash	-WM Wall mounted	-WH White -BK Black -SV Silver	[BLANK] No option -LDE1⁴ Fade-to-Black down to 1% -1DIM⁵ 1% Dimming	
Diffuser	Mounting	Finish	Option	

NOTES

- For increment of 1ft, contact factory
- Default CCT setting is 3500K but can be changed upon request before shipping.
- Wall wash diffuser comes in single CCT, specify the CCT when ordering.
- LDE1 is a Lutron Hi-lume EcoSystem driver with Soft-on, it requires color selection if not the default CCT, 3500K.
- 1DIM available only in 120-277V, it works for 4,6,8 FT

L-shape are available, contact factory for more information

CAUTION:

- If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.
- Maximum of 300W per electrical drop.

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture



ORDERING GUIDE – WALL MOUNT | DIRECT/INDIRECT, INDIRECT ONLY

AE-SF-SPS-A-CA		-B-P		-010
AE-SF-SPS-A-CA ERALUX SPS Linear Architectural Fixture 120-277/347V Input Voltage	-2 30 2ft 20/30W up to 2460lm -3 30 3ft 20/30W up to 2460lm -4 50 4ft 30/40/50W up to 4100lm -6 80 6ft 50/60/80W up to 6560lm -8 100 8ft 60/80/100W up to 8200lm C Continuous length increment of 1ft (Select or type the length then click on 'C')	-B-P 90 CRI	30-35-40¹ 3000/3500/4000K selectable 30-40-50 3000/4000/5000K selectable	-010 0-10V External Dimming Down to 10%

Fixture Family	Length Power	CRI	CCT	Dimming
-PL Full Length Polycarbonate -WW² Wall Wash	-WM Wall Mounted	-WH White -BK Black -SV Silver	[BLANK] 30% direct 70% indirect -60U40D³ 40% direct 60% indirect -50U50D³ 50% direct 50% indirect -100U³ 0% direct 100% indirect	[BLANK] No Option -EMBB⁴ Emergency Battery Backup -1DIM⁵ 1% Dimming
Diffuser	Mounting	Finish	Distribution	Option

NOTES

1. Default CCT setting is 3500K but can be changed upon request before shipping.
2. Wall wash diffuser comes in single CCT, specify the CCT when ordering.
3. 50%, 60% & 100% up light are not CCT switchable
4. EMBB option available in 120-277V only.
5. 1DIM available only in 120-277V, it works for 4,6,8 FT
6. L-shape are available, contact factory for more information

CAUTION:

- If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.
- Maximum of 300W per electrical drop.

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture



ORDERING GUIDE – CUSTOM DESIGN

AE-SF-G6-				-30-35-40	-010	
AE-SF-G6- ERALUX G6 Linear Architectural Fixture	Specify dimension of S1 (Select or type the length)	- Specify dimension of S2 (Select or type the length)	-R Rectangular shape -L L-shape -T T-shape -X X-shape	30-35-40¹ 3000/3500/4000K selectable	-010 0-10V	-WH White -BK Black -SV Silver

Fixture Family	Side 1	Side 2	Design	CCT	Dimming	Finish
----------------	--------	--------	--------	-----	---------	--------

Rectangle	X - Shape	L - Shape	T - Shape
For square, S1 equal to S2. S1 & S2 ≥ 2FT	Symmetrical sides	For equal sides, S1 equal to S2.	Symmetrical side

NOTES	<ul style="list-style-type: none"> • Only available with polycarbonate lens • For more complex designs, contact factory • The precise dimensions will be provided by factory upon request or refer to the dimensions on page 4.
--------------	--



ORDERING GUIDE – TRIAC Dimming

		-B-P		-TRI-PL	
AE-SF-G6-A-CA- ERALUX G6 Linear Architectural Fixture	2 15 2ft 20W 3,150lm	-B-P 90 CRI	30 3000K	-TRI-PL TRIAC Dimming Full length polycarbonate lens	-WH White
AE-SF-SPS-A-CA- ERALUX SPS Linear Architectural Fixture	4 40 4ft 40W 5,250lm		35 3500K		-BK Black
	8 80 6ft 80W 10,500lm		40 4000K		

Fixture Family	Length Power	CRI	CCT	Dimming Lens	Finish
----------------	----------------	-----	-----	----------------	--------

CAUTION	<ul style="list-style-type: none"> • If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously. • Maximum of 300W per electrical drop.
----------------	---

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct

DIMMER COMPATIBILITY LIST


0-10V Dimming

BRAND	MODEL	BRAND	MODEL
LEVITON	IP710-LFZ	LEGRAND	RH4FBL3PTC
	DS710	EATON	WBSD-010SLD
LUTRON	DVS7V-WH	HUBBLE	LHDIRS3N
	MS-Z101		


DIMENSIONS – SUSPENDED CUSTOM SHAPES

SHAPES


L-SHAPE
AE-SF-G6-1-1-L



T-SHAPE
AE-SF-G6-1-1-T



X-SHAPE
AE-SF-G6-1-1-X

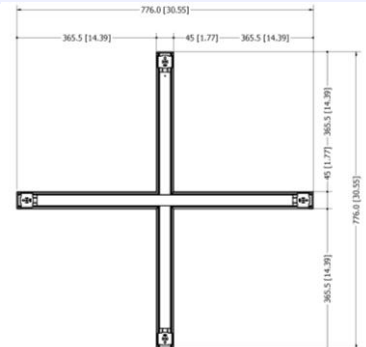

LUMEN OUTPUT – SUSPENDED | DIRECT

LENGTH	EFFICACY	OUTPUT POWER	
2FT	Avg 87-90 LPW 890 lm/ft	15/20W switchable	15W 1305 lm
			20W 1740 lm
4FT		30/40W switchable	30W 2610 lm
			40W 3480 lm
6FT		35/50/60W switchable	35W 3045 lm
			50W 4350 lm
8FT		60/80W switchable	60W 5220 lm
			80W 6090 lm

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture

LUMEN OUTPUT – SUSPENDED | DIRECT/INDIRECT

LENGTH	Efficacy	Power	100% Indirect	70% Direct 30% Indirect
2FT & 3FT	Avg 100-110 LPW	20/30 watts switchable	20W only 2200 lm	14W 1540 lm down, 6W 660 lm up
				21W 2310 lm down, 9W 990 lm up
4FT		30/40/50 watts switchable	40W only 4400 lm	21W 2310 lm down, 9W 990 lm up
				28W 3080 lm down, 12W 1320 lm up
				35W 3850 lm down, 15W 1650 lm up
6FT		50/60/70 watts switchable	50W 5500 lm	35W 3850 lm down, 15W 1650 lm up
				42W 4620 lm down, 18W 1980 lm up
8FT		60/80/100 watts switchable	60W 6600 lm	49W 5390 lm down, 21W 2310 lm up
				42W 4620 lm down, 18W 1980 lm up
			80W 8800 lm	56W 6160 lm down, 24W 2640 lm up
	70W 7700 lm down, 30W 3300 lm up			

LENGTH	40% Direct 60% Indirect	50% Direct 50% Indirect
2FT & 3FT	8W 880 lm down, 12W 1320 lm up	10W 1100 lm up & down
	12W 1320 lm down, 18W 1980 lm up	15W 1650 lm up & down
4FT	12W 1320 lm down, 18W 1980 lm up	15W 1650 lm up & down
	16W 1760 lm down, 24W 2640 lm up	20W 2200 lm up & down
	20W 2200 lm down, 30W 3300 lm up	25W 2750 lm up & down
6FT	20W 2200 lm down, 30W 3300 lm up	25W 2750 lm up & down
	24W 2640 lm down, 36W 3960 lm up	30W 3300 lm up & down
8FT	28W 3080 lm down, 42W 4620 lm up	35W 3850 lm up & down
	24W 2640 lm down, 36W 3960 lm up	30W 3300 lm up & down
	32W 3520 lm down, 48W 5280 lm up	40W 4400 lm up & down
	40W 4400 lm down, 60W 6600 lm up	50W 5500 lm up & down

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture

DIMENSIONS

SIZE	TOP/BOTTOM VIEW	SIDE VIEW
2FT	 	
3FT	 	
6FT	 	

NOTES • 3ft not available for suspended direct and wall mount direct

LINEAR LED LIGHT

Architecture Linear | 1.5" Aperture


DRILLING PATTERN – SUSPENDED (DIRECT/INDIRECT)

SIZE




STAND ALONE INSTALLATION


2FT




4FT

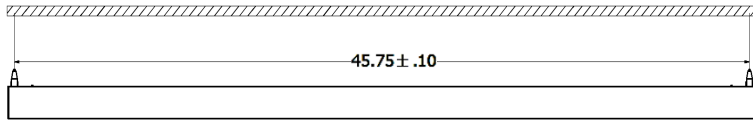

6FT

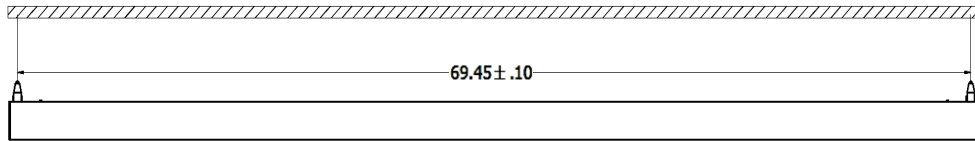

8FT

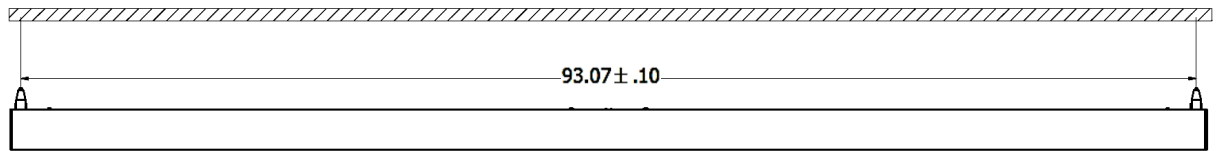


SIZE




CONTINUOUS RUN INSTALLATION


2FT

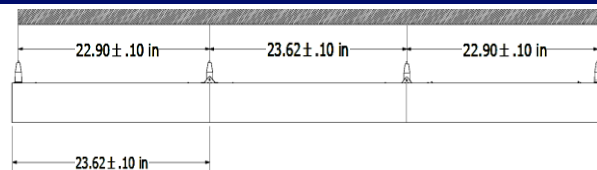


4FT

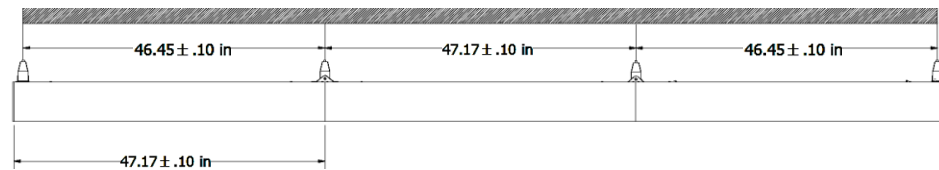

6FT

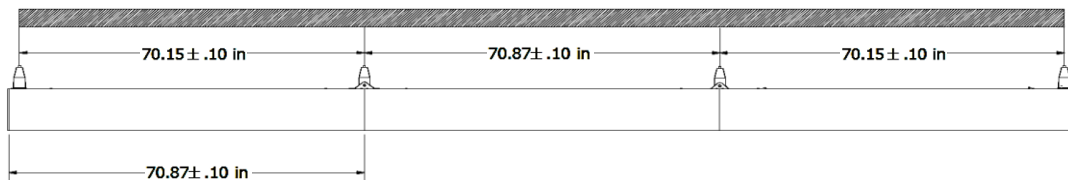

8FT

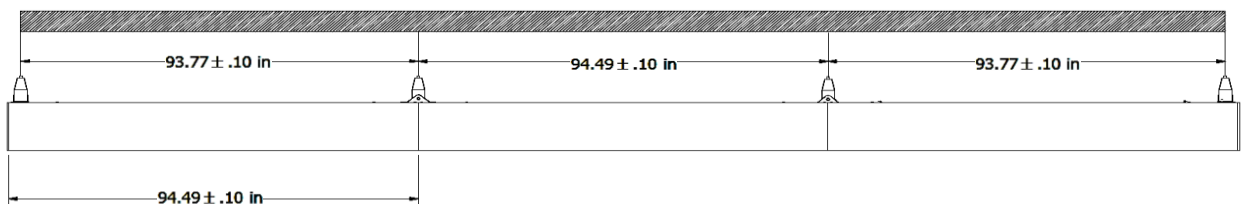

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture


DRILLING PATTERN – WALL MOUNT (DIRECT/INDIRECT)

SIZE




STAND ALONE INSTALLATION


2FT




4FT

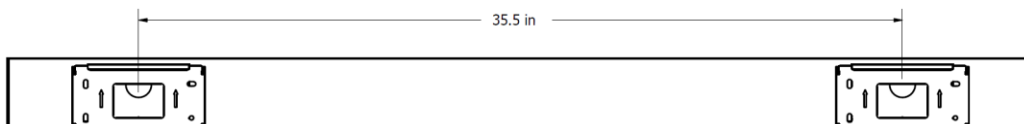

6FT

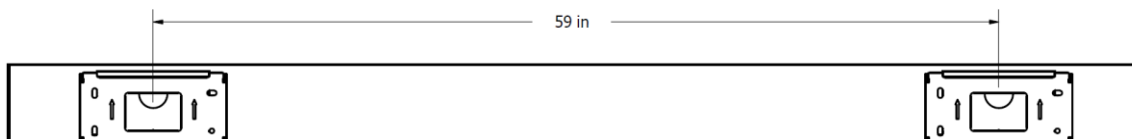

8FT

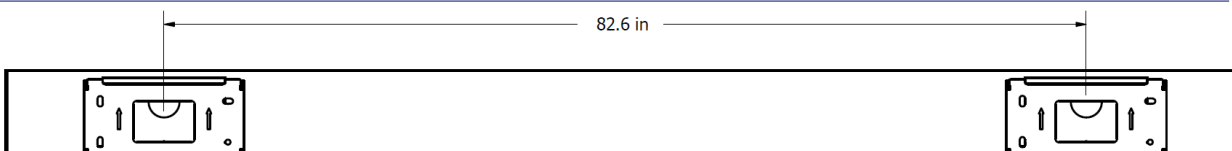

ACCESSORIES

MOUNTING

Wall mount

Description


Pictures

AE-SF-WMB-WH

White wall mount kit used for linear fixtures installation on walls

AE-SF-WMB-BK

Black wall mount kit used for linear fixtures installation on walls




LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture

ACCESSORIES – WALL MOUNT | DIRECT/INDIRECT

For Continuous Run

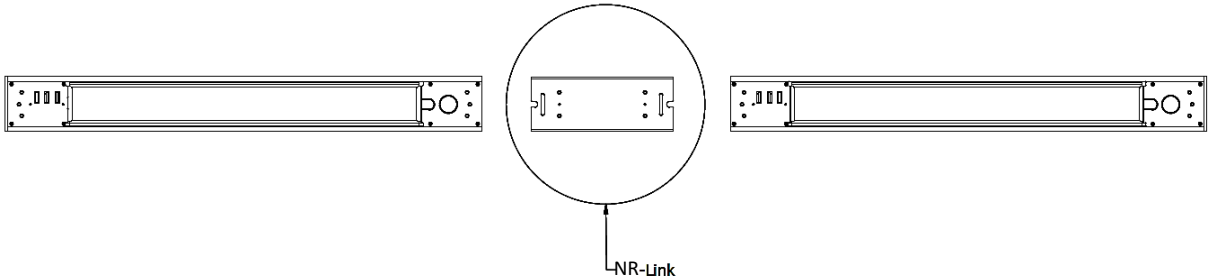

NR-LINK

ORDER CODE

DESCRIPTION

AE-SF-LINK-NR

Seamless mechanical connection for continuous runs
Preventing Light Leakage
Easy installation

DIFFUSER OPTIONS

Wall Wash Lens

Description

Pictures

The wall washing is a feature where the luminaire is typically positioned at least 12" from the wall to enhance the smoothness of a wall by eliminating shadows or to highlight a wall to create visual interest. The wall wash lens is available for all continuous sizes; 4FT and 8FT.



LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture

ACCESSORIES – SUSPENDED (DIRECT/INDIRECT)

Ordered separately if needed

POWER CORD

ORDER CODE	DESCRIPTION	PICTURE
AE-SF-PWRCORD-WH AE-SF-PWRCORD-BK	8' white / black power cord with 120-277V input voltage	
AE-SF-PWRCORD-WH-18FT AE-SF-PWRCORD-BK-18FT	18' white / black power cord with 120-277V input voltage	
AE-SF-PWRCORD-HV-WH AE-SF-PWRCORD-HV-BK	8' white / black power cord with 120-347V input voltage	
AE-SF-PWRCORD-HV-WH-18FT AE-SF-PWRCORD-HV-BK-18FT	18' white / black power cord with 120-347V input voltage	

CANOPY

ORDER CODE	DESCRIPTION	PICTURE
AE-SF-CANOPY-WH-ELITE AE-SF-CANOPY-BK-ELITE	2 pieces per set white / black 5" canopy 0.3" thickness One for power cord/aircraft cable and one for aircraft cable	

AIRCRAFT CABLE

ORDER CODE	DESCRIPTION	PICTURE
AE-SF-G6/SPS-WIRE-8FT	8ft aircraft cable 2 pieces per set 1 set / fixture	
AE-SF-G6/SPS-WIRE-18FT	18ft aircraft cable 2 pieces per set 1 set / fixture	

LINEAR LED LIGHT

Architecture Linear | 1.5" Aperture

CONTROLS


Ordered separately, field installed

EMERGENCY LED DRIVER (BLD-HMXXD-YYY)

BLD-HM8D-YYY



The BLD-HMXXD-YYY series LED Emergency Driver is UL listed for field and factory installations. It switches to emergency mode during power failures, providing up to 90 minutes of lighting. With an integrated battery, charger, and converter, it delivers 6-25W constant power at 170VDC. Ideal for 0-10V dimmable indoor commercial LED fixtures, such as flat panels, troffers, downlights, and linear strip lights.

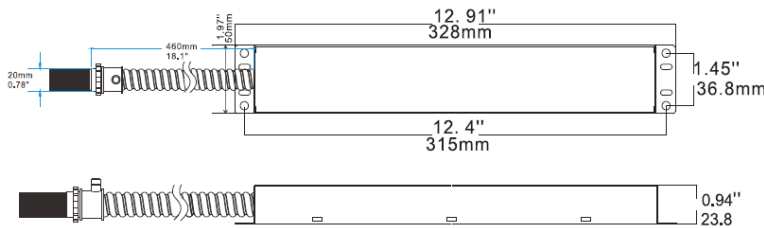


SPECIFICATIONS	
Input Voltage	100-347 Vac
Power Frequency	50/60HZ
Input Power	8W max
Output Voltage	170V Dc
Output Power	8W
Ambient Temperature	0°C to 50°C
	30°F to 122°F
Installation	Remote

ROOM OCCUPANCY SENSOR

Ordered separately, field installed

PART NUMBER	DESCRIPTION
AE-CT-DT806	Detecta - Room Occupancy Sensor
RC102	RC102 Remote Control

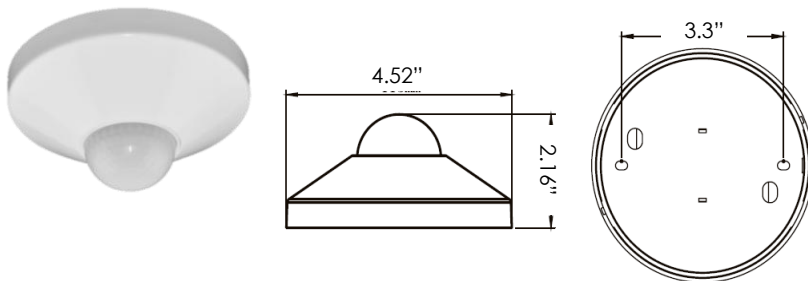

SPECIFICATIONS	
Input Voltage	120-277 Vac
Power Frequency	50/60HZ
Rated Load	At 120 Vac 800W
	At 277 Vac 1200W
Detection Range	3-10 Meters
	9.8- 32.8 Feet
Standby Power	~0.9W
Time Setting	10 sec to 30 min
Light Control	10-2,000LUX
Installation	Ceiling Mounted

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture

LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. Use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS

CCT	3000K	3500K	4000K	5000K
PREMIUM (90CRI)	0.94	0.97	1	1.03

PHOTOMETRIC DATA - DIRECT

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION		
AE-SF-G6-A-CA-440		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width	
Wattage	40W	0-20°	529.17	14.70		2.5ft	236 fc	6.2 ft 5.3 ft
CCT	3000K	0-30°	1098.74	30.50		5.0ft	58.9 fc	12.4 ft 10.5 ft
Distribution	95°	0-40°	1749.95	48.60		7.5ft	26.2 fc	18.6 ft 15.8 ft
Length	4ft	0-60°	2921.83	81.20		10.0ft	14.7 fc	24.8 ft 21.0 ft
		0-80°	3490.93	97.00		12.5ft	9.43 fc	31.0 ft 26.3 ft
		0-90°	3530.26	98.10		15.0ft	6.55 fc	37.2 ft 31.6 ft
					■ Vert. Spread: 102.2° ■ Horiz. Spread: 92.9°			
AE-SF-G6-A-CA-440		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width	
Wattage	50W	0-20°	549.91	16.2		2.5ft	250 fc	5.8 ft 4.7 ft
CCT	3500K	0-30°	1130.73	33.4		5.0ft	62.4 fc	11.6 ft 9.4 ft
Distribution	95°	0-40°	1782.06	52.6		7.5ft	27.7 fc	17.3 ft 14.1 ft
Length	4ft	0-60°	2902.16	85.7		10.0ft	15.6 fc	23.1 ft 18.8 ft
		0-80°	3382.01	99.8		12.5ft	9.99 fc	28.9 ft 23.5 ft
		0-90°	3387.73	100		15.0ft	6.94 fc	34.7 ft 28.2 ft
					■ Vert. Spread: 98.3° ■ Horiz. Spread: 86.6°			
AE-SF-G6-A-CA-440		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width	
Wattage	40W	0-20°	566.92	16.20		2.5ft	257 fc	5.8 ft 4.7 ft
CCT	4000K	0-30°	1165.7	33.40		5.0ft	64.3 fc	11.6 ft 9.4 ft
Distribution	95°	0-40°	1837.18	52.60		7.5ft	28.6 fc	17.3 ft 14.1 ft
Length	4ft	0-60°	2991.91	85.70		10.0ft	16.1 fc	23.1 ft 18.8 ft
		0-80°	3486.6	99.80		12.5ft	10.3 fc	28.9 ft 23.5 ft
		0-90°	3492.5	100.00		15.0ft	7.15 fc	34.7 ft 28.2 ft
					■ Vert. Spread: 98.3° ■ Horiz. Spread: 86.6°			
AE-SF-G6-A-CA-440		Zone	Lumens	% Fixture	Direct Light	Center Beam Fc	Beam Width	
Wattage	50W	0-20°	395.54	15.7		2.5ft	176 fc	5.8 ft 3.8 ft
CCT	3500K	0-30°	819.37	32.6		5.0ft	44.1 fc	11.6 ft 7.7 ft
Distribution	95°	0-40°	1291.53	51.3		7.5ft	19.6 fc	17.4 ft 11.5 ft
Length	4ft	0-60°	2078.68	82.6		10.0ft	11 fc	23.2 ft 15.3 ft
		0-80°	2461.84	97.8		12.5ft	7.05 fc	29.0 ft 19.2 ft
		0-90°	2488.97	98.9		15.0ft	4.9 fc	34.8 ft 23.0 ft
					■ Vert. Spread: 98.4° ■ Horiz. Spread: 75.0°			

PHOTOMETRIC DATA – DIRECT/INDIRECT

PART NUMBER		ZONAL LUMEN SUMMARY		POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION				
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Direct / Indirect Light		Center Beam Fc	Beam Width	
Wattage	40W	0-20°	404.75	9.70		2.5ft	191 fc	6.6 ft	5.3 ft
CCT	3500K	0-30°	828.84	19.80		5.0ft	47.7 fc	13.1 ft	10.6 ft
Distribution	95°	0-40°	1313.54	31.40		7.5ft	21.2 fc	19.7 ft	15.9 ft
Length	4ft	0-60°	2223.66	53.20		10.0ft	11.9 fc	26.2 ft	21.2 ft
Proportion	30% up 70% down	0-80°	2728.82	65.30		12.5ft	7.63 fc	32.8 ft	26.5 ft
		0-90°	2791.1	66.80		15.0ft	5.3 fc	39.3 ft	31.8 ft
					■ Vert. Spread: 105.3° ■ Horiz. Spread: 93.3°				
PART NUMBER		ZONAL LUMEN SUMMARY		POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION				
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Indirect Light		Center Beam Fc	Beam Width	
Wattage	40W	90-110°	149.26	4.4		2.5ft	250 fc	5.8 ft	4.7 ft
CCT	3500K	90-120°	485.57	14.3		5.0ft	62.4 fc	11.6 ft	9.4 ft
Distribution	95°	90-130°	988.01	29.2		7.5ft	27.7 fc	17.3 ft	14.1 ft
Length	4ft	90-150°	2257	66.6		10.0ft	15.6 fc	23.1 ft	18.8 ft
Proportion	100% up	90-180°	3387.73	100		12.5ft	9.99 fc	28.9 ft	23.5 ft
		110-180°	3238.47	95.6		15.0ft	6.94 fc	34.7 ft	28.2 ft
					■ Vert. Spread: 98.3° ■ Horiz. Spread: 86.6°				
PART NUMBER		ZONAL LUMEN SUMMARY		POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION				
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Direct / Indirect Light		Center Beam Fc	Beam Width	
Wattage	50W	0-20°	264.83	6.5		2.5ft	120 fc	5.7 ft	4.6 ft
CCT	3500K	0-30°	543.66	13.4		5.0ft	30.1 fc	11.4 ft	9.3 ft
Distribution	95°	0-40°	855.31	21		7.5ft	13.4 fc	17.1 ft	13.9 ft
Length	4ft	0-60°	1388.72	34.1		10.0ft	7.53 fc	22.8 ft	18.6 ft
Proportion	60% up 40% down	0-80°	1615.42	39.7		12.5ft	4.82 fc	28.5 ft	23.2 ft
		0-90°	1617.97	39.7		15.0ft	3.35 fc	34.2 ft	27.9 ft
					■ Vert. Spread: 97.5° ■ Horiz. Spread: 85.8°				
PART NUMBER		ZONAL LUMEN SUMMARY		POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION				
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Direct Light		Center Beam Fc	Beam Width	
Wattage	50W	0-20°	395.54	15.7		2.5ft	176 fc	5.8 ft	3.8 ft
CCT	3500K	0-30°	819.37	32.6		5.0ft	44.1 fc	11.6 ft	7.7 ft
Distribution	95°	0-40°	1291.53	51.3		7.5ft	19.6 fc	17.4 ft	11.5 ft
Length	4ft	0-60°	2078.68	82.6		10.0ft	11 fc	23.2 ft	15.3 ft
WALL WASH LENS		0-80°	2461.84	97.8		12.5ft	7.05 fc	29.0 ft	19.2 ft
		0-90°	2488.97	98.9		15.0ft	4.9 fc	34.8 ft	23.0 ft
					■ Vert. Spread: 98.4° ■ Horiz. Spread: 75.0°				

LINEAR LED LIGHT

Architectural Linear | 1.5" Aperture

OVERVIEW



Innovative Design

- Slim extruded aluminum housing for better heat dissipation.
- Highly durable polycarbonate and high transmittance lens.



Diffusers

- Polycarbonate lens
- Wall-wash lens



Multiple Options

- Four standard length available; 2, 4, 6, & 8ft.
- Three CCT switchable and power tunable.
- Black, white & silver finishes.



Mountings Available

- Suspended – Direct/Indirect
- Wall mount – Direct/Indirect



Emergency backup battery



Features

- 1% dimming option
- Lutron Hi-lume Ecosystem driver with Soft-on



Tests And Certifications

