

HIMALIA

LED TRACK LIGHT


Pendant Snap-In Track Head | Jupiter Series

The Himalia is a spherical pendant track head compatible with the Jupiter snap-in track, available in a range of CCTs and fixture finishes. Its simple snap-in design allows for quick, straightforward installation. With its elegant design and adjustable suspension length, the Himalia is a customizable and attractive addition to any space.

Applications: Art Galleries | Show Rooms | Retail Stores | Hospitality



| | DATE | QTY | ACC. QTY | TYPE |
|--------------|------|-----|----------|------|
| PROJECT | | | | |
| PN | | | | |
| ACCESSORY PN | | | | |
| NOTES | | | | |

|  DYNAMIC MENU | |
|---|------------------------|
| Order Information | Page 2 |
| Dimensions | Page 3 |
| Photometric Data | Page 3 |

[Install Instruction Link](#)

SPECIFICATIONS

| | |
|---------------------------|--|
| Input Voltage | DC 48V |
| Power Factor | >0.9 |
| Total Harmonic Distortion | <20% |
| Dimming | 0-10V dimming available with external driver (ordered separately) |
| CRI | 80 CRI |
| CCT | <div style="display: flex; gap: 10px;"> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #fff9c4; display: flex; align-items: center; justify-content: center;">30K</div> <div style="border: 1px solid black; border-radius: 50%; width: 20px; height: 20px; background-color: #bbdefb; display: flex; align-items: center; justify-content: center;">40K</div> </div> |
| Efficacy | 94 LPW |
| Power | 4W |
| Mounting Adapter | Jupiter snap-in track |
| Fixture Finish | Black White |
| Housing Material | Die-cast aluminum |
| Distribution | 30° |



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 3 YEARS

Eralux will warrant defective drivers, LEDs and boards for 3 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L70 at 55,000 hours

Rated for 70% initial lumen output at 55,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

LED TRACK LIGHT

Pendant Snap-In Track Head | 3" Diameter



ORDERING GUIDE

| | | | | |
|--|---------------------------|---------------------------|--|--|
| JP-HI | -4W | -FL | | |
| JP-HI ERALUX Himalia Pendant Snap-In Track Head Jupiter Series | -4W 4W 375 lm | -FL Flood 30° | 30 3000K 40 4000K | -BK Black -WH White |

Fixture Family

Power

Distribution

CCT

Finish





NOTES

- The Himalia track head does not come with an integral driver. The ELG-75-48AB driver must be ordered separately. See Jupiter track spec sheets for more information.



JUPITER SNAP-IN TRACK SYSTEM


Available in 4ft or 8ft lengths.

| MODEL | DEPTH | MOUNTING | PICTURE |
|--------------------|-------|----------------------|---|
| <u>ST6</u> | 1" | Surface or Suspended |  |
| <u>ST2</u> | 2" | |  |
| <u>ST8</u> | 1" | Recessed |  |
| <u>ST18</u> | 2" | |  |

LED TRACK LIGHT

Pendant Snap-In Track Head | 3" Diameter

DIMENSIONS

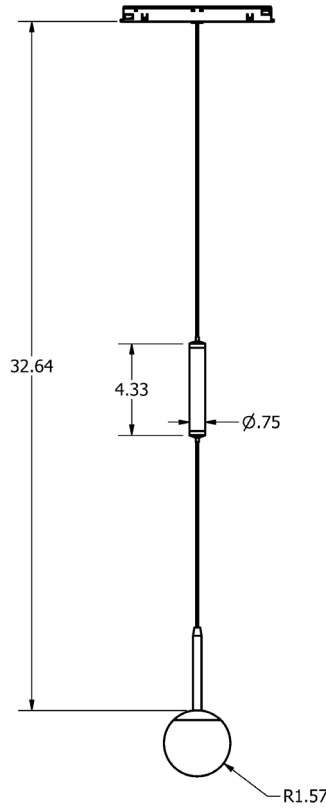

LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. Use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS

| CCT | 3000K | 4000K |
|-----------------|-------|-------|
| PREMIUM (90CRI) | 1 | 1.06 |

PHOTOMETRIC DATA

| PART NUMBER | | ZONAL LUMEN SUMMARY | | | POLAR LUMINOUS INTENSITY | CONE DISTRIBUTION | | | | | | | | | | | | | | | | | | | | | | |
|------------------|----------------|---------------------|--------|-----------|---|---|------------|--|----------------|------------|------|---------|---------------|------|---------|---------------|------|-------|---------------|-------|---------|---------------|-------|---------|---------------|-------|---------|---------------|
| JP-HI-4W-FL30-XX | | Zone | Lumens | % Fixture | Direct Light | Center Beam Fc | Beam Width | | | | | | | | | | | | | | | | | | | | | |
| Wattage | 4W | 0-20° | 138.09 | 36.8 | | <table border="1"> <thead> <tr> <th></th> <th>Center Beam Fc</th> <th>Beam Width</th> </tr> </thead> <tbody> <tr> <td>2.5R</td> <td>98.6 fc</td> <td>1.3 ft 1.3 ft</td> </tr> <tr> <td>5.0R</td> <td>24.7 fc</td> <td>2.7 ft 2.6 ft</td> </tr> <tr> <td>7.5R</td> <td>11 fc</td> <td>4.0 ft 3.9 ft</td> </tr> <tr> <td>10.0R</td> <td>6.17 fc</td> <td>5.4 ft 5.2 ft</td> </tr> <tr> <td>12.5R</td> <td>3.95 fc</td> <td>6.7 ft 6.5 ft</td> </tr> <tr> <td>15.0R</td> <td>2.74 fc</td> <td>8.0 ft 7.8 ft</td> </tr> </tbody> </table> | | | Center Beam Fc | Beam Width | 2.5R | 98.6 fc | 1.3 ft 1.3 ft | 5.0R | 24.7 fc | 2.7 ft 2.6 ft | 7.5R | 11 fc | 4.0 ft 3.9 ft | 10.0R | 6.17 fc | 5.4 ft 5.2 ft | 12.5R | 3.95 fc | 6.7 ft 6.5 ft | 15.0R | 2.74 fc | 8.0 ft 7.8 ft |
| | Center Beam Fc | Beam Width | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5R | 98.6 fc | 1.3 ft 1.3 ft | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.0R | 24.7 fc | 2.7 ft 2.6 ft | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.5R | 11 fc | 4.0 ft 3.9 ft | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10.0R | 6.17 fc | 5.4 ft 5.2 ft | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.5R | 3.95 fc | 6.7 ft 6.5 ft | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15.0R | 2.74 fc | 8.0 ft 7.8 ft | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CCT | 3000K | 0-30° | 207.28 | 55.3 | <ul style="list-style-type: none"> Vert. Spread: 30.0° Horiz. Spread: 29.3° | | | | | | | | | | | | | | | | | | | | | | | |
| Distribution | 30° | 0-40° | 254.13 | 67.8 | | | | | | | | | | | | | | | | | | | | | | | | |
| Lumens | 375 | 0-60° | 311.99 | 83.2 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 0-80° | 339.35 | 90.5 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 0-90° | 345.93 | 92.2 | | | | | | | | | | | | | | | | | | | | | | | | |