


JUPITER TRACK ST2

eralux®

TRACK SYSTEM AND ACCESSORIES

The JUPITER ST2 track is a two-circuit snap-in track system that can be surface mounted or suspended. This 2" low-voltage track is compatible with the JUPITER track head series, comprised of a variety of cylindrical, pendant and linear track lights. The modules are easily mounted using snap-in adapters. The track and power distribution are suitable for retail, commercial, and residential use.

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				

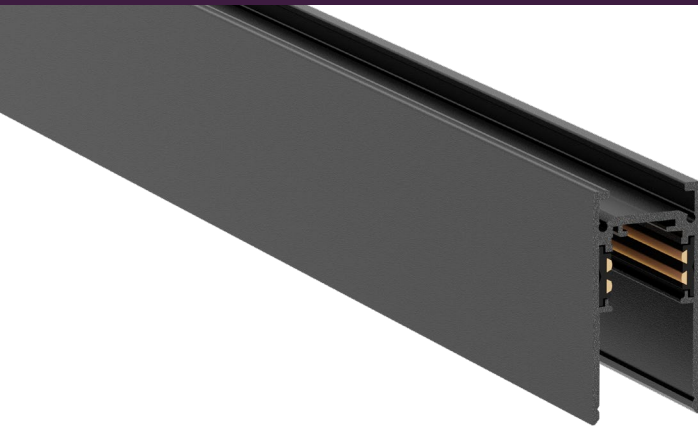

PRODUCT CERTIFICATIONS




SYSTEM WARRANTY – 3 YEARS

Eralux will warrant defective drivers, LEDs and boards for 3 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

ORDERING GUIDE

9500			-ST2-E
9500 ERALUX Jupiter Snap-In Track	-UL4 4ft track -UL8 8ft track	/B Black Finish /W2 White Finish	-ST2-E 2-Inch Depth
Track System	Length	Finish	Depth

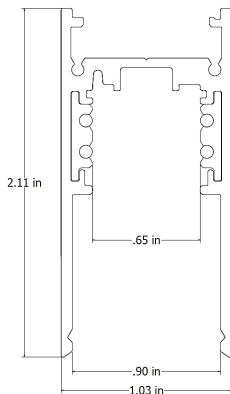

PART NO.	LENGTH
9500-UL4	4ft (1219.2mm)
9500-UL8	8ft (2438.4mm)

ACCESSORIES

ORDERING CODE		DESCRIPTION	PICTURE
JP10001	-WHT	I Connector	
	-BLK		
JS20002 JS20002R (Reverse)	-WHT	T Connector	
	-BLK		
JS20003	-WHT	L Connector	
	-BLK		
JS20004	-WHT	X Connector	
	-BLK		
JP10015 JP10015R (Reverse)	-WHT	End Feed	
	-BLK		
JS20009	-WHT	End Cap	
	-BLK		
JS20009H	-WHT	End Cap with Hole	
	-BLK		
JP20027	-WHT	8ft Aesthetic Track Cover	
	-BLK		

NOTES


- All connectors come with housing. See pages 4-5 for more details.
- See page 6 for an example track configuration.

TRACK SYSTEM AND ACCESSORIES

Snap-In Track | 2" Surface Mounted or Suspended

CLAMP FOR CEILING MOUNT

ORDERING CODE	
S-9500/114	-B
	-W2

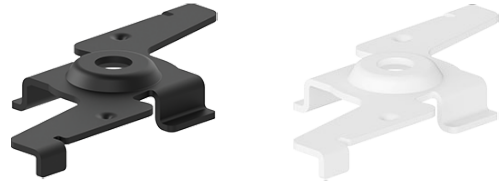

- Black or white finish
- Painted steel clamp

SUSPENSION KIT

ORDERING CODE
9500-KIT1-5

- Silver finish only
- Round head ceiling attachment
- Steel cable (0.059in diameter and 196.85in length) with spherical end
- Bracket with automatic gripper



NOTES



- 2 clamps/suspension kits for 4ft of track.
- 3 clamps/suspension kits for 8ft of track.
- See install instructions for more information.

EXTERNAL DRIVER

ORDERING CODE
ELG-75-48AB

- 48V output low-voltage driver
- Necessary for Jupiter snap-in track heads

SPECIFICATIONS	
Input Voltage	100-240/277V
Output Voltage	43.2-52.8V
Output Power	60W max
Dimming	0-10V
Current	1.6A
Ambient Temperature	-40°C to 60°C
	-40°F to 140°F
IP Rating	IP65

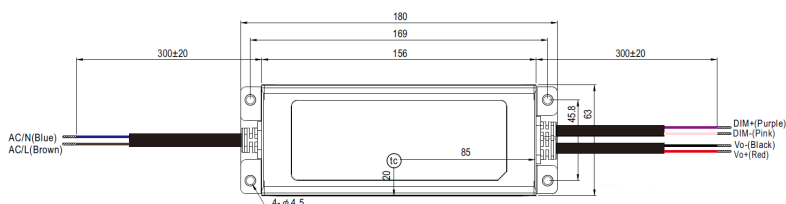

JUPITER TRACK ST2


TRACK SYSTEM AND ACCESSORIES

Snap-In Track | 2" Surface Mounted or Suspended

END FEED



DIMENSIONS (in mm)

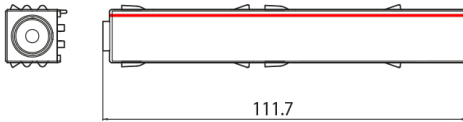


POLARIZATION	ORDERING CODE	BOM
Standard (Right)	JP10015-WHT	9501-S-KR/W-E
	JP10015-BLK	9501-S-KR/B-E
Reverse (Left)	JP10015R-WHT	9501-S-KL/W-E
	JP10015R-BLK	9501-S-KL/B-E

I CONNECTOR




DIMENSIONS (in mm)




ORDERING CODE	BOM
JP10001-WHT	9503-S-K/W-E S-9500/423-LA
JP10001-BLK	9503-S-K/B-E S-9500/423-LA

L CONNECTOR

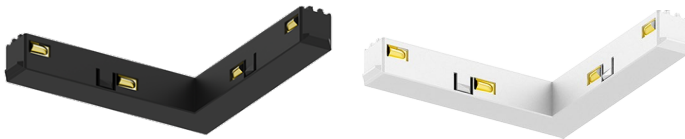

DIMENSIONS (in mm)

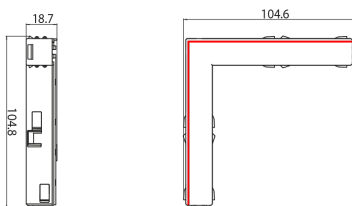

ORDERING CODE	BOM
JS20003-WHT	9511-KE/W-E S-9511/W2-P-ST2
JS20003-BLK	9511-KE/B-E S-9511/B-P-ST2


TRACK SYSTEM AND ACCESSORIES

Snap-In Track | 2" Surface Mounted or Suspended

T CONNECTOR




DIMENSIONS (mm)

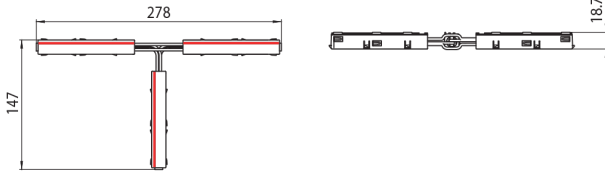


POLARIZATION	ORDERING CODE	BOM
Standard (Right)	JS20002-WHT	9514-K/W-E S-9513/W2-P-ST2
	JS20002-BLK	9514-K/B-E S-9513/B-P-ST2
Reverse (Left)	JS20002R-WHT	9513-K/W-E S-9513/W2-P-ST2
	JS20002R-BLK	9513-K/B-E S-9513/B-P-ST2

X CONNECTOR

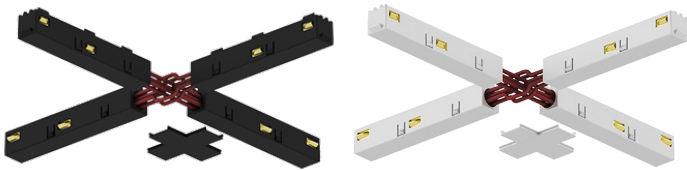

DIMENSIONS (mm)

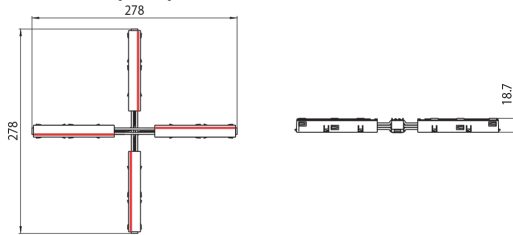

ORDERING CODE	BOM
JS20004-WHT	9517-K/W-E S-9517/W2-P-ST2
JS20004-BLK	9517-K/B-E S-9517/B-P-ST2

END CAPS AND TRACK COVER



JS20009



JS20009H




JP20027

ORDERING CODE	BOM
JS20009-WHT	9504/ST2-P-W2
JS20009-BLK	9504/ST2-P-B
JS20009H-WHT	9504/ST2-P-W2-F
JS20009H-BLK	9504/ST2-P-B-F
JP20027-WHT	S-9500-LE/W2-UL8
JP20027-BLK	S-9500-LE/B-UL8

TRACK SYSTEM AND ACCESSORIES

Snap-In Track | 2" Surface Mounted or Suspended

TRACK CONFIGURATION

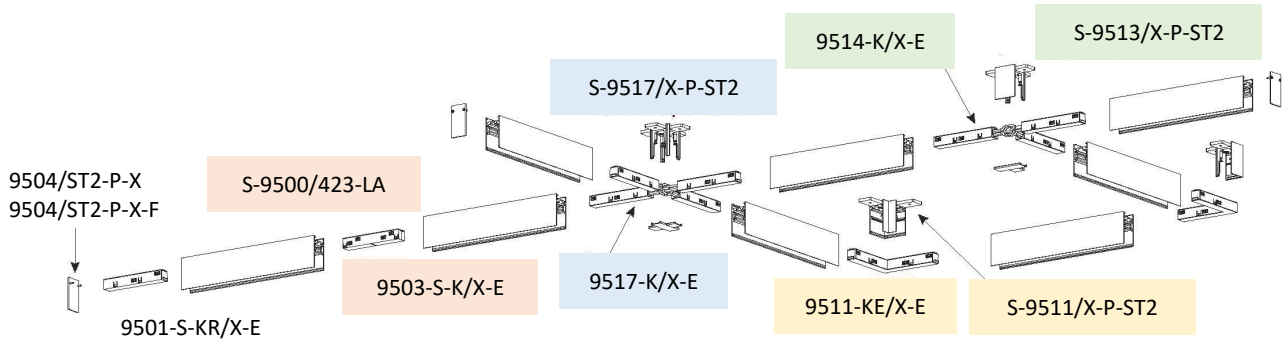

JUPITER TRACK – ALL MODELS

MODEL	DEPTH	MOUNTING	PICTURE
<u>ST6</u>	1"	Surface or Suspended	
<u>ST2</u>	2"		
<u>ST8</u>	1"	Recessed	
<u>ST18</u>	2"		