

## LED COMMERCIAL DOWNLIGHT

### Surface Mount Disk | 4" & 6" Round

The OVA Series is round semi oval shape surface mounted downlight disk. Its selectable CCT switch lets you adjust the color temperature from 2700K to 5000K. Available in 4" & 6" aperture sizes with 10W & 15W respectively and an output of 82lm/W, providing a versatile lighting option for any space, in addition to the surface mount it can be retrofit installed into can with the suitable accessories.

Applications: Office | Retail stores | Hotels | Restaurants | Home interior | Library Etc.



#### DYNAMIC MENU

Order Information	<a href="#">Page 2</a>
Dimensions	<a href="#">Page 3</a>
Accessories	<a href="#">Page 4</a>
Photometric Data	<a href="#">Page 6</a>

[Install Instruction link](#)

#### SPECIFICATIONS

Input Voltage	120V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming <a href="#">Page 6</a>	TRIAC
CRI	90 CRI
CCT	<div>27K</div> <div>30K</div> <div>35K</div> <div>40K</div> <div>50K</div>
Efficacy	~ 82 LPW
Size	4" 6"
Power	10W 15W
Ambient Temperature Range	-20°C to 40°C
Mounting	Surface mount Recessed retrofit into can
Finish	White
Material	Iron housing

Distribution



DATE	QTY	ACC. QTY	TYPE

PROJECT

PN

ACCESSORY PN

NOTES



#### PRODUCT FEATURES



#### PRODUCT CERTIFICATIONS



#### SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

#### LUMEN MAINTENANCE – L70 at 50,000 hours

Rated for 70% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

LED COMMERCIAL DOWNLIGHT  
Surface Mount Disk | 4" & 6" Round



ORDERING GUIDE

DL-OV		-5CCT	-R90	-WH
DL-OV	-4-10W	-5CCT	-R90	-WH
ERALUX OVA Series Surface Mount Disc Downlight	4" 10W   900 lm	CCT Switchable 27/30/35/40/50K	90CRI	White
	-6-15W			
	6" 15W   1350 lm			

Fixture Family	Size   Power	CCT	CRI	Finish
----------------	--------------	-----	-----	--------




ORDERING GUIDE - ACCESSORIES

DL-OV	-4	-ACC-CAN-KIT
ERALUX OVA Series Surface Mount Disc Downlight	4"	Accessory for Recessed retrofit into can
	-6	
	6"	

Fixture Family	Size	Accessory
----------------	------	-----------

Model Number	Input Voltage	Power	Beam Angle	CCT	Lumens
AE-DL-OV-4-10W-5CCT-R90-WH	120V	10W	110	2700K	820lm
				3000K	830lm
				3500K	900lm
				4000K	850lm
				5000K	830lm
AE-DL-OV-6-15W-5CCT-R90-WH	120V	15W	110	2700K	1230lm
				3000K	1250lm
				3500K	1350lm
				4000K	1300lm
				5000K	1250lm

DIMENSIONS

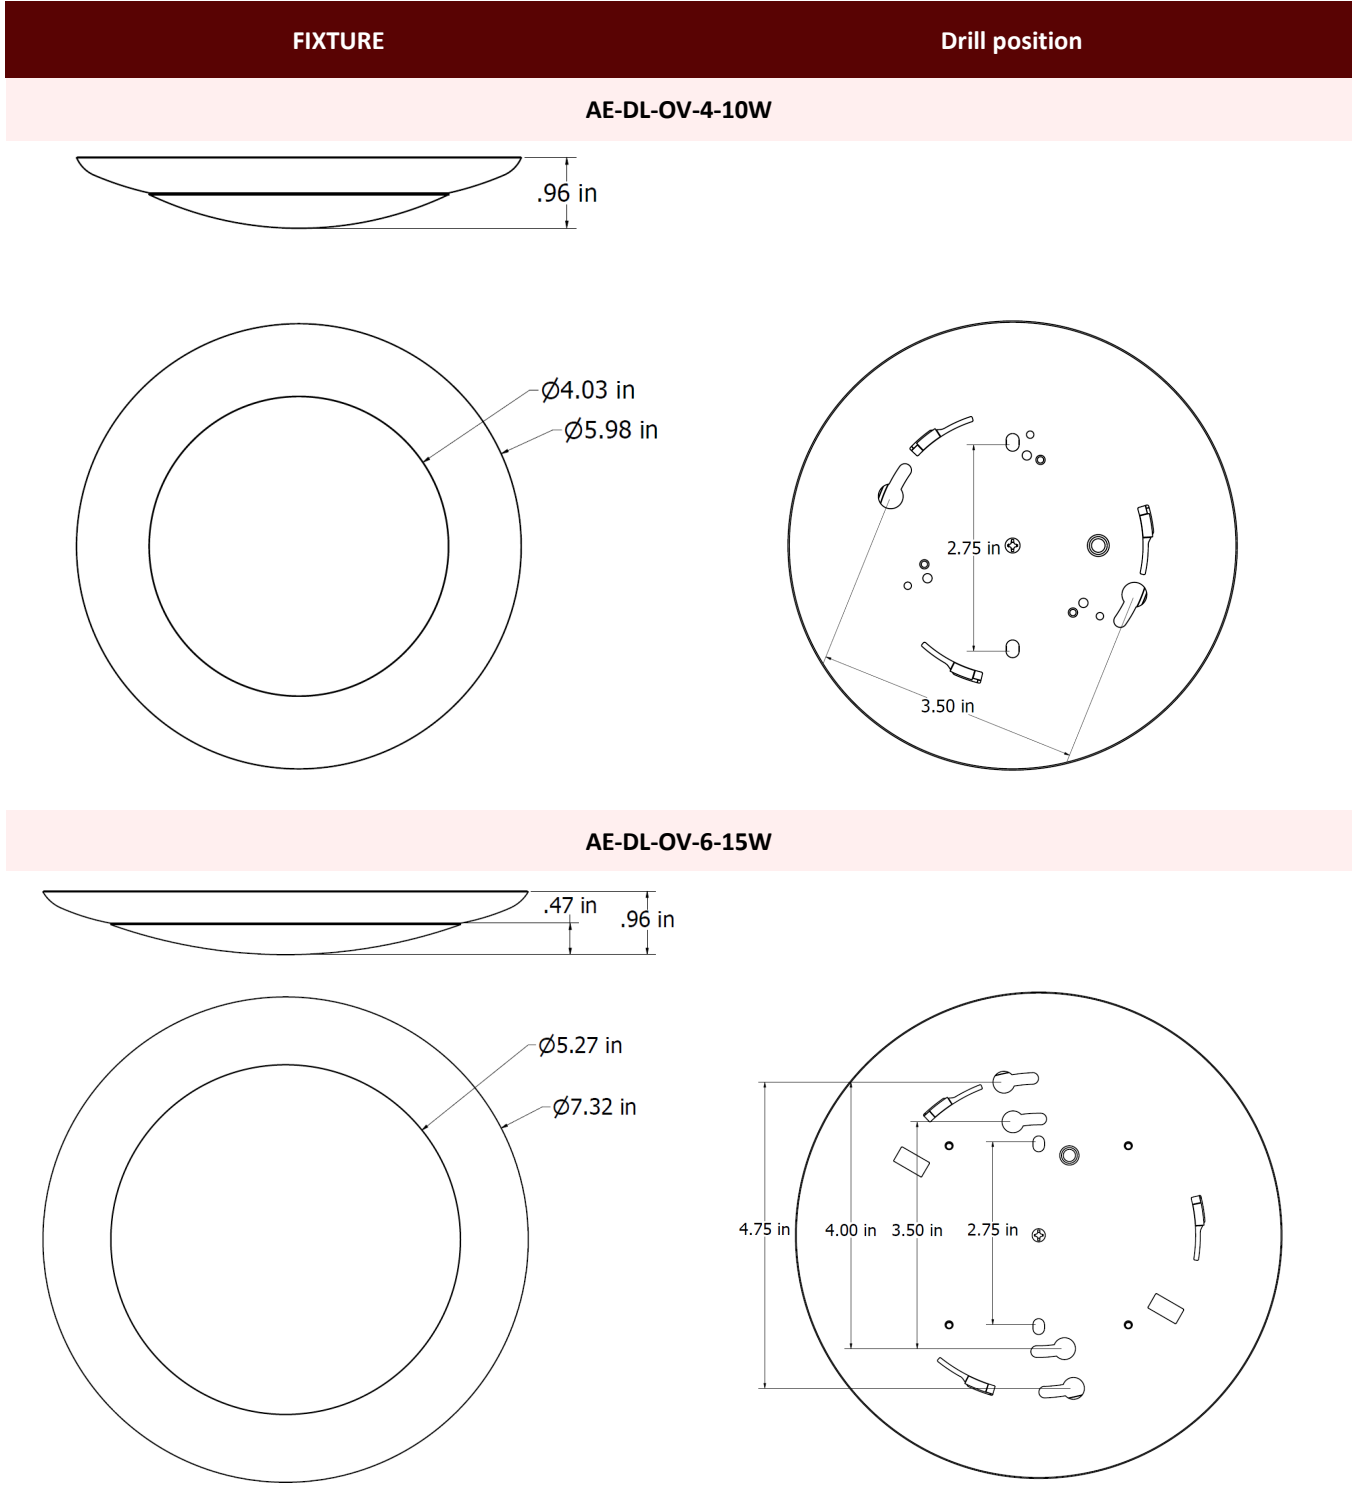


### ACCESSORIES


Accessory for Recessed retrofit into can

Installation Sketch


AE-DL-OV-4-ACC-CAN-KIT

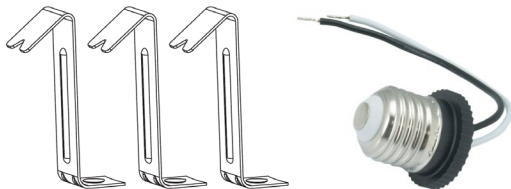


3 Mounting Bracket  
E26 Base Whip

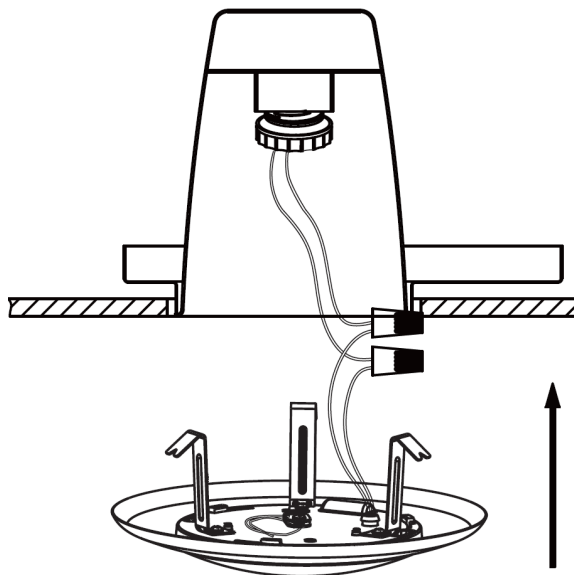

AE-DL-OV-6-ACC-CAN-KIT

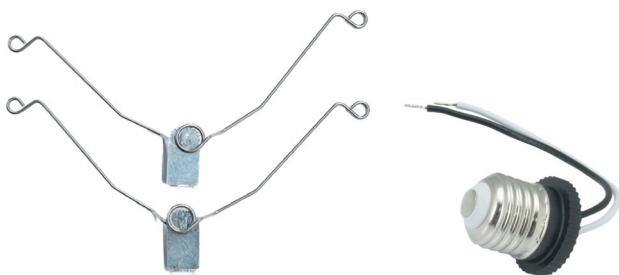

2 Spring Clip  
E26 Base Whip

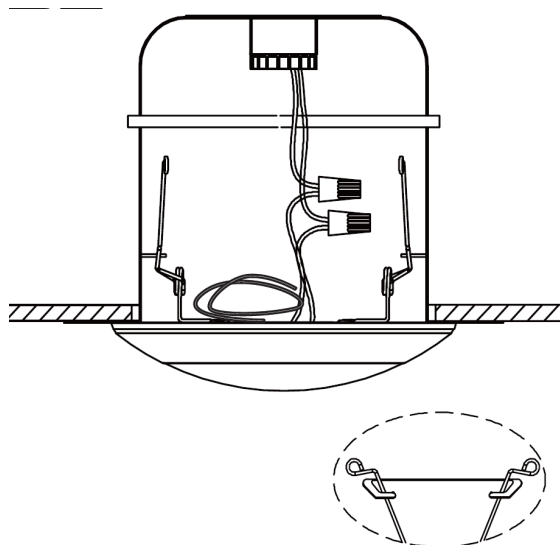

CONTROLS


Ordered separately, field installed

EMERGENCY LED DRIVER (BLD-HMXXD-YYY)

BLD-HM8D-YYY



The BLD-HMXXD-YYY series LED Emergency Driver is UL listed for field and factory installations. It switches to emergency mode during power failures, providing up to 90 minutes of lighting. With an integrated battery, charger, and converter, it delivers 6-25W constant power at 170VDC. Ideal for 0-10V dimmable indoor commercial LED fixtures, such as flat panels, troffers, downlights, and linear strip lights.

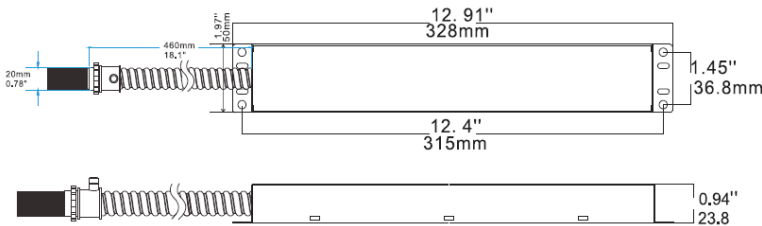

ROOM OCCUPANCY SENSOR

PART NUMBER	DESCRIPTION
AE-CT-DT806	Line Voltage Motion Sensor
RC102	RC102 Remote Control



SPECIFICATIONS	
Input Voltage	100-347 Vac
Power Frequency	50/60HZ
Input Power	8W max
Output Voltage	170V Dc
Output Power	8W
Ambient Temperature	0°C to 50°C 30°F to 122°F
Installation	Remote

SPECIFICATIONS		
Input Voltage	120-277 Vac	
Power Frequency	50/60HZ	
Rated Load	At 120 Vac	800W
	At 277 Vac	1200W
Detection Range	3-10 Meters	
	9.8-32.8 Feet	
Standby Power	~0.9W	
Time Setting	10 sec to 30 min	
Light Control	10-2,000LUX	
Installation	Ceiling Mounted	

## LED COMMERCIAL DOWNLIGHT

Surface Mount Disk | 4" &amp; 6" Round

## DIMMER COMPATIBILITY LIST

TRIAC Dimming

Brand	Model	Brand	Model
LUTRON	SCL-153P	LUTRON	CL-6683
	CTCL-153P		IPLO6
	DVCL-153P		CL-6672
	MACL-153M		MACL-153M
	MACL-153MR-WH		EDV-600P
	CL-6674		153M-ES
	TG-600PH-LA		



## LUMENS ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

## LUMEN ESTIMATE ADJUSTMENT FACTORS

CCT	2700K	3000K	3500K	4000K
NORMAL	0.97	1	1.03	1.05

## PHOTOMETRIC DATA

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY
AE-DL-OV-4-10W-5CCT-R90-WH		Zone	Lumens	% Fixture	
Wattage	10W	0-20°	67.25	11.8	
CCT	3500K	0-30°	143.7	25.2	
Distribution	110°	0-40°	236.76	41.5	
		0-60°	427.51	74.9	
		0-80°	552.27	96.8	
		0-90°	570.79	100	
PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY
AE-DL-SL-06-XX		Zone	Lumens	% Fixture	
Wattage	15W	0-20	105.93	12.3	
CCT	3500K	0-30	225.25	26.1	
Distribution	110°	0-40	369.24	42.7	
		0-60	659.16	76.3	
		0-80	839.94	97.2	
		0-90	864.4	100	

## OVERVIEW



### Innovative Design

- Iron housing for better heat dissipation.



### Multiple Options

- 2 sizes 4" and 6"
- 5 CCT switchable from 2700K to 5000K.



### Mountings Available

- Surface mount to a junction box size:  
2.75" or 3.5" for 4" OVA  
2.75", 3.5", or 4" for 6" OVA
- Recessed retrofit using additional accessories.



### Tests And Certifications



Emergency  
backup battery

