

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect


The SPS series is a revolutionary compact product features slim profile with the ability to adjust lumen output and offers a variety of indirect and direct options. It even offers the unique option of 100% indirect. Whether its pendant mount or wall mount; our linear supports continuous runs, creating a unified lighting design that enhances the aesthetic of any environment, in addition to wall wash optic.

Applications: Art Galleries | Office | Retail Stores | Hospitality.

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				


DYNAMIC MENU	
Order Information	Page 2
Dimensions	Page 5
Accessories	Page 7
Photometric Data	Page 10

[Install Instruction link](#)

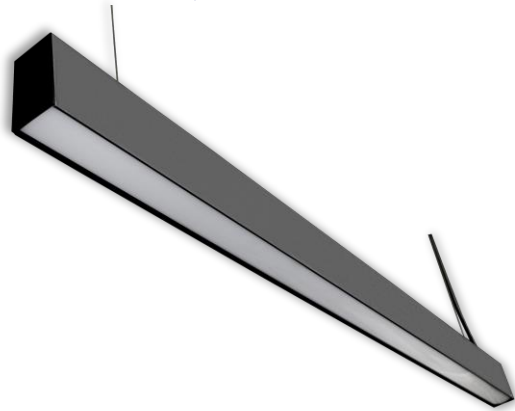

SPECIFICATIONS

Input Voltage	120-347V			
Power Factor	>0.9			
Total Harmonic Distortion	<20%			
Dimming Page 3	0-10V dimming			
CRI	90 CRI			
CCT	30K 35K 40K 50K			
Efficacy	~75-88 lm/W		Up to 1100 lm/ft	
Length	2' 3'	4'	6'	8'
Power	30W	50W	80W	100W
Ambient Temperature Range	-10°C to 40°C			
Mounting Options	Suspended			
Fixture Finish	Black White Silver Gun powder 			
Custom Design	Continuous runs			
Optics	Polycarbonate lens Wall Wash			



PRODUCT FEATURES



PRODUCT CERTIFICATIONS



SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE – L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect



ORDERING GUIDE

AE-SF-SPS-A-CA		-B-P		-010	
AE-SF-SPS-A-CA ERALUX SPS Linear Architectural Fixture 120-347V input voltage	-2 30 2ft 20/30W up to 2,460lm -3 30 3ft 20/30W up to 2460lm -4 50 4ft 30/40/50W up to 4,100lm -6 80 6ft 50/60/80W up to 6,560lm -8 100 8ft 60/80/100W up to 8,200lm C Continuous length increment of 1ft (Select or type the length then click on 'C')	-B-P 90 CRI	30-35-40¹ 3000/3500/4000K selectable 30-40-50 3000/4000/5000K selectable	-010 0-10V external dimming down to 10%	-PL Full length polycarbonate -WW Wall Wash

Fixture Family	Length Power	CRI	CCT	Dimming	Diffuser
-WH White -BK Black -SV Silver -GN Gun powder	[BLANK] 30% direct 70% indirect -60U40D² 40% direct 60% indirect -50U50D² 50% direct 50% indirect -100U² 0% direct 100% indirect	[BLANK] No option LDE³ Fade-to-Black down to 1% EMBB⁴ Emergency battery backup 1DIM⁵ 1% Dimming	-PU -PU18 -PH -PH18	[BLANK] No Canopy -C	[BLANK] Standard 8 FT suspension cables -W18

Finish	Distribution	Option	Power Cord	Canopy	Aircraft Cable
--------	--------------	--------	------------	--------	----------------

REFER BELOW FOR DETAILED DESCRIPTION FOR SUSPENSIONS KIT

-PU	8ft power cord 120-277V 8ft aircraft cable	-PU18-W18	18ft power cord 120-277V 18ft aircraft cable
-PU-C	8ft power cord 120-277V 8ft aircraft cable 2 pieces of 5-inch canopies	-PU18-C-W18	18ft power cord 120-277V 18ft aircraft cable 2 pieces of 5-inch canopies
-PH	8ft power cord 120-347V 8ft suspension wires	-PH18-W18	18ft power cord 120-347V 18ft suspension wires
-PH-C	8ft power cord 120-347V 8ft aircraft cable 2 pieces of 5-inch canopies	-PH18-C-W18	18ft power cord 120-347V 18ft aircraft cable 2 pieces of 5-inch canopies

NOTES

- Default CCT setting is 3500K but can be changed upon request before shipping.
- 50, 60 & 100% up light are not CCT switchable
- LDE1 is a Lutron Hi-lume EcoSystem driver with Soft-on, it requires color selection if not the default CCT, 3500K.
- EMBB option available in 120-277V only.
- 1DIM available only in 120-277V, it works for 4,6,8 FT

CAUTION:

- If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.
- Maximum of 300W per electrical drop.

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

ORDERING GUIDE – TRIAC Dimming

AE-SF-SPS-A-CA		-B-P		-TRI-PL	
ERALUX SPS Linear Architectural Fixture	2 15 2ft 20W 3,150lm	-B-P 90 CRI	30 3000K	-TRI-PL TRIAC Dimming Full length polycarbonate lens	-WH White
Standard 30% indirect 70% direct light	4 40 4ft 40W 5,250lm		35 3500K		-BK Black
	8 80 8ft 80W 10,500lm		40 4000k		
Fixture Family	Length Power	CRI	CCT	Dimming Lens	Finish

CAUTION:

- If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.
- Maximum of 300W per electrical drop.

DIMMER COMPATIBILITY LIST

0-10V Dimming

BRAND	MODEL	BRAND	MODEL
LEVITON	IP710-LFZ	LEGRAND	RH4FBL3PTC
	DS710	EATON	WBSD-010SLD
LUTRON	DVS7V-WH	HUBBLE	LHDIRS3N
	MS-Z101		

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

LUMEN OUTPUT

LENGTH	Efficacy	Power	100% Indirect	70% Direct 30% Indirect
2FT & 3FT	Avg 100-110 LPW	20/30 watts switchable	20W only 2200 lm	14W 1540 lm down, 6W 660 lm up
				21W 2310 lm down, 9W 990 lm up
4FT		30/40/50 watts switchable	40W only 4400 lm	21W 2310 lm down, 9W 990 lm up
				28W 3080 lm down, 12W 1320 lm up
				35W 3850 lm down, 15W 1650 lm up
6FT		50/60/70 watts switchable	50W 5500 lm	35W 3850 lm down, 15W 1650 lm up
				42W 4620 lm down, 18W 1980 lm up
8FT		60/80/100 watts switchable	60W 6600 lm	49W 5390 lm down, 21W 2310 lm up
				42W 4620 lm down, 18W 1980 lm up
			80W 8800 lm	56W 6160 lm down, 24W 2640 lm up
	70W 7700 lm down, 30W 3300 lm up			

LENGTH	40% Direct 60% Indirect	50% Direct 50% Indirect
2FT & 3FT	8W 880 lm down, 12W 1320 lm up	10W 1100 lm up & down
	12W 1320 lm down, 18W 1980 lm up	15W 1650 lm up & down
4FT	12W 1320 lm down, 18W 1980 lm up	15W 1650 lm up & down
	16W 1760 lm down, 24W 2640 lm up	20W 2200 lm up & down
	20W 2200 lm down, 30W 3300 lm up	25W 2750 lm up & down
6FT	20W 2200 lm down, 30W 3300 lm up	25W 2750 lm up & down
	24W 2640 lm down, 36W 3960 lm up	30W 3300 lm up & down
8FT	28W 3080 lm down, 42W 4620 lm up	35W 3850 lm up & down
	24W 2640 lm down, 36W 3960 lm up	30W 3300 lm up & down
	32W 3520 lm down, 48W 5280 lm up	40W 4400 lm up & down
	40W 4400 lm down, 60W 6600 lm up	50W 5500 lm up & down

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

DIMENSIONS

SIZE	TOP/BOTTOM VIEW	SIDE VIEW
2FT	 	
3FT	 	
6FT	 	

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect


DRILLING PATTERN

SIZE




STAND ALONE INSTALLATION


2FT




4FT

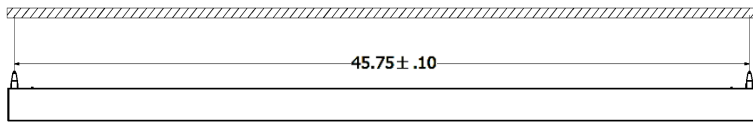

6FT

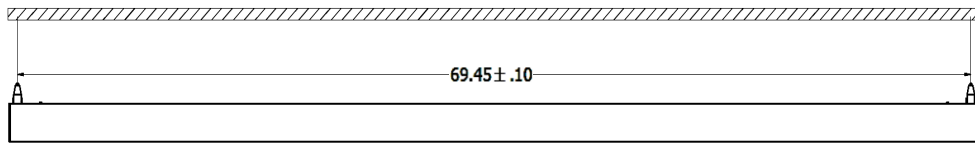

8FT

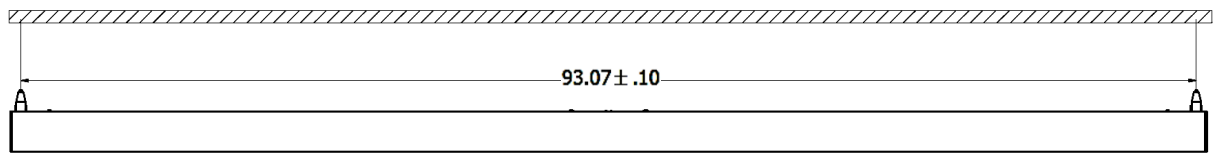


SIZE




CONTINUOUS RUN INSTALLATION


2FT

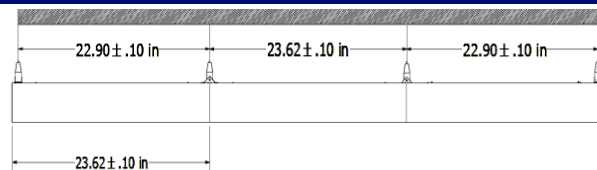


4FT

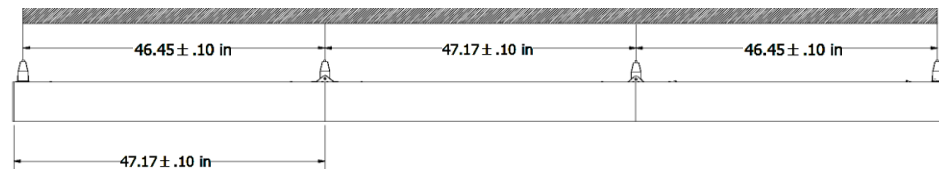

6FT

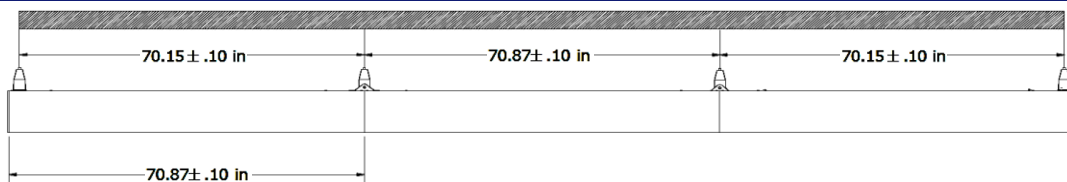

8FT

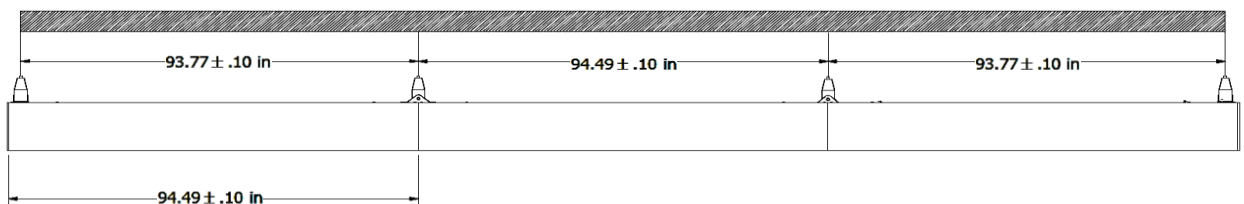

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

ACCESSORIES FOR SUSPENDED

Ordered separately if needed

POWER CORD

ORDER CODE	DESCRIPTION	PICTURE
AE-SF-PWRCORD-WH AE-SF-PWRCORD-BK	8' white / black power cord with 120-277V input voltage	
AE-SF-PWRCORD-WH-18FT AE-SF-PWRCORD-BK-18FT	18' white / black power cord with 120-277V input voltage	
AE-SF-PWRCORD-HV-WH AE-SF-PWRCORD-HV-BK	8' white / black power cord with 120-347V input voltage	
AE-SF-PWRCORD-WH-18FT AE-SF-PWRCORD-BK-18FT	18' white / black power cord with 120-277V input voltage	

CANOPY

ORDER CODE	DESCRIPTION	PICTURE
AE-SF-CANOPY-WH-5IN AE-SF-CANOPY-BK-5IN	2 pieces per set white / black 5" canopy 0.8" thickness One for power cord/aircraft cable and one for aircraft cable	
AE-SF-CANOPY-WH-5IN-SUSP AE-SF-CANOPY-BK-5IN-SUSP	1 piece white / black 5" canopy 0.8" thickness for aircraft cable	
AE-SF-CANOPY-WH-ELITE AE-SF-CANOPY-BK-ELITE	2 pieces per set white / black 5" canopy 0.3" thickness One for power cord/aircraft cable and one for aircraft cable	

AIRCRAFT CABLE


ORDER CODE	DESCRIPTION	PICTURE
AE-SF-G5/SPT-WIRE-8FT	8ft aircraft cable 2 pieces per set 1 set / fixture	
AE-SF-G5/SPT-WIRE-18FT	18ft aircraft cable 2 pieces per set 1 set / fixture	

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

ACCESSORIES

For Continuous Run

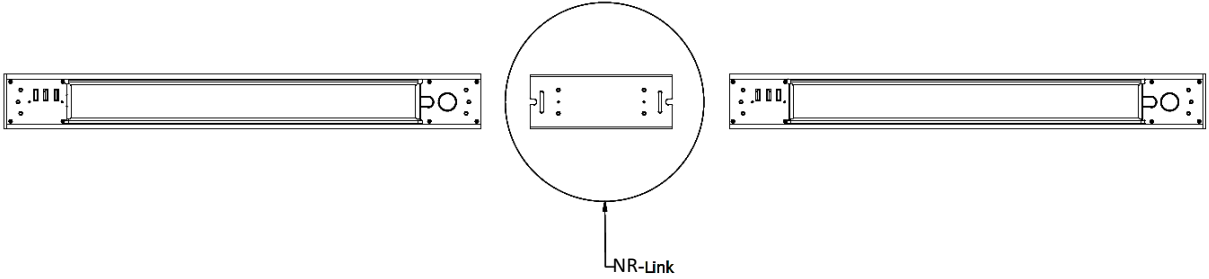

NR-LINK	
ORDER CODE	DESCRIPTION
AE-SF-LINK-NR	Seamless mechanical connection for continuous runs Preventing Light Leakage Easy installation

DIFFUSER OPTIONS

Wall Wash Lens

Description	Pictures
-------------	----------

The wall washing is a feature where the luminaire is typically positioned at least 12" from the wall to enhance the smoothness of a wall by eliminating shadows or to highlight a wall to create visual interest. The wall wash lens is available for all continuous sizes; 4FT and 8FT.



LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

CONTROLS


Ordered separately, field installed

EMERGENCY LED DRIVER (BLD-HMXXD-YYY)

BLD-HM8D-YYY



The BLD-HMXXD-YYY series LED Emergency Driver is UL listed for field and factory installations. It switches to emergency mode during power failures, providing up to 90 minutes of lighting. With an integrated battery, charger, and converter, it delivers 6-25W constant power at 170VDC. Ideal for 0-10V dimmable indoor commercial LED fixtures, such as flat panels, troffers, downlights, and linear strip lights.

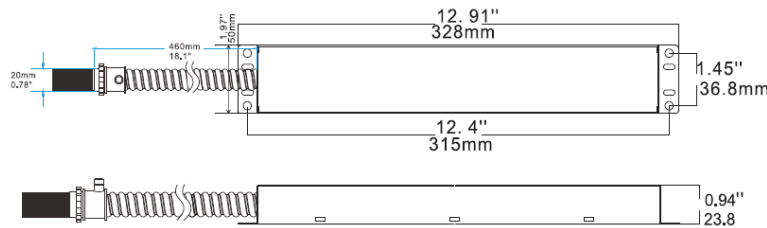


SPECIFICATIONS	
Input Voltage	100-347 Vac
Power Frequency	50/60HZ
Input Power	8W max
Output Voltage	170V Dc
Output Power	8W
Ambient Temperature	0°C to 50°C
	30°F to 122°F
Installation	Remote

ROOM OCCUPANCY SENSOR

Ordered separately, field installed

PART NUMBER	DESCRIPTION
AE-CT-DT806	Detecta - Room Occupancy Sensor
RC102	RC102 Remote Control

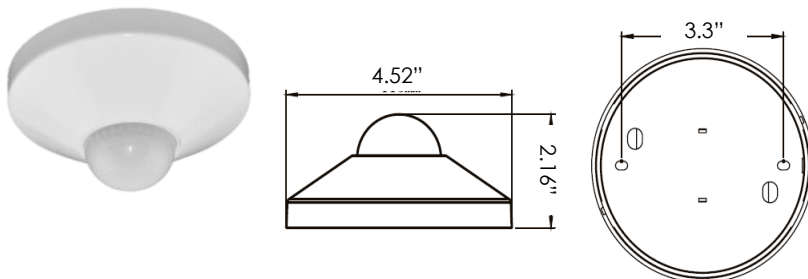

SPECIFICATIONS	
Input Voltage	120-277 Vac
Power Frequency	50/60HZ
Rated Load	At 120 Vac 800W
	At 277 Vac 1200W
Detection Range	3-10 Meters
	9.8- 32.8 Feet
Standby Power	~0.9W
Time Setting	10 sec to 30 min
Light Control	10-2,000LUX
Installation	Ceiling Mounted

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS

CCT	3000K	3500K	4000K	5000K
PREMIUM (90CRI)	0.94	0.97	1	1.03

PHOTOMETRIC DATA

PART NUMBER		ZONAL LUMEN SUMMARY			POLAR LUMINOUS INTENSITY	CONE DISTRIBUTION			
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Direct / Indirect Light		Center Beam Fc	Beam Width	
Wattage	40W	0-20°	404.75	9.70		2.5ft	191 fc	6.6 ft	5.3 ft
CCT	3500K	0-30°	828.84	19.80		5.0ft	47.7 fc	13.1 ft	10.6 ft
Distribution	95°	0-40°	1313.54	31.40		7.5ft	21.2 fc	19.7 ft	15.9 ft
Length	4ft	0-60°	2223.66	53.20		10.0ft	11.9 fc	26.2 ft	21.2 ft
Proportion	30% up 70% down	0-80°	2728.82	65.30		12.5ft	7.63 fc	32.8 ft	26.5 ft
		0-90°	2791.1	66.80		15.0ft	5.3 fc	39.3 ft	31.8 ft
					■ Vert. Spread: 105.3° ■ Horiz. Spread: 93.3°				
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Indirect Light		Center Beam Fc	Beam Width	
Wattage	40W	90-110°	149.26	4.4		2.5ft	250 fc	5.8 ft	4.7 ft
CCT	3500K	90-120°	485.57	14.3		5.0ft	62.4 fc	11.6 ft	9.4 ft
Distribution	95°	90-130°	988.01	29.2		7.5ft	27.7 fc	17.3 ft	14.1 ft
Length	4ft	90-150°	2257	66.6		10.0ft	15.6 fc	23.1 ft	18.8 ft
Proportion	100% up	90-180°	3387.73	100		12.5ft	9.99 fc	28.9 ft	23.5 ft
		110-180°	3238.47	95.6		15.0ft	6.94 fc	34.7 ft	28.2 ft
					■ Vert. Spread: 98.3° ■ Horiz. Spread: 86.6°				
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Direct / Indirect Light		Center Beam Fc	Beam Width	
Wattage	50W	0-20°	264.83	6.5		2.5ft	120 fc	5.7 ft	4.6 ft
CCT	3500K	0-30°	543.66	13.4		5.0ft	30.1 fc	11.4 ft	9.3 ft
Distribution	95°	0-40°	855.31	21		7.5ft	13.4 fc	17.1 ft	13.9 ft
Length	4ft	0-60°	1388.72	34.1		10.0ft	7.53 fc	22.8 ft	18.6 ft
Proportion	60% up 40% down	0-80°	1615.42	39.7		12.5ft	4.82 fc	28.5 ft	23.2 ft
		0-90°	1617.97	39.7		15.0ft	3.35 fc	34.2 ft	27.9 ft
					■ Vert. Spread: 97.5° ■ Horiz. Spread: 85.8°				
AE-SF-SPS-A-CA-450		Zone	Lumens	% Fixture	Direct Light		Center Beam Fc	Beam Width	
Wattage	50W	0-20°	395.54	15.7		2.5ft	176 fc	5.8 ft	3.8 ft
CCT	3500K	0-30°	819.37	32.6		5.0ft	44.1 fc	11.6 ft	7.7 ft
Distribution	95°	0-40°	1291.53	51.3		7.5ft	19.6 fc	17.4 ft	11.5 ft
Length	4ft	0-60°	2078.68	82.6		10.0ft	11 fc	23.2 ft	15.3 ft
WALL WASH LENS		0-80°	2461.84	97.8		12.5ft	7.05 fc	29.0 ft	19.2 ft
		0-90°	2488.97	98.9		15.0ft	4.9 fc	34.8 ft	23.0 ft
					■ Vert. Spread: 98.4° ■ Horiz. Spread: 75.0°				

LINEAR LED LIGHT

Suspended Architecture Linear | 1.5" Aperture | Direct/Indirect

OVERVIEW



Innovative Design

- Extruded aluminum housing for better heat dissipation.
- Highly durable polycarbonate and high transmittance lens.




Diffusers

- Polycarbonate lens
- Wall-wash lens



Multiple Options

- Four standard length available; 2, 4, 6, & 8ft.
- Three CCT switchable and power tunable.
- Black, white, silver, & gun powder finishes.



Distribution

- 70% Direct & 30% Indirect light.
- 50% Direct & 50% Indirect light.
- 40% Direct & 60% Indirect light.
- 0% Direct & 100% Indirect light.
- 120° beam angle.



Mountings Available

- Suspended.
- Wall mount (refer to the wall-mount spec sheet)



Tests And Certifications



Features

- 1% dimming option
- Lutron Hi-lume Ecosystem driver with Soft-on

