

An aerial photograph of a tropical beach. The top half of the image shows a dense line of green palm trees and other tropical vegetation. Below the trees is a wide, white sandy beach. Long, dark shadows of the palm trees are cast onto the sand. In the lower part of the beach, two small figures of people are visible. The bottom half of the image shows the turquoise ocean with gentle waves lapping at the shore.

enlux®

LED LUMINAIRES
CATALOG 2025

eralux®

CEO'S NOTE

FOUNDER OF ERALUX

The idea of ERALUX was born in 2017 with a mission to continuously provide access to energy-saving solutions to our customers and partners. This company is built on four core values which are People, Integrity, Accountability and Fluidity. With these four core values, we have set ourselves apart from a wide range of manufacturers in the industry. Despite being a young company, we can proudly say that we have become the trusted advisor for many key projects and landmarks around North America.

Together at ERALUX, we believe in potential and limitless possibilities for our future. Applying our advanced LED technology, we strive for a cleaner light source while being practical in our luminaire products. Our unparalleled customer service level along with our solid say-do ratio for on-time deliveries makes us one of the best choices for the industry. Our unique portfolio also continues to expand as we tailor our specifications to new market demands and requirements. Our agile product development practices make us one of the fastest product development teams in the world.

ERALUX is a company further established by gratitude, reliability, and transparency where every order matters, and we value the freedom of design. We are a company that puts worth in the smallest of details and work to ensure that the customer experience with our products and services is unmatched. We are a different organization based on the principles of meritocracy and extreme candour. Our team pushes the limit of the definition of unyielding integrity while conducting business. Our partners find themselves working with a unique company.

As the ERALUX Team marks another year of completing several new product introduction programs, I am pleased to present you with the 2024-2025 ERALUX catalogue. I hope you can admire the growth that this company has gone through with me.

I sincerely hope you enjoy browsing through our selection of luminaires.

Best Regards,



David Wan Fong

CEO & President of ERALUX

Our Mission

To continuously help our customers access better energy-saving solutions by leveraging progressive technologies.

Core Values



People

We have a talent-based culture passionate about energy footprints.



Integrity

We do what is right.



Accountability

We deliver on our promise.



Fluidity

We are easy to do business with.

COMPANY ACHIEVEMENT

ERALUX has been consecutively recognized among the list of Best Workplaces in Manufacturing and Best Workplaces in Start-ups in 2022 and 2023. Our team is proud to provide energy-saving solutions while upholding our values of People, Integrity, Accountability and Fluidity.

At ERALUX, our agile product development practices make us one of the fastest product development teams. This agility allows us to quickly adapt to changes and bring new, cutting-edge products to market faster than our competitors. By fostering a culture of innovation and continuous improvement, we are able to stay ahead in a rapidly changing industry.

Our team's dedication to pushing the boundaries of what's possible with LED technology ensures that we remain at the forefront of the lighting revolution, delivering products that illuminate a brighter, more sustainable future.



WHY SHOULD YOU CHOOSE ERALUX?

SUPERIOR PRODUCT QUALITY

As a leading LED lighting manufacturer, we offer exceptional quality products designed to high energy standards.

INNOVATIVE DESIGN

Our innovative approach allows us to create advanced lighting solutions for a variety of indoor and outdoor applications.

COMMITMENT TO ENERGY SAVINGS

We are committed to helping you save energy through our environmentally responsible LED lighting solutions.

RESPONSIVE CUSTOMER SERVICE

Our dedicated team is ready to respond to your needs and provide you with an exceptional customer experience.

WIDE RANGE OF PRODUCTS

Our comprehensive portfolio includes a variety of product categories to meet your diverse lighting requirements.

CYLINDERS - p16

ELEGANZA SLIM



ELEGANZA



ELEGANZA MAX



ELEGANZA MAX
WALL MOUNT



COMMERCIAL OFFICE - p22

ALPS EVOLVE



ALPS HYDRO



MONT BLANC
EVOLVE



G5 T-GRID



ATLANTIS



DOWNLIGHTS - p30

SLIMA SERIES



VERSA EVOLVE



RING/DOUBLE RING



DISCO SERIES



ARTISTA
347 EVOLVE



TANGO SERIES



INFINITA EVOLVE 4"



INFINITA EVOLVE 8"



KINETA SERIES



GUARDIAN



UNA



DUA



TRIA



SB2



SB3



LMT



INDUSTRIAL - p52

TT2



TR



JB



MRE



VDE



LINEARS - p62

VDHO



G5



G5 PRIME



G5 PRIME SHADOW



SPT



SPT PRIME



G6



SPS



FALCON



LX SERIES



ATLANTIS



F2 SERIES



FLEXA/FLEXY



SAPPHIRE



SAPPHIRE X



ZORRO ELITE



OUTDOOR - p84

RIZZUTO



GENESYS



SHREDDER



BEBOP



ROCKSTEADY



KRANG



BAXTER



CASEY



APRIL



SPLINTER



RAPHAEL



LEONARDO



MICHELANGELO



DONATELLO



TRON



GRETA



IDA



LOKI SERIES



CHRONOS



THALASSA ECO



THALASSA ET6020



THALASSA ET6022



THALASSA ET6024



THALASSA ET6120



THALASSA ET6123



THALASSA ET6150



THALASSA ET6161



ATHENA



ZEUS



FUJI



ETNA



MAUNA



FOGO



TZ



PIVOT



KEPLER SERIES



MAVEN SERIES



TRACKLIGHTS - p126

ARTEMIS



HUBBLE



EUCLID



IRIS



OSIRIS



CHANDRA SERIES



DREAM CHASER SERIES



NUSTAR



APOLLO



ODYSSEY



TERRA SERIES



ASTRO LINE



TRACK SYSTEMS



GFP38



GIMBALS - p152

2230



2231



2408U



EXITA SERIES - p156

5024



5025



Z1101U



Z1102U



Z1102U-N



7037



7105P



7082RX



7108R



7110



7111C



7111S



2017 November - Founded



Eralux is an industry-leading LED lighting manufacturer based in Montreal. Our reputation is built on our ability to create innovative and environmentally friendly lighting solutions.

2019 July - First Canadian Agent



The company has signed the first agent in Canada, marking a milestone in its expansion into the North American market. This provides Canadian clients with direct access.

2019 - A Lot of Firsts



2019 May

The company moved to a co-sharing space in Saint-Laurent, a bustling neighborhood known for its vibrant community and innovative spirit.



2019 September

Eralux moved to its own office in Saint-Laurent and signed 3PL agreement with a reputable logistics company, marking a milestone for the business.

2020 December - Growth



Continued growth made it necessary to move to new space in Saint-Laurent. The new facility, spacious and modern, offered room for expansion and innovation. Employees were thrilled with the upgraded amenities.

2021 October - First US Agent



The company has signed the first agent in the US, marking a milestone in its expansion into the North American market. This provides the US clients with direct access.

2022 April - New Headquarter



Moved to our new HQ at 5650 Royalmount Ave, Mont-Royal. As we settle into 5650 Royalmount Ave, we remain committed to our mission, ready to achieve new heights and make a positive impact.

2023 December - Additional Distribution Centers



Eralux added 40,000 of satellite warehouse space in Saint-Laurent and increased its storage capacity to better serve its growing customer base. Cheers to a new beginning!






BRINGING LIGHT INTO WORKSPACES

Commercial setting heightened to elegant levels

Lights areas for employees to create an environment that is ideal for productivity and increased focus, and mood. With these durable and energy-efficient LED fixtures, ERALUX offers commercial office lights that are available in a range of power and CCT that will provide the ideal brightness and light colour for increased productivity and comfort for workers and clients.

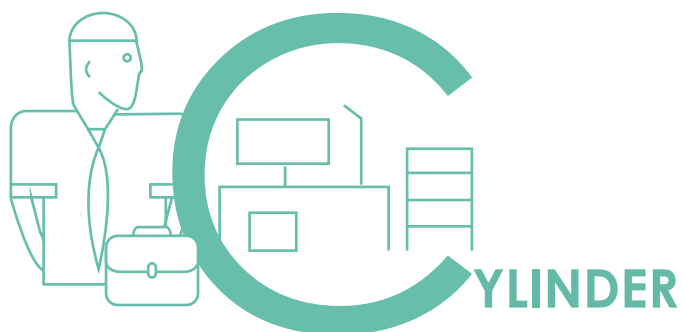



The ELEGANZA SLIM Cylinder Series is a continuation of the ELEGANZA cylinder family. It is a beautiful and elegant solution for open ceilings, and it has a distinctive design featuring a machined aluminum body, and attention to detail including the installation process. The modularity of ELEGANZA enables stem mount, surface mount, cable mount, and pendant mount applications. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, robustness and quality.


OPERATIONS & ELECTRICAL

Input Voltage: 120-277 Vac

Dimming: Triac & 0-10 V dimming

Lumens per Watt: 80-85 LPW at 90 CRI

DIMENSIONS

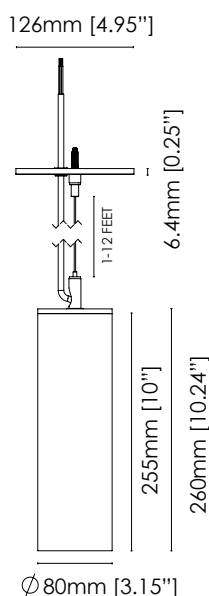

ELEGANZA SLIM

ORDERING GUIDE

Ordering code example: AE-TL-EZS10-SF-10-P30FL-WH

FIXTURE FAMILY	HEIGHT	MOUNTING METHOD	POWER	CCT	BEAM ANGLE	FINISH*
AE-TL-EZS ERALUX Eleganza Slim indoor cylindrical pendant fixture	10 10.91" fixture height	-SF Surface mounted fixture mounting method	-15 15 watts: 1200 lumens at 90CRI 3000K	-P30 3000K CCT	SP 15° beam angle	-WH White powder coat finish RAL9003
		-PC Cable mounted fixture mounting method [-12 12' cable adjustable]		-P35 3500K CCT	NF 25° beam angle	-BK Black powder coat finish RAL9004
		-SM Stem mounted fixture mounting method [-01 1' stem / -02 2' stem / -03 3' stem / -04 4' stem]		-P40 4000K CCT	FL 40° beam angle	-SV Silver powder coat finish RAL9006
					WF 60° beam angle	-RALXXXX* Customized finish

* Custom color finish available. Please contact us for more information and pricing



The Eleganza Pendant Series is a beautiful and elegant solution for open ceilings and it has a distinctive design featuring machined aluminum body, attention to detail including the installation process. Eleganza also has an impressive LPW providing performance as well as elegance in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of fitness, robustness and quality. It comes in various mounting options such as wall mount, surface mount, pendant and cord stem mount.

OPERATIONS & ELECTRICAL




Input Voltage: 120-277 Vac

Dimming: Tri Mode Dimming™ (Triac, ELV & 0-10V)

Lumens per Watt: 95 LPW at 90 CRI

ELEGANZA

DIMENSIONS

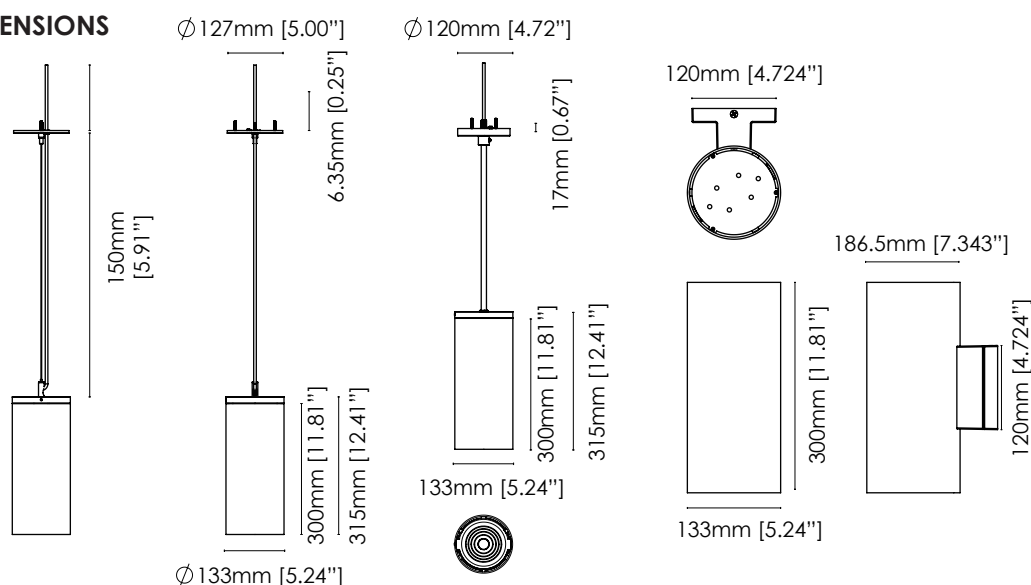

ORDERING GUIDE

Ordering code example: AE-TL-EZ-40R12-SF-00-20-C3030-P-T-WH

FIXTURE FAMILY	PRODUCT CODE	HEIGHT	MOUNTING METHOD	POWER	CCT	BEAM ANGLE	CRI	FINISH*
AE-TL-EZ ERALUX Eleganza indoor cylindrical pendant fixture	-40R	12 12" fixture height	-SF-00 Surface mounted fixture mounting method	-20 20 watts: 1,900 lumens at 90CRI 3000K	-C27 2700K CCT	15 15° beam angle	-P-T Premium 90 CRI	-WH White powder coat finish coat finish RAL9003
			-WM-00 Wall mount fixture mounting method	-28 28 watts: 2,400 lumens at 90CRI 3000K	-C30 3000K CCT	30 30° beam angle		-BK Black powder coat finish coat finish RAL9004
			-PC Pendant Cord fixture mounting method [-03 3' cable / -06 6' cable / -09 9' cable / -12 12' cable]	-28 28 watts: 2,400 lumens at 90CRI 3000K	-C35 3500K CCT	40 40° beam angle		-SV Silver powder coat finish RAL9006
			-SM Stem mount fixture mounting method, stem length [-01 1' stem / -02 2' stem / -03 3' stem / -04 4' stem]	-28 28 watts: 2,400 lumens at 90CRI 3000K	-C40 4000K CCT	55 55° beam angle		-RALXXXX Customized finish



The ELEGANZA MAX Pendant Series is a beautiful and elegant solution for open ceilings, and it has a distinctive design featuring machined aluminum body, attention to details including the installation process. This product is a complete aluminum die cast offering an unparalleled sense of finesse, robustness and quality. It comes in various mounting options such as surface mount, pendant and stem mount. The Eleganza MAX can further with enhanced with several accessories such as the Snoot, Pin-hole or Decorative trim.

OPERATIONS & ELECTRICAL


Input Voltage: 120-277 Vac

Dimming: Tri Mode Dimming™ (Triac, ELV & 0-10V)

Lumens per Watt: 73 LPW at 90 CRI (Standard)

79 to 91 LPW at 83 CRI

DIMENSIONS

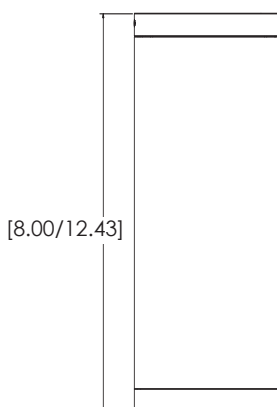

ELEGANZA MAX

ORDERING GUIDE

Ordering code example: AE-CYL-EZM-50R12-SF-00-50-2715-P-T-WH

FIXTURE FAMILY	PRODUCT CODE	HEIGHT	MOUNTING METHOD	POWER	CCT	BEAM ANGLE	CRI	FINISH*
AE-TL-EZM Eleganza MAX indoor cylindrical stem mounted fixture	-50R	12 12" fixture height	-SF-00 Surface mounted fixture mounting method	-50 50 Watts	-27 2700K CCT 3,633 lms	15 15° beam angle	-P-T Premium 90 CRI	-WH White powder coat finish
			-PC-12 12' Pendant Cord Mounting Adjustable from 1' to 12'	*Can be pro- grammed from 19-50 Watts	-30 3000K CCT 3,741 lms	30 35° beam angle		-BK Black powder coat finish
			-SM (only WH&BK) Stem mount fixture mounting method, stem length [-02 2' stem / -03 3' stem / -04 4' stem]		-35 3500K CCT 3,854 lms	40 40° beam angle		-SV Silver powder coat finish
					-40 4000K CCT 3,969 lms	55 55° beam angle		-RALXXXX Customed finish

* Custom color finish available.
Please contact us for more information and pricing




The Eleganza Max Wall-Mount Series is a beautiful and elegant solution for open ceilings, and it has a distinctive design featuring machined aluminum body. This product is a complete aluminum die cast offering an unparalleled sense of finesse, robustness and quality. The Eleganza Max Wall-Mount can be further enhanced with several accessories such as the Snoot, Pin-hole, Glowing Ring or Hexcell Louver. This product features up and down light with different beam angles.

OPERATIONS & ELECTRICAL

Input Voltage: 120 & 277 Vac
 Dimming: Tri Mode Dimming™ (Triac, ELV & 0-10V)
 Lumens per Watt: 90 LPW at 90 CRI (Standard)
 104 LPW at 83 CRI

DIMENSIONS

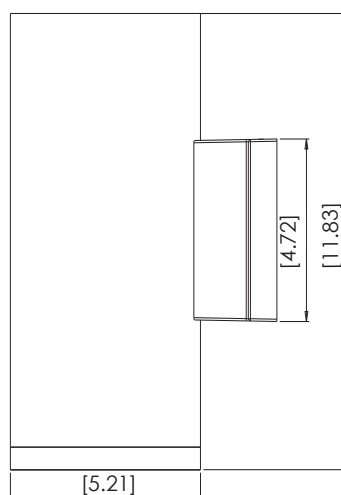

ELEGANZA MAX WALL MOUNT

ORDERING GUIDE

Ordering code example: AE-CYL-EZM-50R12-WM2-50-27-30D30U-P-T-WH

FIXTURE FAMILY	PRODUCT CODE	HEIGHT	MOUNTING METHOD	POWER	CCT	BEAM ANGLE	FINISH*
AE-CYL-EZM EZ Mindoor cylindrical wall mount- ed fixture	-50R	12 12" fixture height	-WM1 Wall Mounting Single Side light, up or down light	-50 25W up & 25W down OR 50W one side 4500 lms	-27 2700K CCT 3,760 lms	[Leave Blank] No downlight No up light 15D 15U 15° down up 30D 30U 30° down up 40D 40U 40° down up 55D 55U 55° down up	-WH White powder coat finish
			-WM2 Wall Mounting Double side light, up and down	*Can be pro- grammed from 19-50 watts	-30 3000K CCT 4,040 lms		-BK Black powder coat finish
					-35 3500K CCT 4,320 lms		-SV Silver powder coat finish
					-40 4000K CCT 4,320 lms		-RALXXXX* Customized finish


* Custom color finish available.
 Please contact us for more information and pricing

BRINGING LIGHT INTO WORKSPACES

Commercial setting heightened to elegant levels

Lights areas for employees to create an environment that is ideal for productivity and increased focus, and mood. With these durable and energy-efficient LED fixtures, ERALUX offers commercial office lights that are available in a range of power and CCT that will provide the ideal brightness and light colour for increased productivity and comfort for workers and clients.



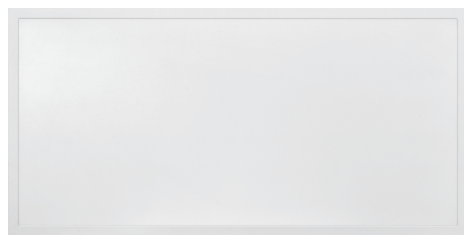

The ALPS Evolve is a backlit panel product designed with optimum LED placement to ensure a uniformly lit diffuser. It features a switchable CCT, and power package enable an endless flexibility at the install site. The average 130 LPW performance also makes the ALPs an ideal replacement for any existing recessed commercial ceiling products.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac / 120-347 Vac

Dimming : 0-10 V external dimming down to 10%

Lumens per Watt : 125 LPW at 80 CRI

Distribution : Lambertian


ORDERING GUIDE

Ordering code example: AE-RC-APB-XXW24-28CDMH-02

FIXTURE FAMILY	POWER	SIZE	CONTROLS	INPUT VOLTAGE
AE-RC-APB ALPS Evolve series commercial office backlit panel	-XXW	22: 2'x2' housing 3,125-3,750-4,375 lumens	-28CDM 0-10V external dimming down to 10%	H-02 120-347V
	2x4: 30-40-50W 2x2: 25-30-35W 1x4: 25-30-35W	24: 2'x4' housing 4,375-5,000-5,625-6,250 lumens	-28CSM Microwave Motion Sensor (*ONLY for 120- 277V*)	L-01 120-277V
	CCT Selectable 3500/4000/5000K	14: 1'x4' housing 3,125-3,750-4,375 lumens		

ALPS EVOLVE

DIMENSIONS

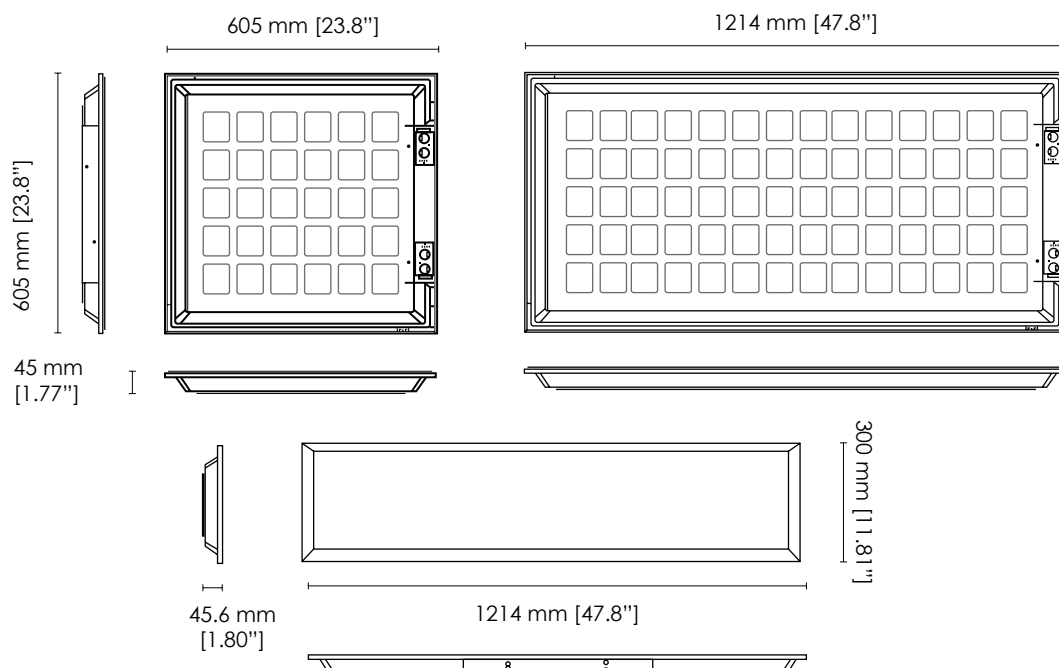



The ALPS HYDRO is a backlit panel product designed with optimum LED placement to ensure a uniformly lit diffuser. It features a switchable CCT, and power package enable an endless flexibility at the install site. Wet rated IP65 from below ceiling line, suitable for wet location, capable of being sprayed from the bottom.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10 V external dimming down to 10%

Lumens per Watt : 125 LPW at 80 CRI

Distribution : Lambertian


ORDERING GUIDE

Ordering code example: PL14-40W-A3C3-M-P

FIXTURE FAMILY	SIZE	POWER	CCT	INPUT VOLTAGE	CONTROLS
PL ALPS Hydro series commercial office backlit panel	22 2'x2' housing	-40W 25/30/40W: Up to 5,000 lumens	-A3C3 CCT selectable: 3500K/4000K/5000K	-M 120-347 V	-P 0-10V Dimming
	24 2'x4' housing	-50W 30/40/50W: Up to 6,250 lumens			
	14 1'x4' housing				

ALPS HYDRO

DIMENSIONS

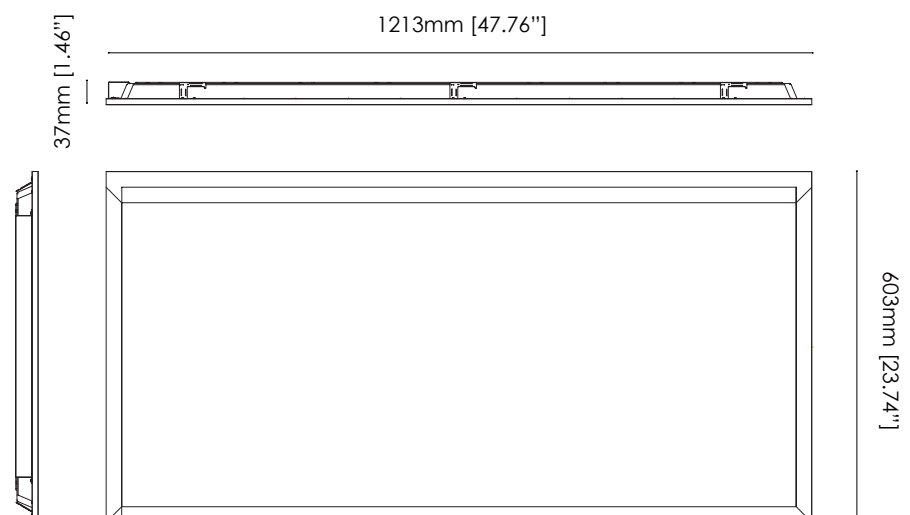

MONT BLANC EVOLVE



The Mont Blanc Evolve is an ideal solution for anyone looking to minimize waste, reduce install time and revitalized the ceiling. This product differentiates itself through its ease of installation and access to maintenance. The Mont Blanc Evolve features a switchable CCT and switchable power levels for the fixture. This enables customization on-site during final installation and provides an unparalleled level of flexibility.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 130 LPW at 80 CRI


Distribution : Lambertian

ORDERING GUIDE

Ordering code example: AE-RC-MBCA22LBN35/40/50010WH

FIXTURE FAMILY	VOLTAGE	SIZE & POWER	DISTRIBUTION	CRI	CCT Selectable	CONTROL	FINISH	OPTIONS
AE-RC-MB ERALUX Mont Blanc EVOLVE recessed commercial office volumetric troffer	CA 120-347V	22 2 x 2 feet 24/30/36 Watts selectable: 3120/3900/4680 lumens selectable	LB 120° Lambertian	N Normal 80 CRI	30/35/40 3000/3500/4000K selectable CCT 35/40/50 3500/4000/5000K selectable CCT	010 0-10V external dimming down to 10% MS1 Motion Sensor EM Emergency Battery Back-up	WH White WH-AR White with Air Return slots	[BLANK] No Option
		24 2 x 4 feet 24/36/45 Watts selectable: 3120/4680/5850 lumens selectable						- AWN Lutron Smart Control (RF only)
								- AWNS Lutron Smart Control with Sensor

DIMENSIONS

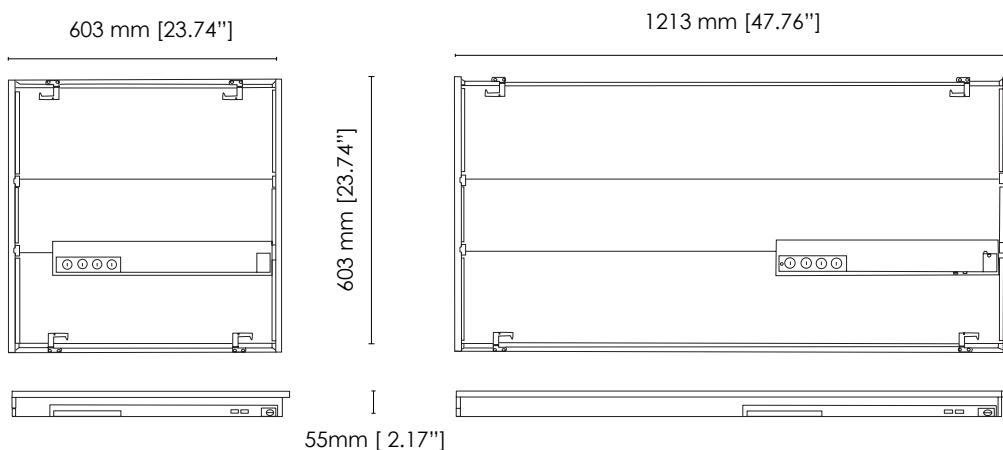



G5 Recessed T-GRID

The G5 T-Grid provides unsurpassed flexibility for commercial offices. With a simple switch, the fixture can switch CCT and lumens. Long seamless rows are possible using custom lengths for the starter, middle and ender. It is perfect for new buildings, upgrades and retrofit projects. This series has been redesigned to be easily mounted on most of T grid's ceilings.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 105 LPW at 80 CRI

Distribution : Lambertian


ORDERING GUIDE

Ordering code example: AE-SF-G5CA44030/35/40010WH-R-A


FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	MOUNTING	TYPE	
AE-SF-G5 ERALUX G5 linear architectural fixture	CA 120-347V		20 20 watts: 2100 lumens	30/35/40 3000/3500 4000K selectable CCT	010 0-10V external dimming down to 10%	WH-GB ERALUX Nebula White	-R- Recessed mounting on T-grids	A Stand alone	
		2 2 feet							
		4 4 feet	40 40 watts: 4200 lumens						B Starter & Ender
		5 5 feet		30/40/50 3000/4000/ 5000K selectable CCT		BK-GB ERALUX Atomic Black Finish			
		6 6 feet	50 50 watts: 5250 lumens						
		8 8 feet							
			70 70 watts: 8400 lumens						

DIMENSIONS



A - Stand alone

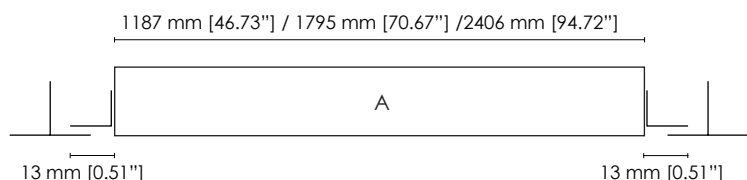

C - Middle

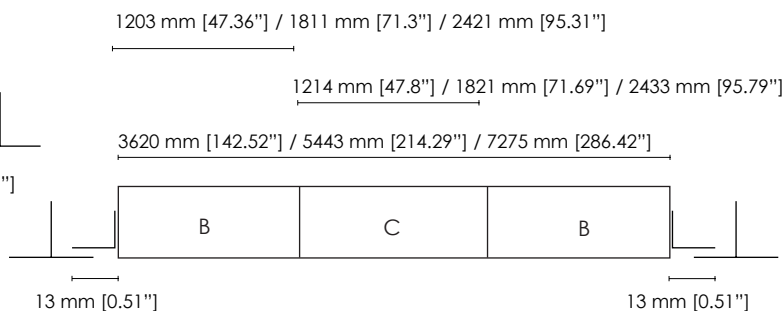

B - Stand & Ender

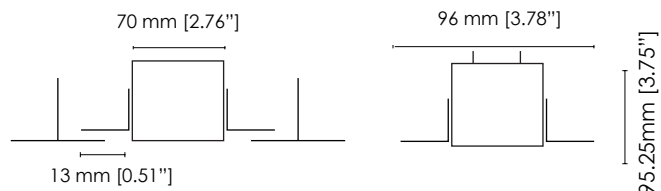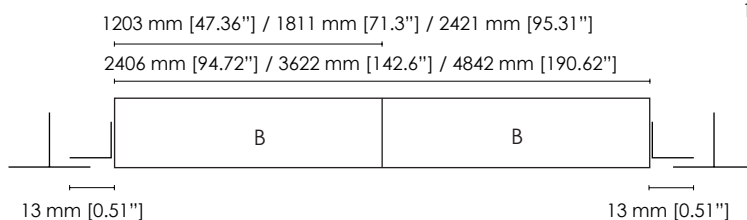



Atlantis is a recessed linear that provides an elegant appearance in any indoor commercial office. The exposed driver and the removable lens makes the installation simple and intuitive. This series has been designed to be mounted into gypsum ceilings or walls.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10 V external dimming down to 10%

Lumens per Watt : 85-89 LPW at 80 CRI

Distribution : Lambertian

ORDERING GUIDE


Ordering code example: AE-SF-ATL35432WH

FIXTURE FAMILY	CCT	LENGTH	POWER	FINISH
AE-SF-ATL ERALUX Atlantis linear architectural fixture – 120-277 V	30 3000K	4 4 feet	32 32 watts: 2720 lumens	WH White Finish
		5 5 feet	40 40 watts: 3400 lumens	
	35 3500K	6 6 feet	46 46 watts: 4080 lumens	BK Black Finish
		8 8 feet	62 62 watts: 5440 lumens	SV Silver Finish
	40 4000K			

Ordering code example: AE-SF-ATL3590L32WH

FIXTURE FAMILY	CCT	SHAPE	POWER	FINISH
AE-SF-ATL ERALUX Atlantis linear architectural fixture – 120-277 V	30 3000K	90L L Shape	32 32 watts: 2720 lumens	WH White Finish
		90N Inner L Shape	40 40 watts: 3400 lumens	
	35 3500K	90W Outer L Shape	46 46 watts: 4080 lumens	BK Black Finish
		T T Shape	62 62 watts: 5440 lumens	SV Silver Finish
	40 4000K	X X Shape		

DIMENSIONS

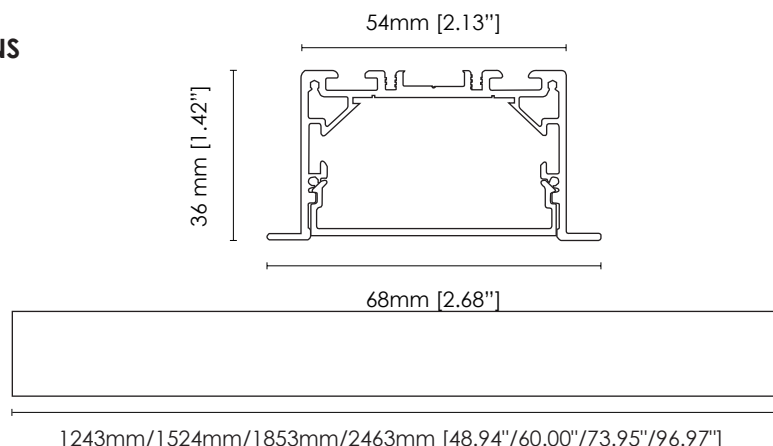

1243mm/1524mm/1853mm/2463mm [48.94\"/>

www.eralux.com



A simple yet effective choice

Seamless and graceful downlights are made to enhance intricacy or complement simplicity.

Available at ERALUX in a variety of lumens, Colour Rendering Index (CRI), CCTs, distribution, adapters, and colour finishes. Adding style and sophistication to any area indoors or outdoors, downlights are great in-ceiling fixtures which allow light to shine down to the desired space. Mainly used for general lighting for an overall space when using a higher beam angle, ERALUX's range of downlights are customizable which allows you to be creative and match with the right ambiance and style as your space. Downlights with a smaller beam angle will create more focused lighting to accentuate specific artworks or architectural designs. With these LED downlights, ERALUX offers products that maximize the light output for less energy.





The SLIMA Series LED downlight is the ideal recessed downlight for any retrofit or new construction project. The spring-action housing clips facilitate the installation process for any power option. The SLIMA downlights have a selectable CCT switch enabling to change the of color projection from 2700K to 5000K, offering an unparalleled level of flexibility. Now available in black and white finish.

OPERATIONS & ELECTRICAL



Input Voltage : 120 Vac

Dimming : Triac dimming

Lumens per Watt : 75 LPW (SLIMA), 83 LPW (HO), 78 LPW (FIRE)

Distribution : Lambertain

ORDERING GUIDE

Ordering code example: AE-DL-SL-04-BK

SLIMA

FIXTURE FAMILY	SHAPE & SIZE	FINISH
AE-DL-SL- ERALUX SLIMA Series recessed downlig Triac dimming 2700K/3000K/3500K/4000K /5000K CCT switchable	04- 4" Round housing 9W:650lms	BK Black Finish
	06- 6" Round housing 14W:1150lms	WH White Finish

Ordering code example: AE-DL-SLHO-04-12W-TRIAC-P2750-WH

SLIMA HO


FIXTURE FAMILY	SHAPE & SIZE	POWER	CONTROLS	CCT	FINISH
AE-DL-SLHO- SLIMA HO Series recessed downlight	04- 4" Round housing	12W- 12W: 1000 lumens	TRIAC- TRIAC Dimming	P2750-	WH White Finish

Ordering code example: AE-DL-SF-04-09W-TRIAC-P2750-BK

SLIMA FIRE

FIXTURE FAMILY	SHAPE & SIZE	POWER	CONTROLS	CCT	FINISH
AE-DL-SF- SLIMA FIRE Series recessed downlight	04- 4" Round housing	09W- 9W: 700 lumens	TRIAC- TRIAC Dimming	P2750- Selectable CCT	BK Black Finish
	06- 6" Round housing	14W- 14W: 1100 lumens			WH White Finish

DIMENSIONS

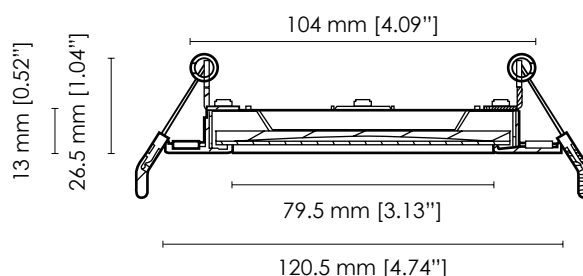



Introducing the VERSA EVOLVE, with its ability to direct light to the right place every time. Its adjustable beam tilts to 25° and the 40° beam angle will light up your spaces with an even higher lumen output. With its five CCT selectable option, the VERSA EVOLVE's versatility will be the perfect downlight for indoors.

OPERATIONS & ELECTRICAL



Input Voltage : 120 Vac

Dimming : Triac dimming 10%-100%

Lumens per Watt : Up to 85 LPW

Beam angle: ~40° Beam Angle & ~25° Tilt Angle

ORDERING GUIDE

Ordering code example: AE-DL-VS-4-12W-TRIAC-P27/30/35/40/50

FIXTURE FAMILY	SHAPE & SIZE	POWER	CONTROLS	CCT
----------------	--------------	-------	----------	-----

VERSA EVOLVE

AE-DL-VS-

ERALUX VERSA Series
recessed downlight

4-

4" Round housing

12W-


12W: 1,000 lumens

TRIAC-

Triac dimming

P27/30/35/40/50

DIMENSIONS

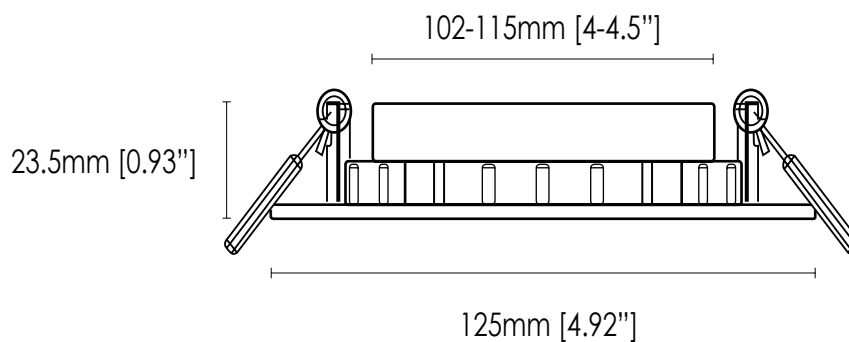



The RING and Double Ring Series are the solution for residences with a light source that provides a seamless transition to various spaces.

OPERATIONS & ELECTRICAL

Input Voltage : 120 Vac

Dimming : Triac dimming

Lumens per Watt : 80 LPW at 80 CRI

Beam angle: 120°

ORDERING GUIDE

Ordering code example: AE-DL-RG-11-16W-82750-TRIAC

RING

FIXTURE FAMILY	SHAPE & SIZE	POWER	CRI & CCT	CONTROLS
AE-DL-RG ERALUX Ring Series surface mounted downlight	-11 11" round	-16W 16 watts: 1246 lumens	-82750 80 CRI CCT Switchable 2700/3000/3500/4000/5000K	-TRIAC Triac Dimming
	-13 13" round	-20W 20 watts: 1448 lumens		
	-15 15" round	-24W 24 watts: 1815 lumens		


ORDERING GUIDE

Ordering code example: AE-DL-DR-12-16W-82750-TRIAC

DOUBLE RING

FIXTURE FAMILY	SHAPE & SIZE	POWER	CRI & CCT	CONTROLS
AE-DL-RG ERALUX Ring Series surface mounted downlight	-12 12" round	-16W 16 watts: 1117 lumens	-82750 80 CRI CCT Switchable 2700/3000/3500/4000/5000K	-TRIAC Triac Dimming
	-14 14" round	-20W 20 watts: 1450 lumens		
	-16 16" round	-24W 24 watts: 1772 lumens		

DIMENSIONS

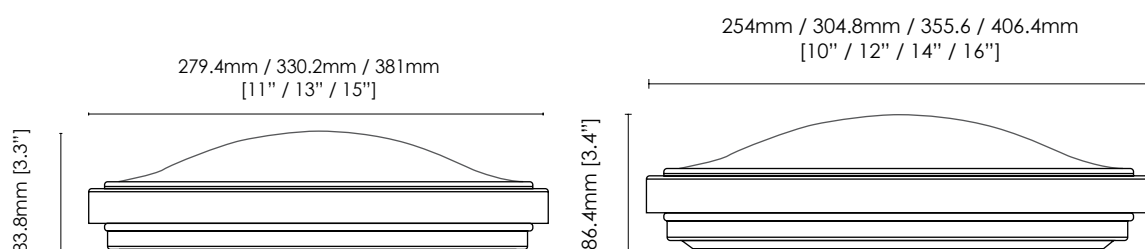



The DISCO Series is the ideal solution for residences with a light source that provides a seamless transitions to various spaces. It comes in two different wattage and size options as in the 21W for 12 inch and 25W for 15 inch. This fixture also offers various CCT options of 2700K, 3000K, 3500K, 4000K and 5000K CCT that can be set in the field.

OPERATIONS & ELECTRICAL



Input Voltage : 120-277 Vac

Dimming : 0-10 V

Lumens per Watt : 80-85 LPW at 90 CRI

Distribution : 120°

ORDERING GUIDE


Ordering code example: AE-DL-DS12-21WUVPXX

FIXTURE FAMILY	SHAPE & SIZE	INPUT VOLTAGE	CRI	FINISH
AE-DL-DS ERALUX Disco Series downlight	5-9W 5 inch 9 Watts 700 lumens	UV 120-277 V	P Premium 90 CRI: 2700/3000 3500/4000/5000	[BLANK] White finish -BK Black finish
	7-14W 7 inch 14 Watts 1,200 lumens			
	9-17W 9 inch 17 Watts 1,400 lumens			
	12-21W 12 inch 21 Watts 1,800 lumens			
	15-25W 15 inch 25 Watts 2,000 lumens			

DISCO

DIMENSIONS

(Ex: 5" Size)

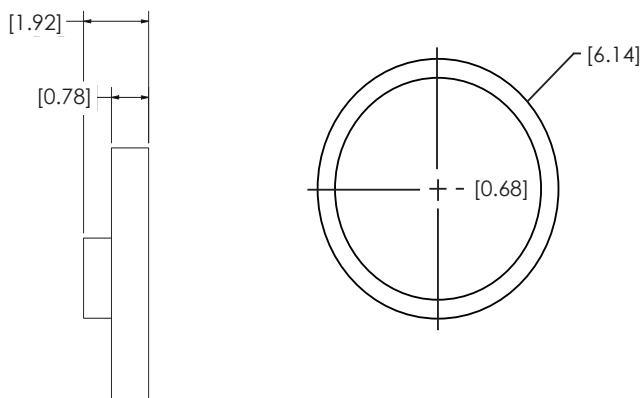



The DISCO ECO Series is the ideal solution for residences with a light source that provides a seamless transitions to various spaces. It comes in five different wattage and size options. This fixture also offers various CCT options of 2700K, 3000K, 3500K, 4000K and 5000K CCT that can be set in the field.

OPERATIONS & ELECTRICAL



Input Voltage : 120 Vac

Dimming : Triac

Lumens per Watt : 80-85 LPW at 80 CRI

Distribution : 120°

ORDERING GUIDE

Ordering code example: : AE-DL-DSE12-21W-12-2750


FIXTURE FAMILY	SHAPE & SIZE	INPUT VOLTAGE	CCT	FINISH
AE-DL-DSE Disco Eco Series Downlight	5-9W 5 inch 9 Watts 700 lumens	-12 120 V	-2750 CCT selectable: 2700/3000 3500/4000/5000	[BLANK] White finish -BK Black finish
	7-14W 7 inch 14 Watts 1,200 lumens			
	9-17W 9 inch 17 Watts 1,400 lumens			
	12-21W 12 inch 21 Watts 1,800 lumens			
	15-25W 15 inch 25 Watts 2,200 lumens			

DIMENSIONS

[0.78]



[6.14]





The Artista 347 EVOLVE Series LED downlight is the ideal recessed downlight for any retrofit or new construction project. Its voltage rating of 120-347V makes it highly suitable for Canadian and American markets. The spring-action housing clips simplify the installation process for six- and eight-inch sizes. The Artista 347 EVOLVE separates itself from competitor downlights by having selectable lumens, and CCT switches, enabling high flexibility at the project location.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%


Lumens per Watt : 83 LPW at 90 CRI

ORDERING GUIDE

Ordering code example: AE-DL-ATE-CA6-12-17.5WT-010-P30/35/40/50

FIXTURE FAMILY	VOLTAGE	SHAPE & SIZE	POWER	CONTROL	CCT
AE-DL-ATE- ERALUX Artista 347 EVOLVE recessed downlight	CA 120-347V 50/60Hz	6- 6" Round housing	12-17.5WT- 12/17.5W: 1,000/1,500lm Selectable	010- 0-10V External dimming down to 10%	P30/35/40/50 3000K/3500K/ 4000K/5000K Selectable CCT
		8- 8" Round housing	18-24WT- 18/24W: 1,500/2,000lm Selectable		
			21-32WT- 21/32W: 2,000/3,000lm Selectable		

DIMENSIONS

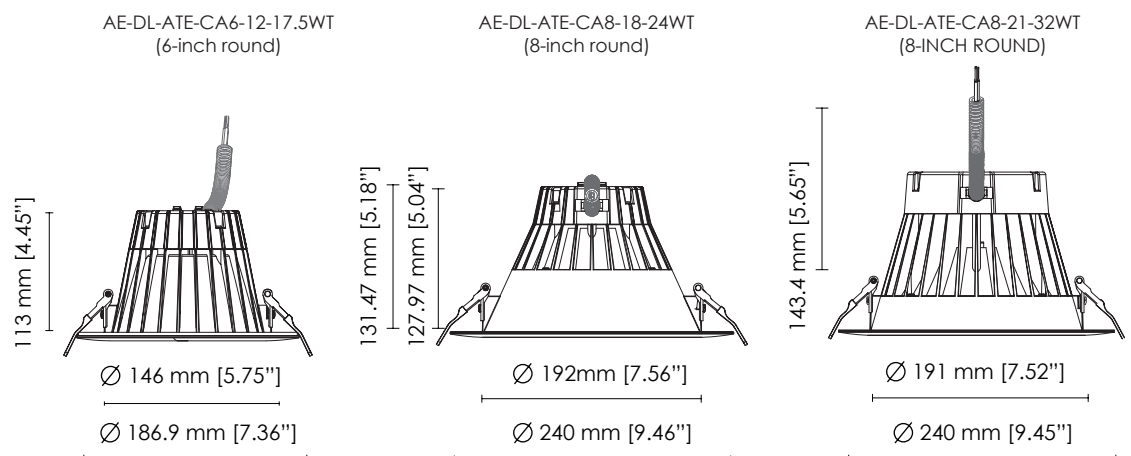



The TANGO series is the 6- and 8-inch commercial downlight family from ERALUX. This downlight features a spring mechanisms that makes installation a breeze. It is perfect for retrofit and for new constructions environment (junction box or frame kit required). The 6 inches can achieve up to 1500 lumens while the 8 inch can achieve 2500 lumens at 90 CRI, 3000K. The TANGO Series separates itself from competitor downlights by having selectable lumens, and CCT switches, enabling high flexibility at the project location.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V

Lumens per Watt : 75-85 LPW at 90 CRI


Distribution : Lambertian

ORDERING GUIDE

Ordering code example:AE-DL-TGE-6-20W-D-P2750-WH

FIXTURE FAMILY	SIZE	POWER	CONTROLS	CRI	CCT	REFLECTOR FINISH
AE-DL-TGE ERALUX Tango Series downlight	-6 6 inch	-20W 20 Watts 12-15-20W Selectable Power. 1000-1500-2000 Lms	-D 0-10V dimming	-P Premium 90 CRI	2750 2700K/3000K/3500K/ 4000K/5000K Selectable CCT	-WH White Finish
	-8 8 inch	-30W 30 Watts 20-25-30W Selectable Power. 1500-2000-2500 Lms				

DIMENSIONS

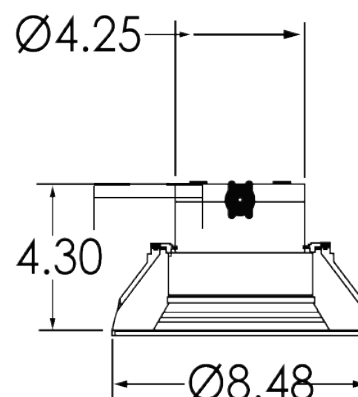



The TANGO X series is a commercial downlight family from ERALUX. This downlight features a spring mechanism that makes installation a breeze. It is perfect for retrofit and for new construction environment (junction box or frame kit required). The TANGO Series separates itself from competitor downlights by having selectable lumens, and five CCT switches, enabling high flexibility at the project location, it comes in three sizes; 4, 6, and 8 inches.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V dimming

Lumens per Watt :

90-93 LPW for 4" and 6"

86 LPW for 8" at 90 CRI

Beam angle: Lambertian (95° beam angle)

ORDERING GUIDE


Ordering code example: AE-DL-TGX-CA-6-18W-010-92750-WH

FIXTURE FAMILY	VOLTAGE	SIZE	POWER	CONTROLS	CRI	CCT	FINISH
----------------	---------	------	-------	----------	-----	-----	--------

TANGO X

AE-DL-TGX ERALUX Tango X Series downlight	-CA 120-347V	-4 4 inch	-15W 7/11/15W Selectable Power 650/1023/1395 Lm At 4000K	-010 0-10V dimming	-9 90 CRI	2750 CCT switchable 27/30/35/40/50K	-WH Matte White Finish trim and reflector
			-18W 10/14/18W Selectable Power 930/1302/1670 Lm At 4000K				
		-6 6 inch	-30W 18/24/30W Selectable Power 1548/2064/2580 Lm At 4000K				
		-8 8 inch					

DIMENSIONS

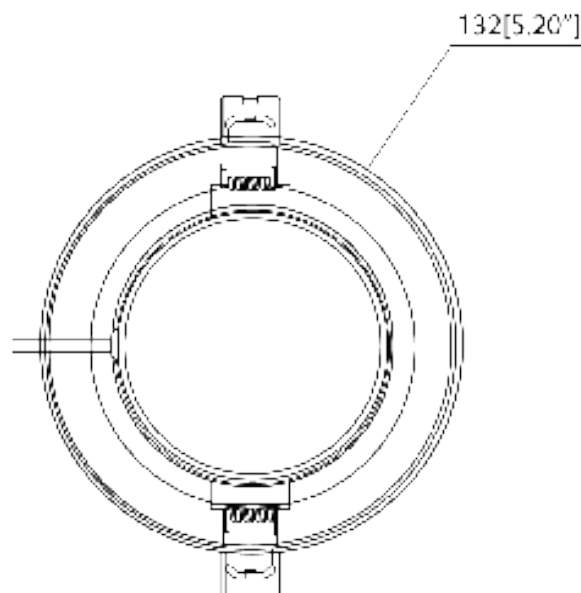







The Infinita EVOLVE Series LED downlight is the ideal solution for a high-end finish to the ceiling space. Driven to provide ultimate customization on-site, the Infinita offers possibilities beyond the normal downlight in terms of flexible lumens output and flexible CCT adjustments. The Infinita comes with two possible reflector finishes to enable further customizations.

OPERATIONS & ELECTRICAL



Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 63-88 LPW at 90 CRI


Beam angle: 90°

ORDERING GUIDE

Ordering code example: AE-DL-IF-04-11W-010-P3050-WH

FIXTURE FAMILY	SHAPE & SIZE	POWER	CONTROLS	CRI & CCT	REFLECTOR FINISH
AE-DL-IF- ERALUX Infinita EVOLVE recessed downlight	04- 4" Round housing	11W- 8/10/11 watt: 650/750/850 lumen – White reflector 500/600/700 lumen – Matt reflector	010- 0-10V external dimming down to 10%	P3050 90 CRI 3000K, 3500K, 4000K, 5000K	-WH White smooth cone reflector with white flange -SD Semi Diffused smooth cone reflector with white flange

DIMENSIONS

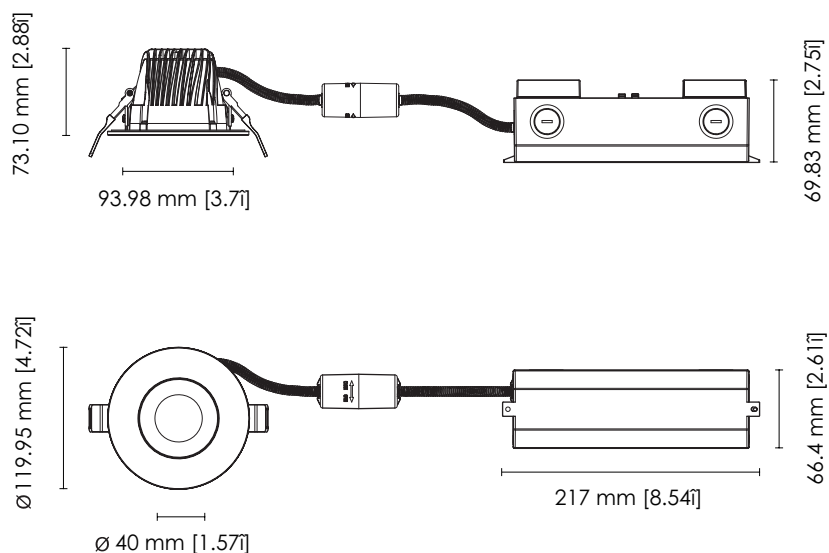



The Infinita EVOLVE Series LED downlight is the ideal solution for high end finish to the ceiling space. Driven to provide customization on site, the Infinita offers possibilities beyond the normal downlight in terms of flexible lumens output and flexible CCT adjustments. With a 5000 lumens output at 90 CRI, the Infinita presents itself as an opportunity to redefine high ceilings across the commercial spaces.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 84 LPW at 90 CRI


Beam angle: 90°

ORDERING GUIDE

Ordering code example: AE-DL-IF-08-59W-010-P3050-WH

FIXTURE FAMILY	SHAPE & SIZE	POWER	CONTROLS	CRI & CCT	REFLECTOR FINISH
AE-DL-IF- ERALUX Infinita EVOLVE recessed downlight	08- 8" Round housing	59W- 34/46/59 watt: 3000/4000/5000 lumen White reflector	010- 0-10V external dimming down to 10%	P3050 90 CRI 3000K, 3500K, 4000K, 5000K	-WH White smooth cone reflector with white flange

DIMENSIONS

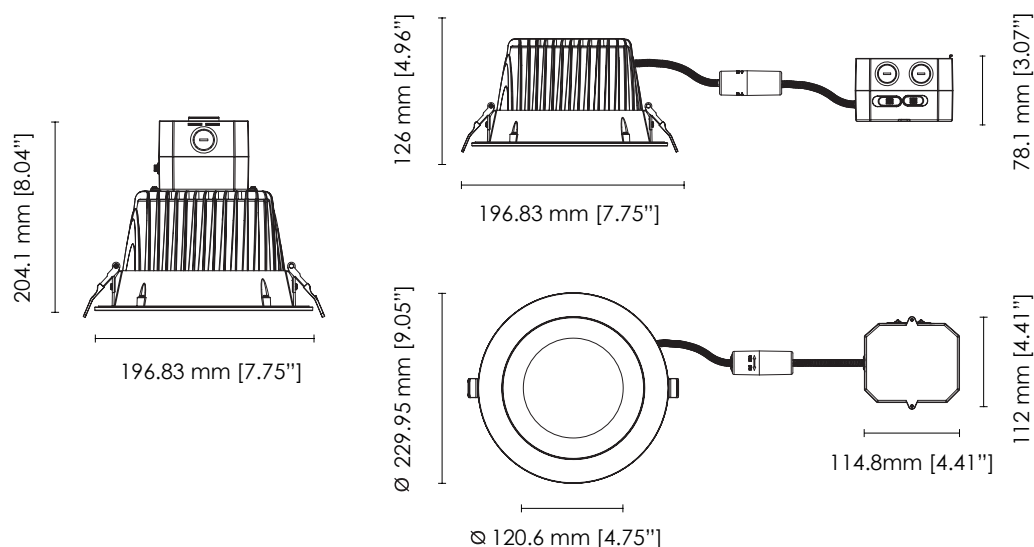

INFINITA EVOLVE 8"



The KINETA Series LED downlight are the ideal recessed downlight for any retrofit or new construction project. The spring-action housing clips facilitates the installation processes. The KINETA separates itself from competitor downlights by having super modular design with round and square, adjustable and fixed options. Replacing LED module, mounting ring, beam lens and reflectors with no need of tools.

KINETA

KINETA MINI

KINETA NANO

OPERATIONS & ELECTRICAL




Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming & Triac Dual dimming

Lumens per Watt : 80 LPW at 90 CRI

Beam angle: 15°, 24°, 38°, 55°

DIMENSIONS

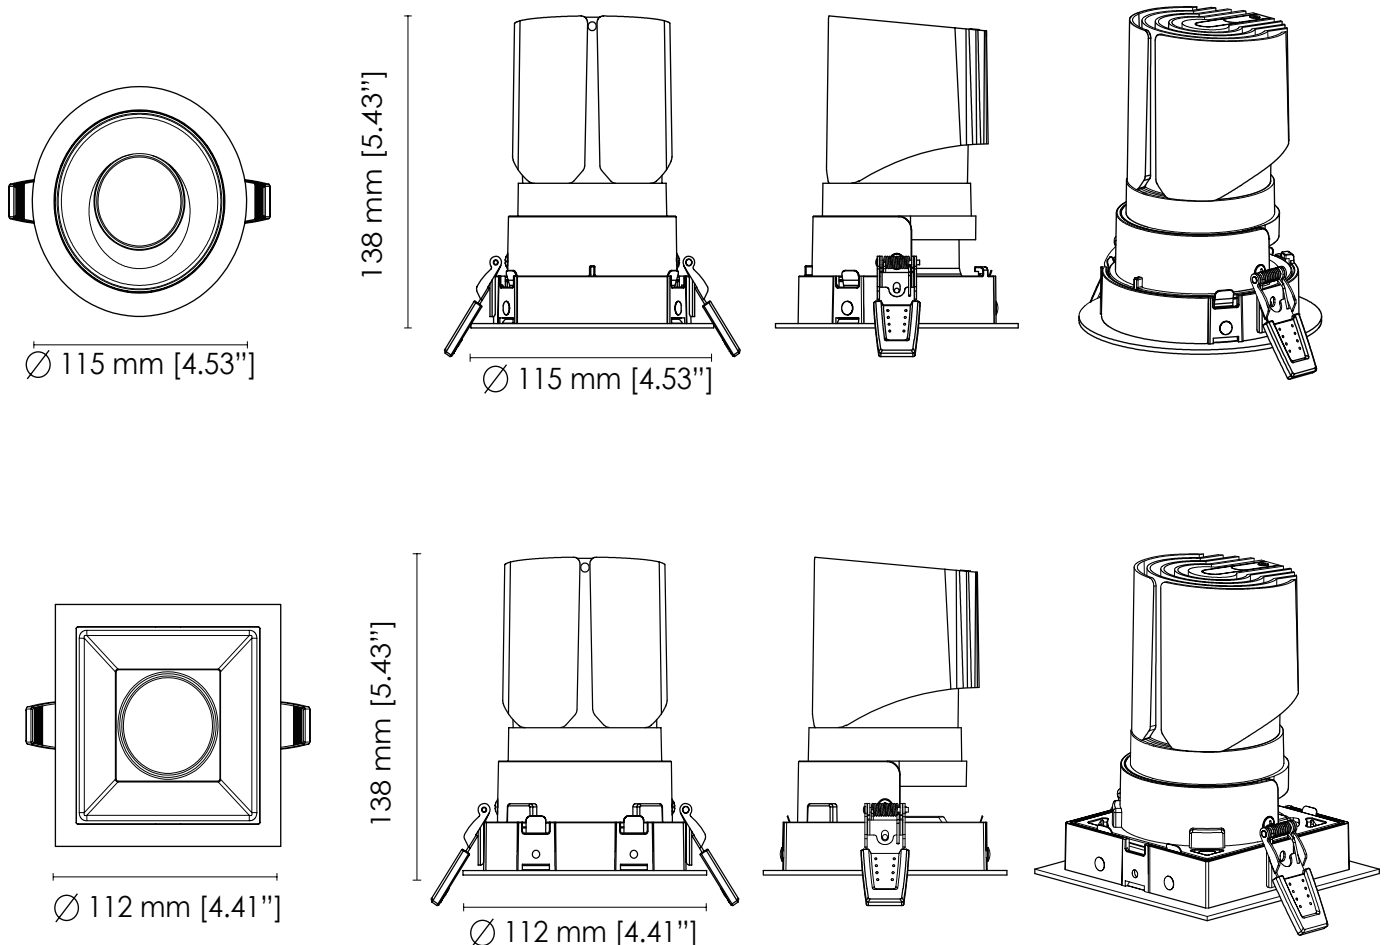

ORDERING GUIDE

Ordering code example: AE-DL-KN-4-RA1BK-UV-25W-X-30-15-WHT

FIXTURE FAMILY	DIMENSION	SHAPE & SIZE	REFLECTORS	INPUT VOLTAGE	POWER	CONTROLS	CCT	BEAM ANGLE	TRIM
AE-DL-KN ERALUX KINETA Series recessed downlight	-4 4 inches	-RA1 Round Adjustable	BK Black	-UV 120-277 V	-20W 20 watts; 1600 lumens	-X 0-10V external dimming & Triac Dual dimming	-27 2700K CCT	-15 15° Beam angle	-WHT White Trim -BKT Black Trim
		-SA1 Square Adjustable	WH White		-30 3000K CCT		-24 24° Beam angle		
		-RF1 Round Fixed	SP Specular bright silver		-35 3500K CCT		-38 38° Beam angle		
		DF Diffused matt silver	-25W 25 watts; 2450 lumens		-40 4000K CCT		-55 55° Beam angle		

ORDERING GUIDE (MINI)

Ordering code example: AE-DL-KN-3-RA1BK-UV-10W-X-27-15-WHT

FIXTURE FAMILY	DIMENSION	SHAPE & SIZE	REFLECTORS	INPUT VOLTAGE	POWER	CONTROLS	CCT	BEAM ANGLE	REFLECTOR FINISH
AE-DL-KN ERALUX KINETA Mini Series recessed downlight	-3 3 inches	-RA1 Round Adjustable	WH White	-UV 120-277V	-10W 10 watts; ~800 lms at 3000K and 38° beam angle for round adjustable reflector	-X 0-10V external dimming & Triac Dual dimming	-27 2700K	-15 15° Beam angle	-WHT White Trim
		-SA1 Square Adjustable	BK Black				-30 3000K	-24 24° Beam angle	-BKT Black Trim
		-RF1 Round Fixed	SP Specular bright silver				-35 3500K	-38 38° Beam angle	-BK-TL Black Trimless Finish
		DF Diffused matt silver	-40 4000K				-55 55° Beam angle	-WH-TL White Trimless Finish	

ORDERING GUIDE (NANO)

Ordering code example: AE-DL-KN-2-RA1BK-UV-5W-X-27-15-WHT

FIXTURE FAMILY	DIMENSION	SHAPE & SIZE	REFLECTORS	INPUT VOLTAGE	POWER	CONTROLS	CCT	BEAM ANGLE	REFLECTOR FINISH
AE-DL-KN ERALUX KINETA Nano Series recessed downlight	-2 2 inches	-RA1 Round Adjustable	WH White	-UV 120-277V	-5W 5 watts; ~332 lms at 3000K and 38° beam angle for round adjustable reflector	-X 0-10V external dimming & Triac Dual dimming	-27 2700K	-15 15° Beam angle	-WHT White Trim
			BK Black		-30 3000K		-24 24° Beam angle	-BKT Black Trim	
			SP Specular bright silver		-35 3500K		-38 38° Beam angle	-BK-TL Black Trimless Finish	
			DF Diffused matt silver		-40 4000K		-55 55° Beam angle	-WH-TL White Trimless Finish	



The GUARDIANS series is the 4 , 5 and 6-inch commercial downlight family from ERALUX. This downlight features a spring mechanisms that makes installation a breeze. It is perfect for retrofit and for new constructions environment. The 4 inches can achieve up to 2500 lumens, 5 inches can achieve up to 3600 lumens and the 6 inches can achieve up to 4300 lumens at 90 CRI, 3000K. The GUARDIANS Series separates itself from competitor downlights by having selectable lumens, CCT switches, and magnetic reflector enabling high flexibility at the project location.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming & Triac dimming


Lumens per Watt : 110 LPW at 90 CRI

ORDERING GUIDE

Ordering code example: AE-DL-GR-4-UV-20W-WH-XP2724BK

FIXTURE FAMILY	SIZE	INPUT VOLTAGE	POWER	REFLECTOR FINISHES	CONTROL	CCT	BEAM ANGLE	FIANGE FINISH			
AE-DL-GR ERALUX Guardians Series Led commercial downlight	-4 4 inches	-UV 120-277V	-20W 1694 lumens	-WH White -BK Black -GD Gold -DF Diffused matt silver -SP Specular bright silver	-X Dual dimming	P27 2700k CCT At 90 CRI	24 24° Beam angle	BK Black Finish WH White Finish			
			-25W 2190 lumens								
	-5 5 inches	-UV 120-277V	-20W 1694 lumens			P30 3000k CCT At 90 CRI	38 38° Beam angle				
			-25W 2190 lumens								
			-30W 2441 lumens								
	-6 6 inches	-UV 120-277V	-35W 3016 lumens			P35 3500k CCT At 90 CRI	60 60° Beam angle				
			-20W 1694 lumens								
			-25W 2190 lumens								
			-30W 2441 lumens			P40 4000k CCT At 90 CRI	60 60° Beam angle				
			-35W 3016 lumens								
			-40W 3600 lumens								
			-45W 4056 lumens			P50 5000k CCT At 90 CRI					

DIMENSIONS

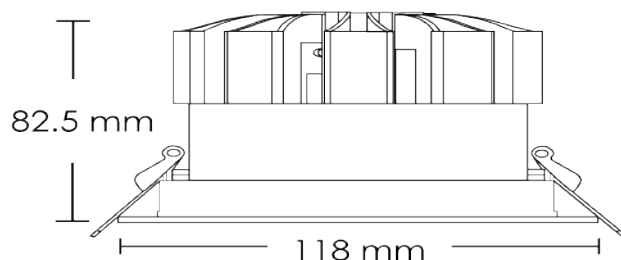



UNA provides an elegance and flexibility that is set to provide the ultimate lighting environments. The series come with UNA, DUA and TRIA category light heads that feature light engines ranging from 10W to 50W. This fixture also comes standard with 0-10V as well as phase dimming enabling the electrician freedom of choice for controls. Further, the spring mechanisms enables a fast installation.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming & Triac Dual dimming

Lumens per Watt : 80 LPW at 90 CRI at 3000K


Beam angle: 15°, 24°, 38°, 55°

ORDERING GUIDE

Ordering code example: AE-DL-UNA-4-35-24-UV-20W-X

FIXTURE FAMILY	DIMENSION	SHAPE	CCT	BEAM ANGLE	INPUT VOLTAGE	POWER	CONTROL	FINISH
AE-DL-UNA UNA Series	-3 3 inches Comes with AE-DL-KN-3-SA5	[BLANK] Square	-30 3000K	-15 15° Beam angle	-UV 120-277V	-10W 10 watts 800 lumens	-X Dual dimming	[BLANK] White -BKT Black
	-4 4 inches Comes with AE-DL-KN-4-SA3	R Round	-35 3500K	-24 24° Beam angle		-15W 15 watts 1,200 lumens		
			-38 38° Beam angle	-38 38° Beam angle		-20W (4 inch only) 20 watts 1,800 lumens		
			-40 4000K	-55 55° Beam angle		-25W (4 inch only) 25 watts 2,200 lumens		

DIMENSIONS

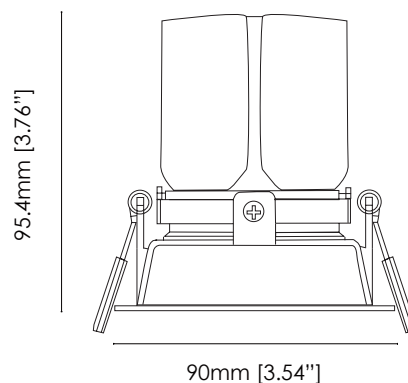



DUA provides an elegance and flexibility that is set to provide the ultimate lighting environments. The series come with UNA, DUA and TRIA category light heads that feature light engines ranging from 10W to 50W. This fixture also comes standard with 0-10V as well as phase dimming enabling the electrician freedom of choice for controls. Further, the spring mechanisms enables a fast installation.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming & Triac Dual dimming

Lumens per Watt : 80 LPW at 90 CRI at 3000K


Beam angle: 15°, 24°, 38°, 55°


ORDERING GUIDE

Ordering code example: AE-DL-DUA-4-35-24-UV-50W-X

FIXTURE FAMILY	DIMENSION	CCT	BEAM ANGLE	INPUT VOLTAGE	POWER	CONTROLS	FINISH
AE-DL-DUA DUA Series Multi-heads	-3 3 inches (2x10W) (2X15W) Comes with AE-DL-KN-3- SA5	-27 2700K	-15 15° Beam angle	-UV 120-277V	-20W 20 watts (2X10W) 1,600 lumens	-X 0-10V external dimming & Triac Dual dimming	[BLANK] White Trim
	-30 3000K	-24 24° Beam angle	-30W 30 watts (2X15W) 2,400 lumens				
	-4 4 inches (2x20W) (2x25W) Comes with AE-DL-KN-4- SA3	-35 3500K	-38 38° Beam angle		-40W 40 watts (2X20W) 3,600 lumens		
	-40 4000K	-55 55° Beam angle	-50W 50 watts (2X25W) 4,400 lumens				

DIMENSIONS

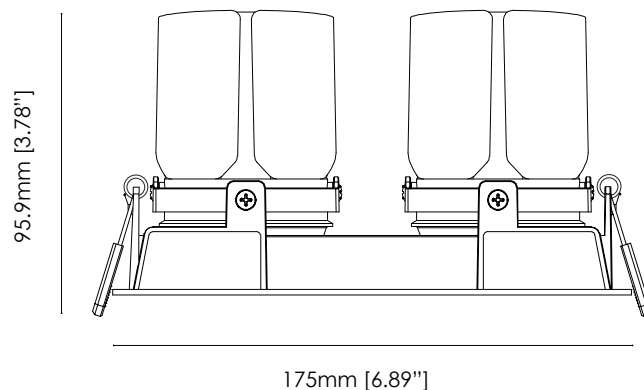

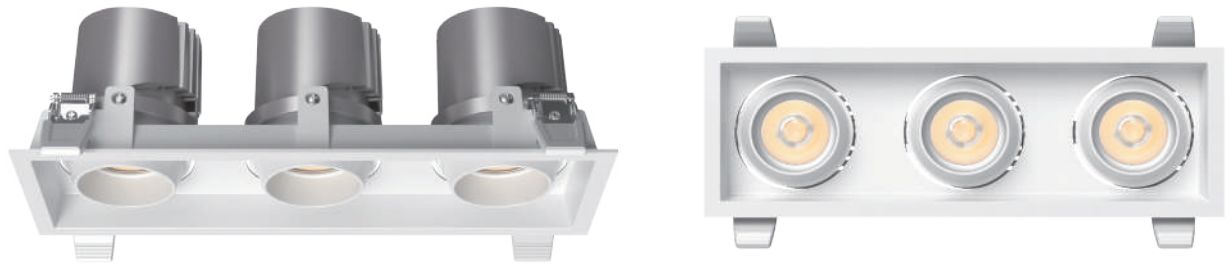

TRIA provides an elegance and flexibility that is set to provide the ultimate lighting environments. The series come with UNA, DUA and TRIA category light heads that feature light engines ranging from 10W to 50W. This fixture also comes standard with 0-10V as well as phase dimming enabling the electrician freedom of choice for controls. Further, the spring mechanisms enables a fast installation.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming & Triac Dual dimming

Lumens per Watt : 80 LPW at 90 CRI at 3000K


Beam angle: 15°, 24°, 38°, 55°

ORDERING GUIDE

Ordering code example: AE-DL-TRIA-3-35-24-UV-30W-X

FIXTURE FAMILY	DIMENSION	CCT	BEAM ANGLE	INPUT VOLTAGE	POWER	CONTROL	FINISH
AE-DL-TRIA TRIA Series	-3 3 inches	-30 3000K	-15 15° Beam angle	-UV 120-277V	-30W (3X10W) 2,400 lumens	-X Dual dimming	[LEAVE BLANK] White Trim
			-24 24° Beam angle				
			-35 3500K				
			-38 38° Beam angle				
			-40 4000K				
			-55 55° Beam angle		-45W (3X15W) 3,600 lumens		-BKT Black Trim

DIMENSIONS

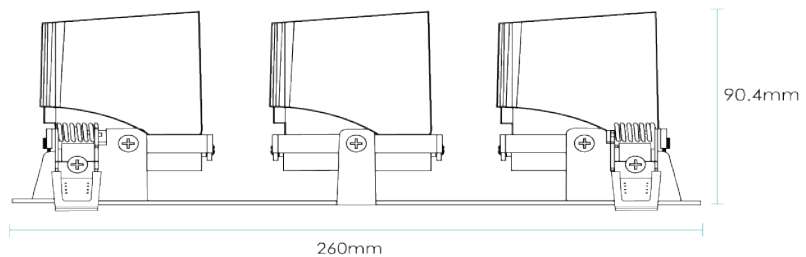



A beautiful office is a sanctuary for productivity and creativity, thoughtfully designed to inspire and energize those who work. Large, ceiling-high windows line the walls, allowing streams of sunlight to flood the space. The light creates a warm and inviting atmosphere. To complement the natural light, the office is equipped with a carefully curated selection of LED lighting.

Sleek, modern LED fixtures are strategically placed to ensure an even distribution of light without causing glare or harsh shadows. Soft, ambient bulbs provide focused lighting for individual tasks, adding a touch of personalization to each workspace. The combination of natural and LED lighting creates a harmonious balance, reducing eye strain and promoting overall well-being.

With every detail crafted to elevate working experience, this office room is more than just a space—it's a catalyst for inspiration, productivity, and unparalleled comfort.



In this space, simplicity reigns supreme, yet every element speaks volumes. It's a testament to the art of design, where every choice, has been made with utmost care and consideration. This office is not just a place to work; it is a place where one can thrive.



BRIGHT OPTIONS TO LIGHTEN EVERY INDUSTRIAL SETTING

Durable lighting that offers a variety of brightness and mounting options in the industrial setting.

Bright, clear, and comforting luminous LED light fixtures are designed for industrial settings with high ceilings. ERALUX's industrial category offers a wide range of fixtures made for tough conditions such as factories, warehouses, and commercial garages. Providing a complete selection of power, sizes, CCT and controls, ERALUX's industrial LED lights are sure to enhance your space. The leading LED technologies minimize long-term energy costs.

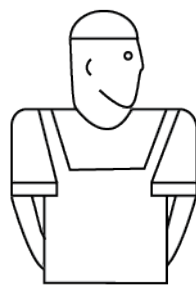

Industrial



The SB2 features a 135 LPW performance made possible with the die-cast aluminum design. It comes standard with the ability to upgrade to integrate motion sensors in the field. The SB2 comes standard with CCT and Lumens Switchable capability; an ideal solution for warehouses, and retail stores.

SB2

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10Vdimming

Lumens per Watt : 150 LPW at 80 CRI


Beam angle: 110°

ORDERING GUIDE

Ordering code example: AE-TL-SB2-CA-150W-110-H

FIXTURE FAMILY	POWER	BEAM ANGLE	PERFORMANCE	MOUNTING	SPECIALTY	CONTROLS
AE-IL-SB2-CA ERALUX Saber Evolve Series industrial fixtures round high bay	-150W 150/125/100 Watts; Up to 22,500 lumens	-110 110 degrees	-H High Performance 3500K/4000K/5000K CCT Switchable	[BLANK] Hook mount -PM Pole mount	[BLANK] Standard -NAT Frosted lens and stainlesssteel hardware	[BLANK] 0-10V dimming -(MS) Motion Sensor
	-240W 240/200/150 Watts; Up to 36,000 lumens					
	-300W 300/240/200 Watts; Up to 45,000 lumens					

DIMENSIONS

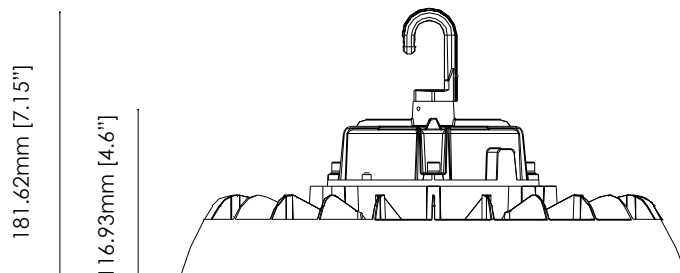



The SB3 is the latest addition by ERALUX to its strong portfolio of highbay fixtures with a white finish. This series features a 145 LPW performance made possible with the die cast aluminum design. It comes standard with the ability to upgrade to integrate motion sensor in the field. The SB3 comes standard with CCT and Lumens Switchable capability; an ideal solution for warehouses, retail stores.

OPERATIONS & ELECTRICAL



SB3


Input Voltage : 120-347 Vac
 Dimming : 0-10V dimming
 Lumens per Watt : 145 LPW at 80 CRI
 Beam angle: 90°

ORDERING GUIDE

Ordering code example: AE-IL-SB3-CA-240W-90-3550-HK1-WH

FIXTURE FAMILY	POWER	LIGHT EMITTING ANGLE	CCT	MOUNTING	CONTROLS	FINISH
AE-IL-SB3-CA SB3 Series industrial fixtures round high bay	-150W 150/120/85 Watts; Up to 22,000 lumens	-90 90-degree light emitting angle	-3550 High Performance 3500K/4000K/5000K CCT Switchable	-HK1 Hook mount	[BLANK] 0-10V dimming	-WH White
	-240W 240/190/140 Watts; Up to 35,000 lumens			-PM* Pole mount		
					-MS Motion Sensor	

DIMENSIONS

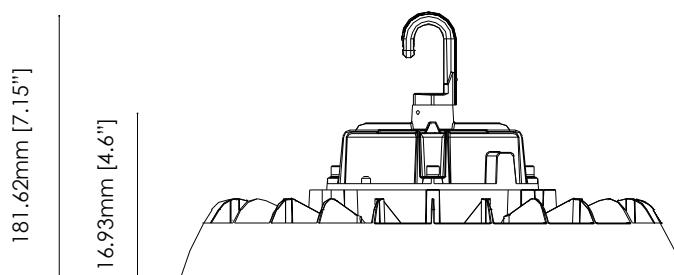



The LMT industrial luminaire is made of robust materials that can withstand tough environments. Its high lumen efficacy and various power and CCT variations allow it to stand out. The LMT comes standard with IP65, IK08 and NSF ratings making it the prime solution for harsh conditions environment.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0 -10V external dimming down to 10%

Lumens per Watt : 150 LPW at 80 CRI

Beam angle: 90°

ORDERING GUIDE


Ordering code example: AE-IL-LMT-500W-D-3050-CA-BK

FIXTURE FAMILY	POWER	CONTOL	CCT	VOLTAGE	FINISH	MOUNTING
----------------	-------	--------	-----	---------	--------	----------

LMT

AE-IL-LMT ERALUX Lumina T industrial fixtures round high bay	-500/400/300W Power switchable 300/400/50W Lumen Switchable 45000/60000/75000lm	-D 0-10V dimming	-3050 CCT Switchable 30/40/50K	-CA 120-347V	-BK Black	[BLANK] Hook mount
		-MS Microwave motion sensor				-CH Suspended chain mount
		-EM Emergency battery back up			-WH White	-U U-Bracket mount

DIMENSIONS

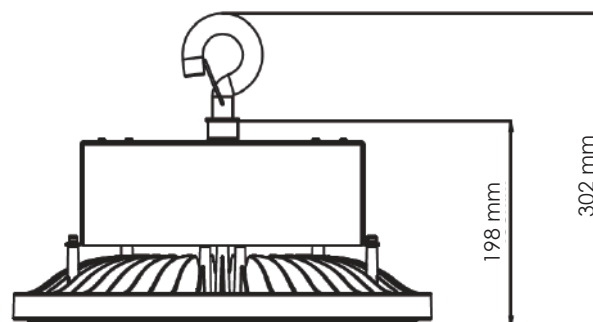



The TT2 is the ultimate solution for warehousing enabling a range of applications due to the switchable lumens package, CCT and a rotatable light engine. The rotatable light engine enables the creation of specific light distribution on site to adapt to the specific applications. Efficient, powerful, versatile.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 135 LPW at 80 CRI


Beam angle: 90°

ORDERING GUIDE

Ordering code example: AE-IL-TT2-CA2FT225W-D-3550K

FIXTURE FAMILY	VOLTAGE	SIZE	POWER	CONTROLS	CCT
AE-IL-TT2 ERALUX Titan ELITE industrial fixtures rectangular high bay	-CA 120-347V input voltage range	2FT 2 feet length	225W 225 watts: 30,375 lumens 225/165/120W	-D 0-10V dimming down to 10%	-3550K 3500/4000/5000K CCT Switchable
		4FT 4 feet length	300W 300 watts: 40,500 lumens 300/225/165W		
				-MS Motion Sensor	

DIMENSIONS

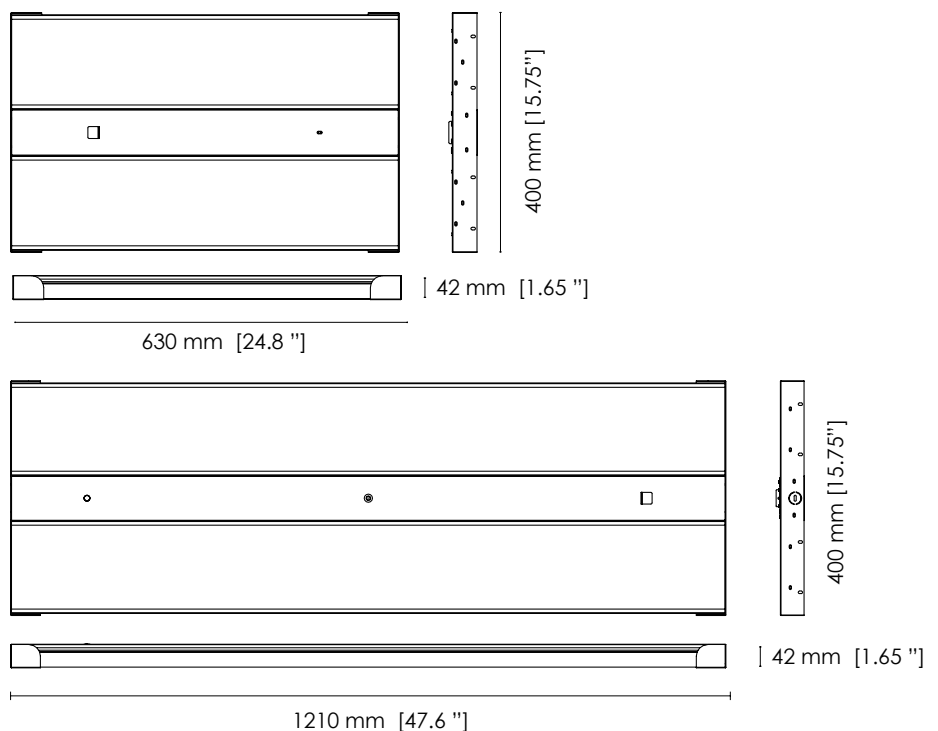



TR industrial fixture is a linear high-bay series. It is offered in several sizes and has several mounting methods to suit your project space. One of the distinctive features of this fixture is the use of aluminum extrusions in order to offer the maximum surface area for the heatsinking of the led arrays. This ensures a longer lifetime of the fixture while enabling a higher performance.

OPERATIONS & ELECTRICAL


Input Voltage : 120-277 Vac, 347-480 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 140-150 LPW at 80 CRI

Beam angle: 90°, 120°, 50x90°

DIMENSIONS

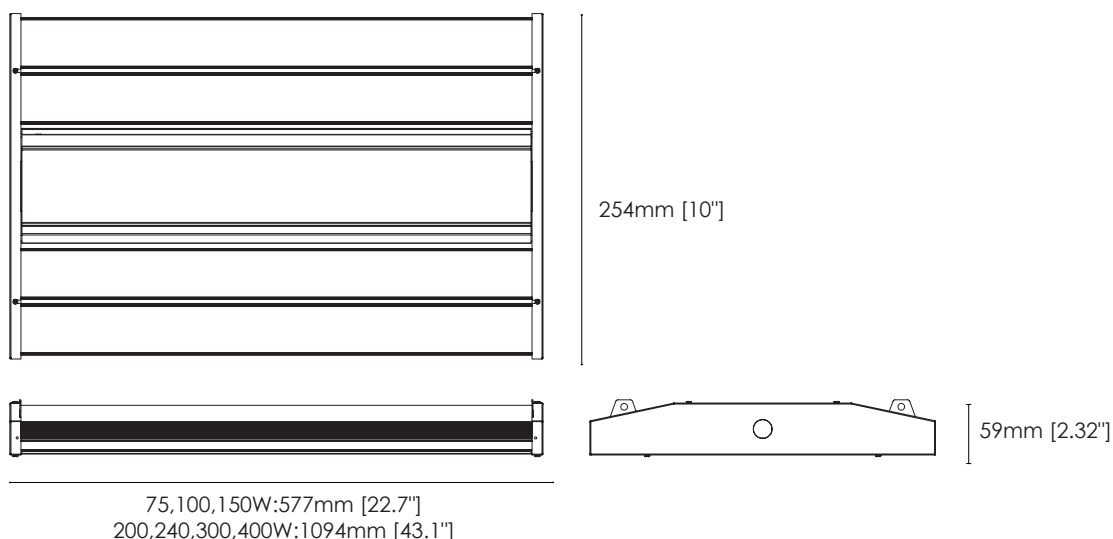

ORDERING GUIDE

Ordering code example: AE-IL-TR75W-40-UV-220-120-0-10-SS

FIXTURE FAMILY	POWER	CCT	VOLTAGE	LED CODE	BEAM ANGLE	CONTROL	DRIVER
AE-IL-TR ERALUX industrial fixtures Trinity rectangular high bay	75W- 75 Watts: 11,250 lumens	40- 4000K CCT	UV- 120-277V	220-	90- 90° beam angle	0-10 0-10 external dimming down to 10%	-SS
	100W- 100 Watts: 15,000 lumens			280-			
	150W- 150 Watts: 22,500 lumens	50- 5000K CCT	HV- 347-480V	440-	120- 120° beam angle	MS- Microwave Sensor PIR Sensor	-SS-6' Cord Nema Plug
	200W- 200 Watts: 30,000 lumens			560-			
	240W- 240 Watts: 36,000 lumens	EM- Emergency battery backup		680-	5090- 50x90° beam angle		
	300W- 300 Watts: 45,000 lumens			880-			
	400W- 400 Watts: 60,000 lumens			1120-			

Hockey arenas have evolved significantly over the years, and the integration of LED lighting has played a pivotal role in enhancing both the player's performance and the spectator's experience. Unlike traditional lighting systems, LED lights offer superior clarity and brightness, which significantly improves visibility on the ice.

For players, this means better perception of the puck and other players, allowing for more precise reactions. This heightened level of attention is crucial in a fast-paced sport like hockey, where split-second decisions can determine the outcome of the game.

LED lighting in hockey arenas also improves visibility for spectators with uniform illumination and enhances TV broadcasts. It benefits players by reducing glare and shadows, leading to a better performance.

These advanced lighting systems also contribute to significant cost savings on maintenance and energy consumption over time, as LEDs have a longer lifespan compared to traditional lighting solutions.



The aesthetic appeal of LED lighting can enhance the arena's ambiance, making it a more attractive venue for a variety of events beyond hockey, such as concerts, exhibitions, and community gatherings. The versatility and efficiency of LED lighting systems represent an investment in the future of sports and entertainment venues, ensuring they remain cutting-edge and environmentally responsible.







Linear fixtures are the sleek solution for a modern setting. Blending beautifully, or configured to make a statement, the linear has endless possibilities. ERALUX's linear fixtures vary in length, mounting options, colours, and so much more. Connected to make a continuous run seamlessly, allowing one to alter how they chose to bring light into a space. ERALUX offers linear fixtures that provide up and down lighting or solely down lighting. A great fit into different ceiling types, available in different shapes, the linears are limitless.

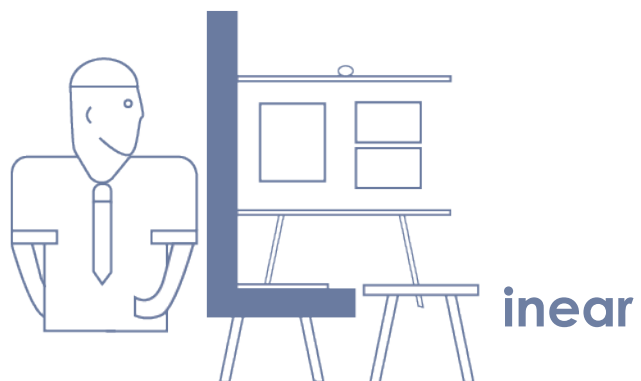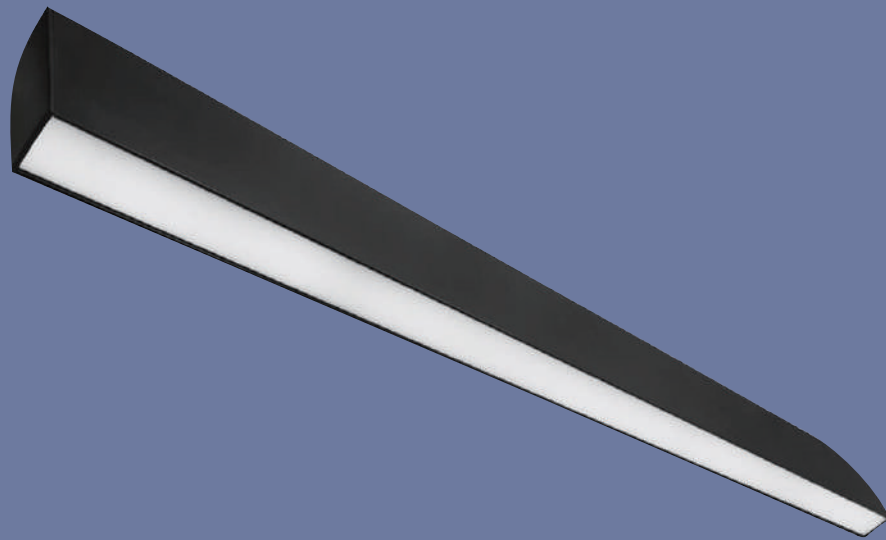



JB is an economical yet discrete replacement for linear fixtures. They are available in 4- and 8-foot lengths and are designed to meet installation needs for surface-mounted requirements. Furthermore, this luminaire offers performance above 130 LPW while showing great versatility in operating voltage from 120 to 347V. The luminous part is integrated and fastened to the fixture body by snap-locks which makes it easy to open fixtures. Field-adjustable light output and CCT options.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 125 LPW at 80 CRI


Distribution : Lambertian

ORDERING GUIDE

Ordering code example: AE-SF-JBCA-0445/38/34-835-50

FIXTURE FAMILY	INPUT VOLTAGE	LENGTH	POWER	CCT	SENSOR	FINISH
AE-SF-JB ERALUX Jobber linear strip fixture	CA- 120-347V	02 2FT length	25/20/15 25 watts: ~3,250 lumens 20 watts: ~2,600 lumens 15 watts: ~1,950 lumens	-835-50 80 CRI CCT Switchable: 3500K/4000K /5000K	[BLANK] -EM Emergency battery backup -MS Bi-level motion sensor	[BLANK] White -BK Atomic Black
		04 4FT length 47.3"	45/38/34 45 watts: ~5,895 lumens 38 watts: ~4,978 lumens 34 watts: ~4,454 lumens			
		08 8FT length 94.2"	90/75/65 90 watts: ~11,790 lumens 75 watts: ~9,825 lumens 65 watts: ~8,515 lumens			

DIMENSIONS

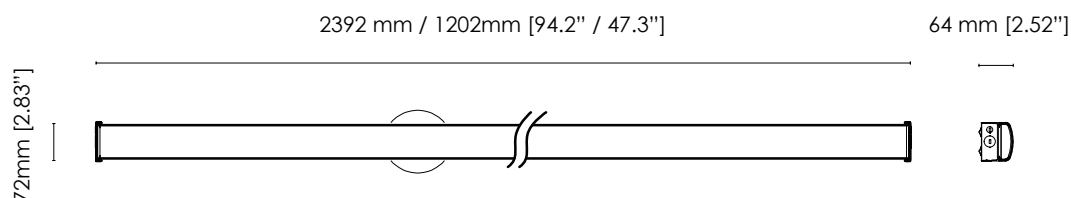



The MRE series is an economical replacement for linear fixtures. They are available in 4 feet lengths and are designed to meet installation needs for surface-mounted requirements. Furthermore, this luminaire offers a performance above 115 LPW at a variety of power and CCT options while showing great versatility in operating voltage from 120-347 Vac.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V

Lumens per Watt : 108-115 LPW at 80 CRI


Distribution : Lambertian

ORDERING GUIDE

Ordering code example: AE-SF-MRE-04-3248N

FIXTURE FAMILY	LENGTH	POWER	CCT	CONTROLS
AE-SF-MRE- Moonraker Evolve linear wraparound fixture 120-347V	04- 4FT length	3248 Switchable Power 48 watts: 5,520 lumens 40 watts: 4,600 lumens 32 watts: 3,680 lumens	N 80 CRI 3500K, 4000K, 5000K CCT Switchable	[BLANK] 0-10V -MS Motion Sensor

DIMENSIONS

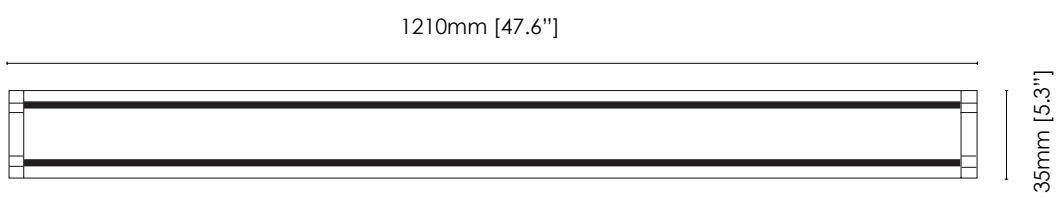



The VDE is an energy-efficient and economical LED linear fixture designed for harsh environments and industrial-suited applications where dust and water resistance are necessary. This fixture is configured with adjustable power and CCT switches that can cover most of your project needs. Integrated lens and module plate that makes the installation process simply a breeze.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt :

~130 LPW at 5000K, 80 CRI 4 FT


~130 LPW at 5000K, 80 CRI 4 FT

~137 LPW at 5000K, 80 CRI 8 FT

Distribution : 120°

VDE

DIMENSIONS

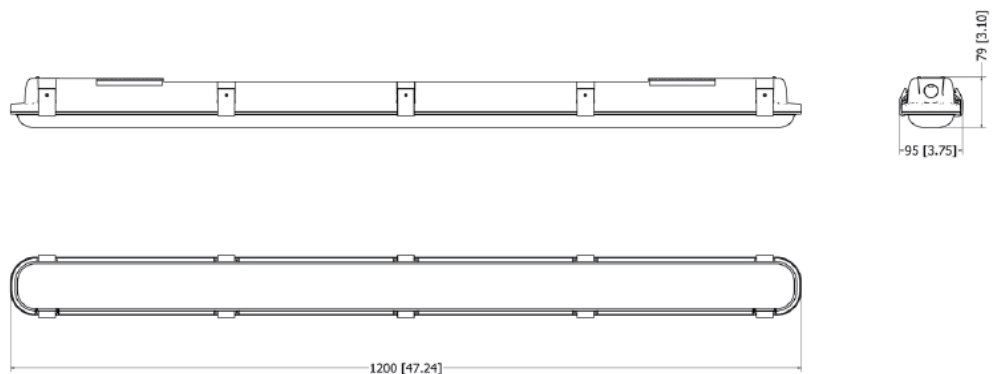

ORDERING GUIDE

Ordering code example: AE-SF-VDE-CA-4-54/46/38-010-8XX

FIXTURE FAMILY	INPUT VOLTAGE	SIZE	POWER	CONTROLS	CRI & CCT	SENSOR/EMBB
AE-SF-VDE- VADOR EVOLVE Series Tri-proof linear fixture	CA- 120-347V	2- 2 feet: 23.6" 600mm	25/20/15- 25/20/15 watts: 3,250/2,600/1,950 lumens	010- 0-10V dimming	8XX 80 CRI & 3500K/4000K/ 5000K CCT Switchable	[BLANK]
		4- 4 feet: 47.2" 1200mm	54/46/38- 54/46/38 watts: 7020/5980/4940 lumens			-MS Microwave motion sensor with photocell
		8- 8 feet: 94.5" 2400mm	90/75/65- 90/75/65 watts: 12,060/10,275/ 9,100 lumens			-EM Emergency Battery Back-up (8W)
						-ME Microwave motion Sensor with photocell and EMBB



The VDHO Series is an energy-efficient and economical LED linear fixture designed for harsh and industrial environment. This fixture is configured with adjustable power and CCT switches that can cover most of your project needs. Integrated lens and module plate that makes the installation process simply a breeze. The VDHO can deliver an impressive 30K lumens while providing flexibility in lumens output and CCT.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac


Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 160 LPW at 80 CRI

Distribution : 120°

DIMENSIONS

VDHO

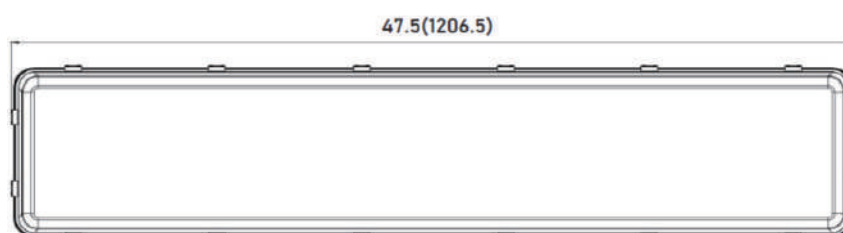

ORDERING GUIDE

Ordering code example: AE-SF-VDE-CA-4-54/46/38-010-8XX

FIXTURE FAMILY	INPUT VOLTAGE	SIZE	POWER	CONTROLS	CRI & CCT	SENSOR/EMBB
AE-SF-VDHO VADOR EVOLVE Series Tri-proof linear fixture	CA 120-347V	4- 4 feet: 47.2" 1200mm	200/185/155- 200/185/155 watts: 32000/29600/24 800 lumens	010- 0-10V dimming	8XX 80 CRI & 3500K/4000K/ 5000K CCT Switchable	[BLANK] -MS Microwave motion sensor -EM Emergency Battery Back-up




For our most popular fixture, we took customers' feedback into consideration while creating the 2nd generation. Now with a remolded housing that meets the modern project space, the G5's housing can be connected seamlessly in both light and fixture appearance. Available for suspended mounting, surface mounting, and wall mounting in various run lengths.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac
 Dimming : 0-10V dimming with dim-to-off
 Lumens per Watt :
 120 LPW at 80 CRI (6 FT & 8FT)
 105 LPW at 80 CRI (4 FT)
 Distribution : Lambertian

DIMENSIONS

G5

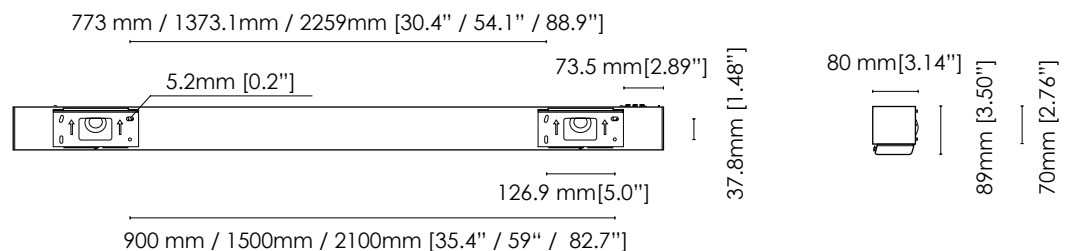

ORDERING GUIDE

Ordering code example: AE-SF-G5CA44030/40/50010WH-GB

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES
AE-SF-G5 ERALUX G5 linear architectural fixture	CA 120-347V input voltage	2 2 feet length	20 20 watts: 2100 lumens	30/35/40* 3000/3500/4000K selectable CCT 30/40/50 3000/4000/5000K selectable CCT	010 0-10V dimming with dim-to- off	WH-GB ERALUX Nebula White BK-GB ERALUX Atomic Black SV-GB Silver GN-GB Gun powder finish RAL 7011	[BLANK] 0-10V Standard -LDE1** Lutron Hi- lume 1% EcoSystem driver with Soft- on, Fade- to-Black dimming -EMBB*** Emergency battery backup -1DIM****	-PU Power cord – 120-277V -PU-C Power cord – 120-277V with 5-inch Canopy -PH Power cord – 120-347V -PH-C Power cord – 120-347V with 5-inch Canopy
		4 4 feet length	40 40 watts: 4200 lumens					
		5 5 feet length	40 40 watts: 4200 lumens					
		6 6 feet length	50 50 watts: 6000 lumens					
		8 8 feet length	70 70 watts: 8400 lumens					

Each fixture comes standard with 2x 6FT suspension cables

*Default CCT setting is 3500K, but can be changed upon request before shipping.

**LDE1 option requires color selection if not the default CCT, 3500K.

***EMBB option available in 120-277V only.

**** 1DIM available only in 120-277V, it works for 4,5,6,8 FT

Wall mount option : AE-SF-WMB-WH & AE-SF-WMB-BK



The G5 PRIME is a high-end, low glare architectural linear which offers a high lumen output while maintaining an UGR level below 16. The housing can be connected seamlessly to achieve long runs. It is available for suspended mounting, surface mounting, and wall mounting in various run lengths. Our ERALUX color finish reduces glare by using a baked enamel coating that enhances your project space.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac
 Dimming : 0-10V
 Lumens per Watt :
 100 LPW at 80 CRI for 6FT and 8FT
 90 LPW at 80 CRI for 4 FT
 Distribution : Lambertian

G5 PRIME

DIMENSIONS



606/1206/1806/2406mm [23.75" /47.5"/71.1"/94.7"]

ORDERING GUIDE

Ordering code example: AE-SF-G5CA44030/35/40010WH-GB-X-X-P

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES	LENS
AE-SF-G5 ERALUX G5 linear architectural fixture	CA 120-347V	4 4 feet length	40 50 watts: 4,500 lumens 30% up-light, 70% downlight	30/35/40 3000/3500/ 4000K selectable CCT	010 0-10V dimming	WH-GB ERALUX Nebula White	[BLANK] 0-10V Standard	-PU Power cord – 120-277V	-P Parabolic Lens
		6 6 feet length	50 80 watts: 7,200 lumens 30% up-light, 70% downlight	30/40/50 3000/4000/ 5000K selectable CCT		BK-GB ERALUX Atomic Black	-LDE1 Lutron Hi-lume 1% EcoSystem driver with Soft- on, Fade-to- Black dimming	-PU-C Power cord – 120-277V with 5-inch Canopy	
		8 8 feet length	70 100 watts: 9,000 lumens 30% up-light, 70% downlight			SV-GB Silver	-EMBB Emergency battery backup	-PH Power cord – 120-347V	
						GN-GB Powder RAL7011	-1DIM	-PH-C Power cord – 120-347V with 5-inch Canopy	



The G5 PRIME SHADOW is a high-end, black chromed reflector, low glare architectural linear, which offers a high lumen output while maintaining a UGR level below 16. The housing can be connected seamlessly to achieve longer runs. It is available for various run lengths for suspended mounting, surface mounting, and wall mounting. Our ERALUX colour finish reduces glare using a baked enamel coating that enhances and differentiates your project space.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac


Dimming : 0-10V dimming with dim-to-off

Lumens per Watt : 50 LPW at 80 CRI

Distribution : Lambertian, Up-light and downlight, Downlight

DIMENSIONS

G5 PRIME SHADOW



606/1206/1806/2406mm [23.75" /47.5"/71.1"/94.7"]

ORDERING GUIDE

Ordering code example: AE-SF-G5CA44030/35/40010WH-GB-PS

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES	LENS
AE-SF-G5 ERALUX G5 linear architectural fixture	CA 120-347V	4 4 feet length	40 40 watts: 2000 lumens	30/35/40 3000/3500/ 4000K selectable CCT	010 0-10V dimming with dim-to- off	WH-GB ERALUX Nebula White	[BLANK] 0-10V Standard -EMBB Emergency battery backup -1DIM 1% Dimming	-PU Power cord – 120-277V	-P Parabolic Lens
		6 6 feet length	50 50 watts: 2800 lumens			BK-GB ERALUX Atomic Black		-PU-C Power cord – 120-277V with 5-inch Canopy	
		8 8 feet length	70 70 watts: 4000 lumens			SV-GB Silver GN-GB Powder RAL7011		-PH Power cord – 120-347V -PH-C Power cord – 120-347V with 5-inch Canopy	



The SPT series light features a 30% up-light and a 70% downlight, ideal for office space to ensure a uniformly lit working space. These fixtures can be mounted in a continuous row seamlessly. The SPT also features the selectable CCT capabilities enabling the end user to set up their environment to the right ambiance.

OPERATIONS & ELECTRICAL


Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming

Lumens per Watt : 105 LPW at 80 CRI, 4000K

Distribution : Lambertian, 30% up-light, 70% downlight

SPT

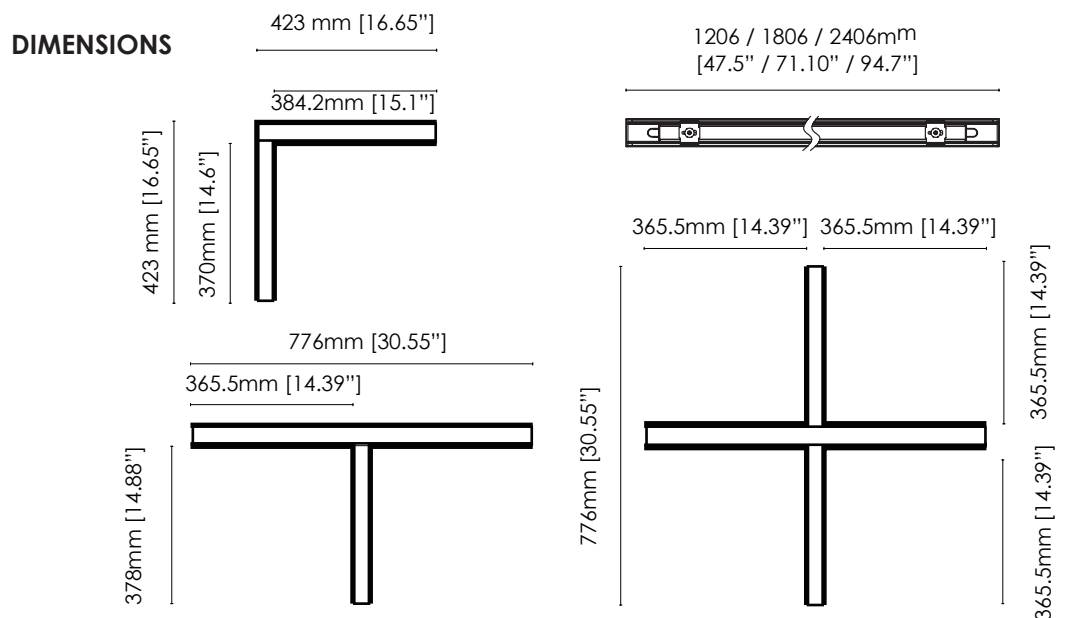

ORDERING GUIDE

Ordering code example: AE-SF-SPT25030/35/40010WH-GB

FIXTURE FAMILY	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES
AE-SF-SPT ERALUX SPT Selectable linear architectural fixture	2 2 feet	30 30 watts: 3,150 lumens 30% up-light, 70% downlight	30/35/40 3000/3500/4000K selectable CCT	010 0-10V external dimming	WH-GB ERALUX Nebula White	[BLANK] None -LDE1** Lutron Hi-lume 1% EcoSystem driver with Soft-on, Fade- to-Black dimming technology down to 1%	[BLANK]
	4 4 feet	50 50 watts: 5250 lumens 30% up-light, 70% downlight					-PU Power cord 120 – 277V
	6 6 feet	80 80 watts: 8400 lumens 30% up-light, 70% downlight					-PU-C Power cord 120 – 277V with 5-inch Canopy
	8 8 feet	100 100 watts: 10500 lumens 30% up-light, 70% downlight					-PH Power cord 120 – 347V
120-347Vac input voltage					GN-GB Powder RAL7011	-EMBB*** Emergency Battery Backup -1DIM	-PH-C Power cord 120 – 347V with 5-inch Canopy

NOTES:

2x 6FT suspension cables included with fixture purchase

***EMBB option available in 120-277V only

**LDE1 option requires color selection if not the default CCT, 3500K.

* Default CCT setting is 3500K, but can be changed upon request before shipping

www.eralux.com



The SPT PRIME is a high-end, low glare architectural linear which offers a high lumen output while maintaining an UGR level below 16. The housing can be connected seamlessly to achieve long runs. The SPT series light features a 30% up-light and a 70% downlight, ideal for office space to ensure a uniformly lit working space. These fixtures can be mounted in a continuous row seamlessly. The SPT also features the selectable CCT capabilities enabling the end user to set up their environment to the right ambiance.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V

Lumens per Watt : 50 LPW at 80 CRI, 4000K

Distribution : Lambertian, Up-light and downlight, Downlight

DIMENSIONS



606/1206/1806/2406mm [23.75" /47.5"/71.1"/94.7"]

ORDERING GUIDE

Ordering code example: AE-SF-G5CA440N30/35/40010-WMT-WH-GB

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES	LENS
AE-SF-SPT ERALUX SPT Selectable linear architectural fixture	CA 120-347V	2 2 feet length	30 30 watts: 2,700 lumens 30% up-light, 70% downlight						
		4 4 feet length	40 50 watts: 4,500 lumens 30% up-light, 70% downlight	30/35/40 3000/3500/ 4000K selectable CCT		WH-GB ERALUX Nebula White	[BLANK] 0-10V Standard	-PU Power cord – 120-277V	
		6 6 feet length	50 80 watts: 7,200 lumens 30% up-light, 70% downlight	30/40/50 3000/4000/ 5000K selectable CCT	010 0-10V dimming	BK-GB ERALUX Atomic Black	-LDE1 Lutron Hi-lume 1% EcoSystem driver with Soft- on, Fade-to- Black dimming	-PU-C Power cord – 120-277V with 5-inch Canopy	-P Parabolic Lens
		8 8 feet length	70 100 watts: 9,000 lumens 30% up-light, 70% downlight			SV-GB Silver	-EMBB Emergency battery backup	-PH Power cord – 120-347V	
						GN-GB Powder RAL7011	-1DIM	-PH-C Power cord – 120-347V with 5-inch Canopy	



The SPT PRIME SHADOW is a high-end, black chromed reflector, low glare architectural linear, which offers a high lumen output while maintaining a UGR level below 16. The housing can be connected seamlessly to achieve longer runs. It is available for various run lengths for suspended mounting, surface mounting, and wall mounting. Our ERALUX colour finish reduces glare using a baked enamel coating that enhances and differentiates your project space.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V dimming with dim-to-off

Lumens per Watt : 50 LPW at 80 CRI

Distribution : Lambertian, Up-light and downlight, Downlight

DIMENSIONS

SPT PRIME SHADOW



606/1206/1806/2406mm [23.75" /47.5"/71.1"/94.7"]

ORDERING GUIDE

Ordering code example : : AE-SF-SPTCA45030/35/40010WH-GB-PS

FIXTURE FAMILY	VOLTAGE	LENGTH	POWER	CCT	CONTROLS	FINISH	DIMMING	ACCESSORIES	LENS
AE-SF-SPT ERALUX SPT linear architectural fixture	CA 120-347V	4 4 feet length	50 50 watts: 2500 lumens	30/35/40 3000/3500/ 4000K selectable CCT	010 0-10V dimming with dim-to- off	WH-GB ERALUX Nebula White	[BLANK] 0-10V Standard	-PU Power cord – 120-277V	-PS Parabolic Lens
		6 6 feet length	80 80 watts: 3600 lumens			BK-GB ERALUX Atomic Black	-EMBB Emergency battery backup	-PU-C Power cord – 120-277V with 5-inch Canopy	
		8 8 feet length	100 100 watts: 5000 lumens			SV-GB Silver	-1DIM 1% Dimming	-PH Power cord – 120-347V	
						GN-GB Powder RAL7011		-PH-C Power cord – 120-347V with 5-inch Canopy	



The G6 is the next evolution of linear architectural lighting. The G6 series offers a simple installation that also allows the option of continuous rows with a seamless transition from fixture to fixture. It has a sleek modern look and comes in three unique finishes Nebula White, Atomic Black and Silver. The G6 provides the elegance that will enhance the lighting environment and impose a distinguished design for the entire space.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%



Lumens per Watt : 91 LPW at 90 CRI White

87 LPW at 90 CRI Black

Distribution : Lambertian

DIMENSIONS

606 / 1206 / 1806 / 2406mm
[23.85" / 47.5" / 71.10" / 94.7"]

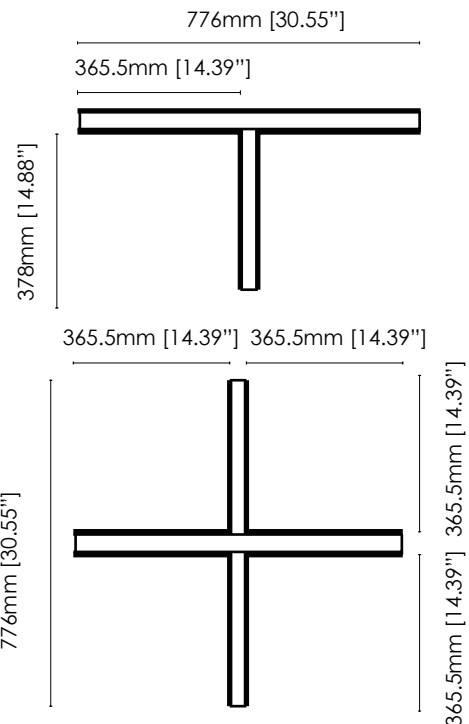

ORDERING GUIDE

Ordering code example: AE-SF-G6-A-CA-220-B-P30-010-PL-WH

FIXTURE FAMILY	GEN	VOLTAGE	SIZE	POWER	ACCENT	CRI	CCT	DIMMING	LENS	FINISH	OPTION
AE-SF-G6 ERALUX G6 linear architectural fixture	-A First GEN	-CA 120-347V	2 2 feet	20 20 watts 1780 lumens	-B No Accent	-P 90 CRI	30-35-40 3000-3500- 4000K selectable CCT	-010 0-10V external dimming down to 10%	-PL Full length polycarbonate lens	WH-GB ERALUX Nebula White finish to reduce glare off the housing	[BLANK] None
			4 4 feet	40 20/30/40 watts 1780/2670/3560 lumens						BK-GB ERALUX Atomic Black finish to reduce glare off the housing	-1DIM Dim down to 1%
			6 6 feet	50 30/40/50 watts 2670/3560/4450 lumens						SV-GB Silver – RAL9006	-PU-C Power cord with 5-inch Canopy
			8 8 feet	70 40/70 watts 3560/6230 lumens						GN-GB Powder RAL7011	



The SPS series is a revolutionary compact product with the ability to adjust lumen output and offers a variety of uplight and downlight options. It even offers the unique option of 100% uplight. Whether its pendant mount or wall mount, the installation process is simple and will result in an elegant lighting solution.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 88 LPW at 90 CRI (white) & 75 LPW at 90 CRI (black)

DIMENSIONS

1206 mm / 1806mm / 2406mm [47.5" / 71.1" / 94.7"]

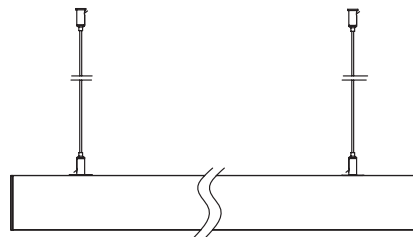

45 mm[1.77"]

SPS

ORDERING GUIDE

Ordering code example: AE-SF-SPS-A-CA-450-B-P30-010-PL-WH

FIXTURE FAMILY	GEN	VOLTAGE	SIZE	POWER	ACCENT	CRI	CCT	DIMMING	LENS	FINISH	BEAM	ACCESSORIES
AE-SF-SPS ERALUX SPS architectural fixture	-A First GEN	-CA 120-347V input voltage	-2 2 feet length	30	-B No Accent	-P 90 CRI	30-35-40 3000K- 3500K- 4000K CCT	-010 0-10V external dimming down to 10%	-PL Full length poly- carbonate lens	-WH ERALUX Nebula White	[BLANK] 30% up light, 70% downlight	[BLANK] 0-10V
			-3 3 feet length	20/30W								
			-4 4 feet length	50								
			-6 6 feet length	80								
			-8 8 feet length	100								
				60/80/100W								
							30-40-50 5000K CCT			-BK ERALUX Atomic Black	-100U 100% up light, 0% downlight	-1DIM
										-SV Silver - RAL7044	-60U40D 60% up light, 40% downlight	
										GN-GB Powder RAL7011		



Falcon is the economical and yet discrete replacement for surface mount and trim-less look of plaster-in recessed linear fixtures. They are available in 2-, 4- and 8-foot lengths to fulfill various design purpose. Furthermore, this luminaire offers a performance up to 130 LPW while showing great versatility in operating voltage from 120-347 Vac.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac


Dimming : 0-10V

Lumens per Watt : 88 -108 LPW at > 80 CRI

Distribution : 110° Downlight

FALCON

DIMENSIONS

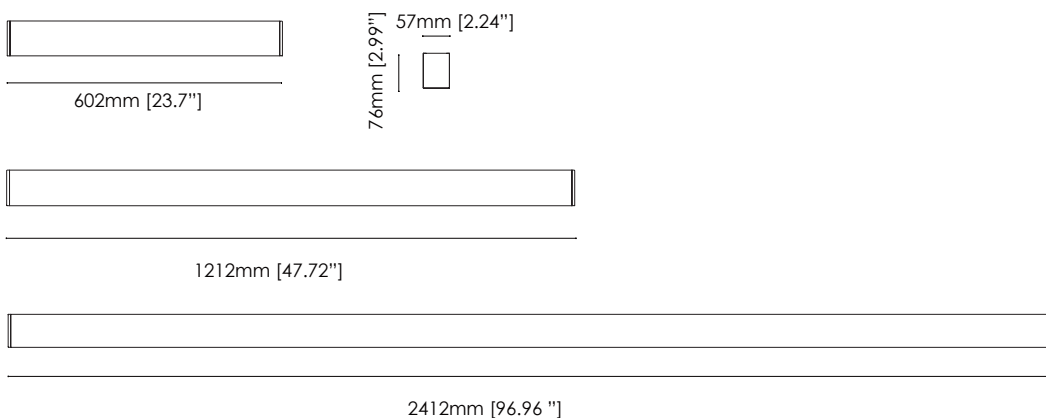

ORDERING GUIDE

Ordering code example: AE-SF-FA-2-18W-CA01030/40/50BKSM

FIXTURE FAMILY	LENGTH	POWER	INPUT VOLTAGE	CONTROLS	CCT	FINISH	MOUNTING
AE-SF-FA- ERALUX FALCON linear architectural fixture	2 2' (602mm/1.975ft/23.71in)	-18W 1650-1950 lumens	-CA 120-347V	010 0-10V external dimming down to 10%	30/35/40 3000/3500/4000K Dimmable & CCT Switchable	WH ERALUX Nebula White	SMT Surface mount
	4 4' (1212mm/3.976ft/47.72in)	-36W 3200-3850 lumens			30/40/50 3000/4000/5000K Dimmable & CCT Switchable	BK ERALUX Atomic Black	
	8 8' (2412mm/94.96ft/7.91in)	-72W 6400-7700 lumens					



The LX Series is a CCT/POWER Switchable linear that comes in several sizes to fit any project. Other than the power and size flexibility ; it can be mounted in any position based on any request (Recessed Gypse/Ceiling/Suspended). Finally, our new LX Series comes with several lenses adding an aesthetic look to the surrounding . All of your requests are fulfilled with our LX SERIES.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V

Lumens per Watt : 85-90 LPW at 90 CRI

Beam Angle: 65°, 80°, 108°

LX SERIES


ORDERING GUIDE (3 TABLES) ON THE NEXT PAGE

UGR LENS

Ordering code example: AE-SF-LX-4-31-30/35/40-D-WH-UGR-AIR

FIXTURE FAMILY	SIZE	POWER	CCT	DIMMING	FINISH	LENS	BEAM
AE-SF-LX LX Series linear	-31 4 feet length	Power Selectable 21/26/31W	30/35/40 3000/3500/4000K selectable CC	-D 0-10V dimming	-WH White	-UGR Prismatic Diffuser	[BLANK] Standard
	-46 6 feet length	Power Selectable 36/41/46W			-BK Atomic Black		-RMB Recessed Mount Bracket
	-61 8 feet length	Power Selectable 51/56/61W			-SV Silver		-AIR Suspended Linear** Stand alone fixture

DIMENSIONS



1230/1839/2449mm

50mm



70mm

HEXCEL LENS

Ordering code example: AE-SF-LX-4-31-30-D-WH-HX-AIR



FIXTURE FAMILY	SIZE	POWER	CCT	DIMMING	FINISH	LENS	BEAM
AE-SF-LX LX Series linear		-31 31 WATTS 1,408 lms @3500K					
	-4 4 feet length		-30 3000K		-WH White		[BLANK] Standard
	-46 46 WATTS 2,089 lms @3500K		-35 3500K	-D 0-10V dimming	-BK Black	-HX Honeycomb Lens	-RMB Recessed Mount Bracket
	-6 6 feet length		-40 4000K		-SV Silver		-AIR Suspended Linear** Stand alone fixture
	-8 8 feet length	-61 61 WATTS 2,771 lms @3500K					

OPTICAL LENS

Ordering code example: AE-SF-LX-4-34-30-D-WH-OPL-AIR



FIXTURE FAMILY	SIZE	POWER	CCT	DIMMING	FINISH	LENS	BEAM
AE-SF-LX LX Series linear		-34 34 WATTS 2,316 lms @3500K					
	-4 4 feet length		-30 3000K		-WH White		[BLANK] Standard
	-46 46 WATTS 3,440 lms @3500K		-35 3500K	-D 0-10V dimming	-BK Atomic Black	-OPL Optical Lens	-RMB Recessed Mount Bracket
	-6 6 feet length		-40 4000K		-SV Silver		-AIR Suspended Linear** Stand alone fixture
	-8 8 feet length	-67 67 WATTS 4,563 lms @3500K					

LOUVER LENS

Ordering code example: AE-SF-LX-4-31-30-D-WH-LVR-AIR



FIXTURE FAMILY	SIZE	POWER	CCT	DIMMING	FINISH	LENS	BEAM
AE-SF-LX LX Series linear		-31 31 WATTS 1,920 lms @3500K					
	-4 4 feet length		-30 3000K		-WH White		[BLANK] Standard
	-46 46 WATTS 2,849 lms @3500K		-35 3500K	-D 0-10V dimming	-BK Atomic Black	-LVR Louver lens	-RMB Recessed Mount Bracket
	-6 6 feet length		-40 4000K		-SV Silver		-AIR Suspended Linear** Stand alone fixture
	-8 8 feet length	-61 61 WATTS 3,778 lms @3500K					

** AIR comes with suspension kit (2 canopy/ power cord/ /2 suspension wires) ; standalone fixture.

*** For continuous runs ; Links and one-hole canopies are ordered separately.



The Atlantis is a recessed linear that provides an elegant appearance in any indoor commercial office. The exposed driver and the removable lens makes the installation simple and intuitive. This series has been designed to be mounted into gypsum ceilings or walls.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V

Lumens per Watt : 85-90 LPW at 80 CRI



Distribution : Lambertian

ORDERING GUIDE

Ordering code example: AE-SF-ATL35432WH

FIXTURE FAMILY	CCT	SIZE	POWER	FINISH
AE-SF-ATL ERALUX Atlantis linear architectural fixture 120-277V	30 3000K	-4 4 feet length	32 32 watts: 2720 lumens	-WH ERALUX Nebula White
		-5 5 feet length	40 40 watts: 3400 lumens	
	35 3500K	-6 6 feet length	46 46 watts: 4080 lumens	
		-8 8 feet length	62 62 watts: 5440 lumens	
	40 4000K	-90L L Shape	32 32 watts: 2720 lumens	-BK ERALUX Atomic Black
		-90N Inner L Shape	32 32 watts: 2720 lumens	
		-90 Outer L Shape	32 32 watts: 2720 lumens	-SV Silver
		-T T shape	46 46 watts: 4080 lumens	
	40 4000K	-X X shape	62 62 watts: 5440 lumens	

DIMENSIONS



ATLANTIS



The F2 Series is the surface mount linear architectural lighting fixture. The F2 Series offers the simplicity of installation for a fast and efficient delivery. It is further enhanced with the access to the led board, drivers and any other components from below. They are available in 4-, 6- and 8-feet lengths. The CCT switchable switch also enables a rapid change of lighting environment.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 1-10V


Lumens per Watt : 750lm/ft

Beam angle: Lambertian

DIMENSIONS



1232/1841/2451mm [48.5" / 72.48" / 96.5"]



F2

ORDERING GUIDE

Ordering code example: AE-SF-F2-4-31-30/40/CCT-BK

FIXTURE FAMILY	LENGTH	POWER	CCT	FINISH	MOUNT
AE-SF-F2- ERALUX F2 surface mount linear architectural fixture	3 3 Feet	-23 23W-2,300 lumens	-30/40/CCT- 3000/3500/4000K switchable CCT	BK ERALUX Atomic Black	-SMT Surface Mount *SMT comes with a 2FT power cord
	4 4 Feet	-31 31W-3,000 lumens		WH ERALUX Nebula White	
	6 6 Feet	-46 46W-4,500 lumens		SV Silver Finish	
	8 8 Feet	-61 61W-6,000 lumens		RALXXXX Customized finish	
FIXTURE FAMILY	LENGTH	CCT	FINISH	MOUNT	
AE-SF-F2- ERALUX F2 surface mount linear architectural fixture	L-90L L Shape: 31W – 3,000 lumens	-30/40/CCT- 3000/3500/4000K switchable CCT	BK ERALUX Atomic Black	-SMT Surface Mount *SMT comes with a 2FT power cord	
	T- T Shape 46W – 4,500 lumens		WH ERALUX Nebula White		
	X- X Shape 61W – 6,000 lumens		SV Silver Finish		
			RALXXXX Customized finish		



Elevating the F2 Series, the F2 AIR offers the same simplicity for maintenance in installation as the original F2 Series, but as a suspended fixture with its ease of access of the LED boards, drivers and any other components from below. This modern fixture is available in 4-, 6- and 8- lengths. Its CCT selectable option allows users to change the light color on site whenever required.

OPERATIONS & ELECTRICAL


Input Voltage : 120-277 Vac

Dimming : 1-10V

Lumens per Watt : 750lm/ft


Beam angle: Lambertian

DIMENSIONS



1232/1841/2451mm [48.5" /72.48"/96.5"]

70mm [2.76"]



55mm [2.17"]

F2 AIR

ORDERING GUIDE

Ordering code example: AE-SF-F2-4-31-30/40/CCT-BK

FIXTURE FAMILY	LENGTH	POWER	CCT	FINISH	MOUNT
AE-SF-F2- ERALUX F2 surface mount linear architectural fixture	3 3 Feet	-23 23W-2,300 lumens	-30/40/CCT- 3000/3500/4000K switchable CCT	BK ERALUX Atomic Black	AIR Suspended fixture Includes Suspension Kit (AE-SF-F2-SUSPENSION-KIT- XX)
	4 4 Feet	-31 31W-3,000 lumens		WH ERALUX Nebula White	
	6 6 Feet	-46 46W-4,500 lumens		SV Silver Finish	AIRLINK Suspended fixture Includes Link and Suspension Kit (AE-SF-F2-LINK-KIT & AE- SFF2-L-PTB-NPF-6-XX)
	8 8 Feet	-61 61W-6,000 lumens		RALXXXX Customized finish	

FIXTURE FAMILY	LENGTH	CCT	FINISH
AE-SF-F2- ERALUX F2 surface mount linear architectural fixture	L-90L L Shape: 31W – 3,000 lumens	-30/40/CCT- 3000/3500/4000K switchable CCT	BK ERALUX Atomic Black
	T- T Shape 46W – 4,500 lumens		WH ERALUX Nebula White
	X- X Shape 61W – 6,000 lumens		RALXXXX Customized finish



Flexa is a revolutionary lighting solutions designed to illuminate spaces with unparalleled adaptability. Engineered with precision, this innovative lighting system boasts 360-degree light dispersion. This fixture comes standard with an insert enabling it to be bent into various shapes, while maintaining its sleek and sophisticated design. It has various mounting options: Surface Mount, and Pendant either vertically or horizontally. Furthermore, it can withstand any pattern and maintain its uniform look and distribution. FLEXA is ideal for any space where differentiation and uniqueness is key!

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : No dimming

ORDERING GUIDE

Ordering code example: AE-DC-FX-16-3090-H-AIR

FLEXA

FIXTURE FAMILY	LENGTH	CCT Selectable	CRI	MOUNTING
AE-DC-FX ERALUX Flexa Decorative free bend to patterns Flexible Fixture	-16 16 Feet 6W/FT 483LM/FT	-30 3000K CCT	90 90 CRI	-H-SMT Horizontal surface mount
		-35 3500K CCT		-H-AIR Horizontal pendant mount
		-40 4000K CCT		-H-AIR-LINK Horizontal pendant mount
				-CUSTOM Comes with just one driver and driver box, this is for custom mounting

ORDERING GUIDE

Ordering code example: AE-DC-FXY-16-3080-CUSTOM

FLEXY

FIXTURE FAMILY	LENGTH	CCT Selectable	CRI	ACCESSORIES
AE-DC-FXY RALUX Flexy Decorative free cut to desired length Flexible Fixture	-16 16 Feet 6W/FT 530LM/FT	-30 3000K CCT	80 80 CRI	-H-SMT Horizontal surface mount
		-35 3500K CCT		-H-AIR Horizontal pendant mount
		-40 4000K CCT		-V-SMT-U Vertical surface mount U-Shaped
				-H-AIR-O Horizontal pendant mount O-Shape
				-H-AIR-LINK Horizontal pendant mount
				-CUSTOM Comes with just one driver and driver box, this is for custom mounting



In the heart of a bustling city, a black and white themed minimalist office stands as a beacon of modernity and efficiency. The sleek and clean design revolves around a monochromatic palette, combining stark white walls with black accents in furniture and fixtures. The office is punctuated by suspended LED lighting, which casts a crisp, even glow across the workspace, eliminating shadows and promoting a clear visual environment.

This strategic lighting not only enhances the aesthetic appeal but also reduces eye strain, making it easier for employees to stay focused on their tasks.


The minimalist approach to office design minimizes distractions, creating an environment where clutter is noticeably absent. Each piece of furniture is carefully chosen for its functionality and simplicity to create a sense of order and calm. The absence of unnecessary decorations and the deliberate use of space ensures that employees can concentrate fully on their work without being overwhelmed by visual noise. This thoughtful design fosters a sense of discipline and precision, which can translate into higher productivity and better quality of work.

This harmonious blend of aesthetics and functionality not only boosts employees' morale but also encourages a culture of efficiency and excellence.

BRIGHT OPTIONS FOR EVERY ENVIRONMENT.

Durable and elegant lighting options to light up every environment.

Modernizing outdoor spaces with their sleek and contemporary finishes. Varying from squared or cylindrical wall-mounted fixtures to area lights, bollards, canopies, and flood lights, ERALUX offers outdoor modern LED lighting fixtures that are suitable for your next project. Available at ERALUX in a selection of CCTs, lumens and finishes, with their robust, strong, and durable designs, these outdoor LED lights are designed to endure harsh environments.

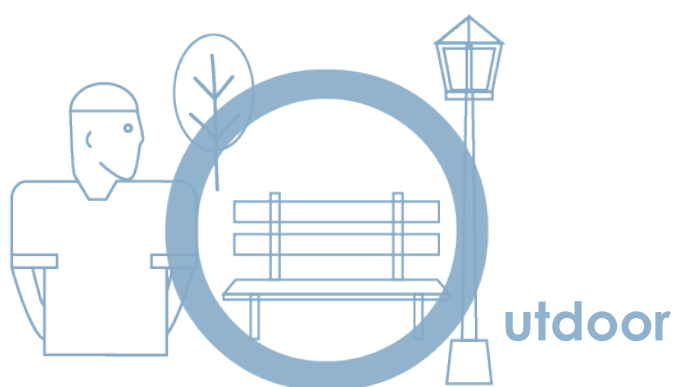



The Sapphire is an LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. The miniature size makes its appearance unobtrusive. NPT 0.5" stem with choices of mounting accessories allow installation on hard surfaces.

OPERATIONS & ELECTRICAL

Input Voltage : 100-277 Vac

Dimming : Triac dimming

Lumens per Watt : 79 LPW at 80 CRI


Beam Angle: 15°, 25°, 38°, 45°, 60°

ORDERING GUIDE

Ordering code example: AE-OD-ET7066-C10-3-15-80-NS-B-MTB

FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	ACCESSORIES	FINISH	MOUNTING
AE-OD-ET7066 Sapphire ET7066 outdoor accent light fixture		-27 2700K CCT	-15 15°				[BLANK]
	-C10 10 watts: 1002 lumens @ 24 DEG	-3 3000K CCT	-24 24°		-NS No shroud	-B ERALUX Atomic Black	-MTA Bracket A
		-4 4000K CCT	-36 36°		-AS Angled shroud	-W ERALUX Nebula White	-MTB Bracket B
	-C15 15 watts: 1291 lumens @ 24DEG	-50 50°		-80 80 CRI	-OS Straight shroud		-MTC Bracket C
		-5 5000K CCT	-5020 H 50° X V 20° beam angle			-S Silver Finish RAL9006	-MTJ Junction Box
							-MTJS Junction Box with Stake

DIMENSIONS

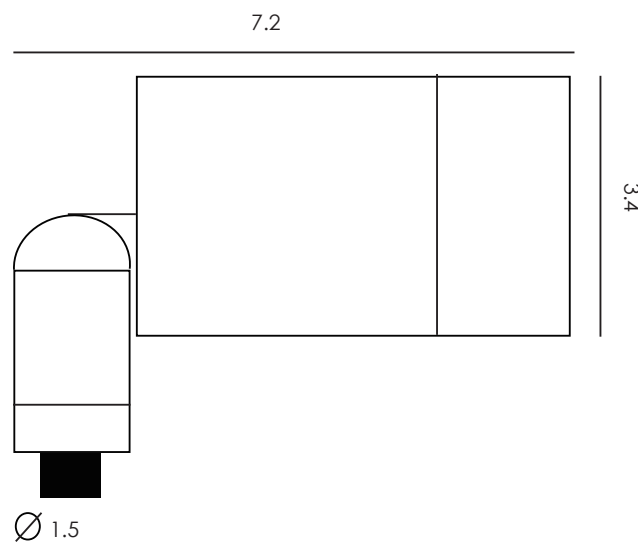



The SAPPHIRE X is an LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. This fixture comes standard with a thermoset powder coat finish that provides superior resistance to corrosion and weathering. It is also enhanced with high density tempered glass. It is available with a NPT 0.5" stem with choices of mounting accessories allow installation on hard surfaces.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : No dimming

Lumens per Watt : 57-66 LPW at 80 CRI

Beam Angle: 20°, 40°, 60°, H40 x V25


ORDERING GUIDE

Ordering code example: AE-OD-ET7069-C20-3-24-80-NS-B-MTC

SAPPHIRE X

FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	ACCESSORIES	FINISH	MOUNTING
AE-OD-ET7066 ERALUX SAPPHIRE X ET7069 outdoor accent light fixture		-27 2700K CCT	-15 15°			-B Black powder coat finish	[BLANK]
			-24 24°		-NS No shroud		-MTC Bracket C
	-C20 20 watts: 1272 lumens	-3 3000K CCT	-36 36°		-AS Angled shroud	-W White powder coat finish	-MTJ Junction Box
	-C30 30 watts" 1999 lumens	-4 4000K CCT	-50 50°	-80 80 CRI	-OS Straight shroud		-MTJS Junction Box with Stake
	-C40 40 watts: 2283 lumens	-5 5000K CCT	-5020 H 50° X V 20° beam angle			-S Silver (RAL9006) powder coat finish	

DIMENSIONS

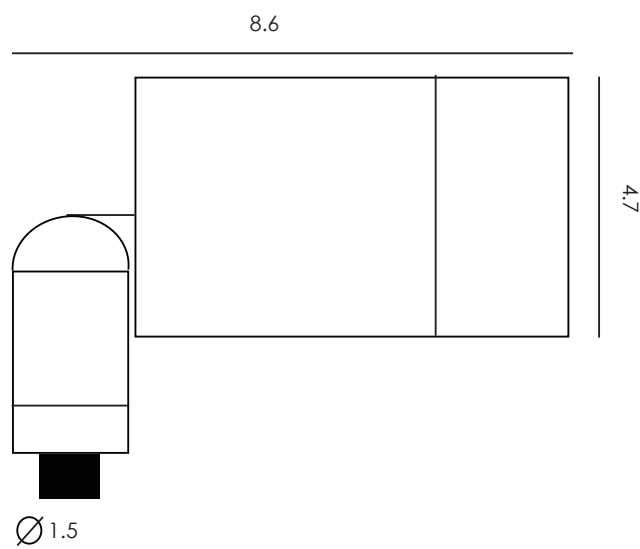



The ZORRO ELITE series is the next generation of area lights. This fixtures has selectable power and CCT. It also features different mounting methods and a variety of light distribution patters, which will allow you to tailor your outdoor lighting requirements. Our fixture comes standard with a 3 pin NEMA base as well as a 20KV SPD.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac
Dimming : 0-10V dimming
Lumens per Watt : ~130 LPW at 80 CRI
Distribution : Type 2, 3, 4, 5


ORDERING GUIDE

Ordering code example: AE-OD-ZRE-150W-CA-D-T3-A

FIXTURE FAMILY	POWER	VOLTAGE	CONTROLS	DISTRIBUTION	MOUNTING TYPE
AE-OD-ZRE ERALUX ZORRO ELITE Series Outdoor Area Light fixture in Bronze Finish	-150W* 70/100/150W power selectable; 9,100/13,000/19,500 lumens; 3000K/4000K/5000K** CCT switchable	-CA 120-347V input voltage	-D 0-10V dimming	-T3 Type 3	-A Slip Fitter
	-300W* 200/240/300W power selectable; 26,000/31,200/39,000 lumens; 3000K/4000K/5000K ** CCT switchable		-P Photocell	-T4 Type 4	-C Yoke Mount
			-MS Motion sensor	-T5 Type 5	-D No Mounting
					-E U Bracket Floodlight Mount

*Static power available upon request – Lumen output will remain the same for the listed power
**Static CCT available upon request – Lumen output will remain the same for the listed power

DIMENSIONS

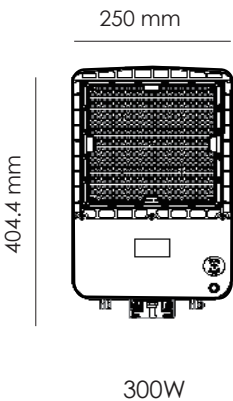

ZORRO ELITE



The Rizzuto Series combines the desire for high efficacy and a distinguished look in an outdoor luminaire. The Rizzuto Series' mounting methods and variety of light distribution patterns, allows you to tailor your luminaire to your lighting needs. With power options reaching up to 39,000 lumens, the Rizzuto outdoor luminaire shows that performance and functionality can be simultaneously achieved. Our fixture comes standard with a 3 pin NEMA base as well as a 20KV SPD.

OPERATIONS & ELECTRICAL



Input Voltage : 120-277 Vac, 277-480 Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 130 LPW at 70 CRI


Distribution : Types 2, 3, 4, 5

DIMENSIONS

AE-OD-RZ-100W, AE-OD-RZ-150W

AE-OD-RZ-200W, AE-OD-RZ-300W

RIZZUTO

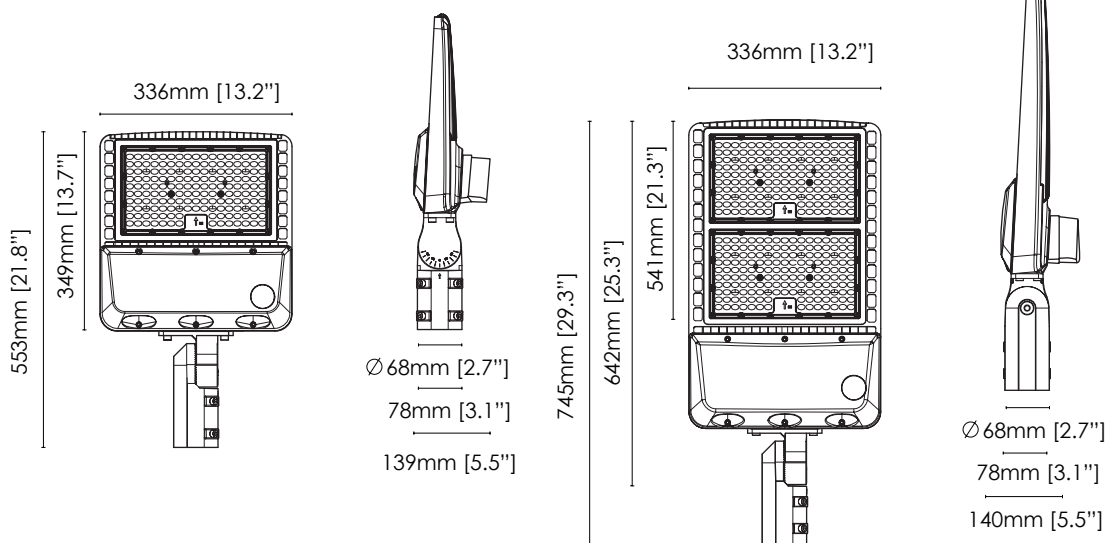

ORDERING GUIDE

Ordering code example: AE-OD-RZ-100W-7-40-D-U-T4-D-BK

FIXTURE FAMILY	POWER	CRI	CCT	CONTROLS	VOLTAGE	DISTRIBUTION	MOUNTING TYPE	FINISH
AE-OD-RZ ERALUX Rizzuto Series outdoor area light fixture	-100W 100 Watts: 13,000 lumens	-7 70 CRI	-22 2200K CCT	-D 0-10V external dimming down to 10%	U 100-277V input voltage range	-T2 Type 2	-A Slip Fitter	-BK Black powder coat finish
	-150W 150 Watts: 19,500 lumens		-30 3000K CCT				-B Direct Bracket	-BZ Bronze powder coat finish
	-200W 200 Watts: 26,000 lumens		-40 4000K CCT				-C Trunnion	-WH ERALUX Nebula white powder coat finish*
	-240W 240 Watts: 31,200 lumens		-50 5000K CCT	-P Photocontrol daylight sensor	H 277-480V input voltage range	-T3 Type 3	-D No Mounting	-AL Aluminum (RAL9006) powder coat finish*
	-300W 300 Watts: 39,000 lumens						-E U Bracket for Floodlight Option	
							-F Yoke Mount	

*Contact for details on leadtime and availability



The GENESYS Series from ERALUX combines the desire for high efficacy and a distinguished look in an outdoor luminaire. The GENESYS Series features mounting methods and variety of light distribution patterns, allowing you to tailor your luminaire to your lighting needs. Our fixture comes standard with a 3 pin NEMA base as well as a 20KV SPD.

GENESYS

OPERATIONS & ELECTRICAL



Input Voltage : 120-277 Vac, 277-480 Vac

Dimming : 0-10V

Lumens per Watt : 90 LPW at 90 CRI

Distribution : T2, T3 (rotated left or right available), T4, T5

ORDERING GUIDE

Ordering code example: AE-OD-GY-100UV-D-40-T2-A-BK

FIXTURE FAMILY	POWER	VOLTAGE	CONTROLS	CCT	DISTRIBUTION	MOUNTING TYPE	FINISH
AE-OD-GY ERALUX GENESYS Series Outdoor Area Light fixture	-80 80 Watts: 10,500 lumens	UV 120-277V input voltage	-D 0-10V dimming	-22 2200K CCT	-T2 Type 2	-A Slip Fitter	-BK Black finish
	-100 100 Watts: 13,500 lumens		-P Photocontrol daylight sensor	-30 3000K CCT	-T3N Type 3 forward	-B Direct Bracket	-BZ Bronze finish
	-150 150 Watts: 20,250 lumens	HV 277-480V input voltage	-M Microwave controller *Only for 120-277V	-40 4000K CCT	-T3L Type 3 left	-C Yoke Mount	-WH White finish
	-200 200 Watts: 27,000 lumens		-50 5000K CCT	-T3R Type 3 right	-D No Mounting	-AL Aluminum (RAL9006) powder coat finish*	
	-240 240 Watts: 32,400 lumens		-T4 Type 4				
	-300 300 Watts: 40,500 lumens			-T5 Type 5			


*Contact for details on lead time and availability

DIMENSIONS

100W/150W/200W


Slip Fitter mounting

575mm/618mm [22.63i/24.33i]

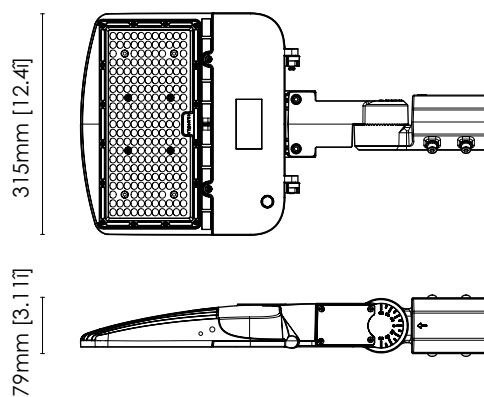


Yoke mounting

482mm/525mm [18.96i/20.66i]

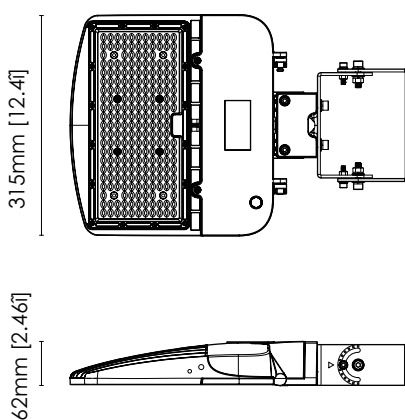

Direct mounting


462mm/505mm [18.17i/19.87i]

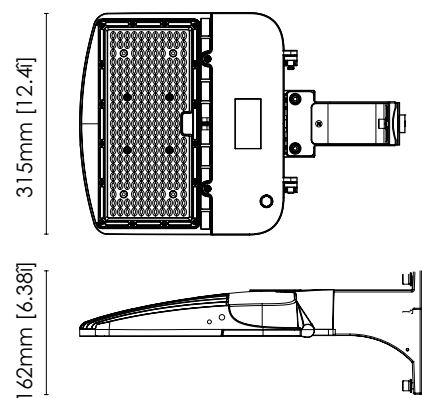

No mounting

334mm/377mm [13.14i/14.84i]


290mm/333mm [11.41i/13.11i]

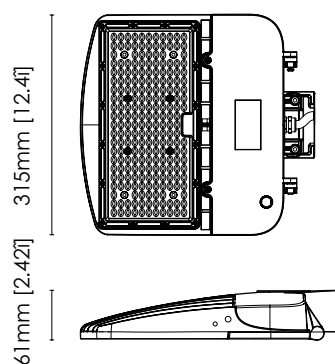

240W/300W


Slip Fitter mounting

818mm [32.21i]

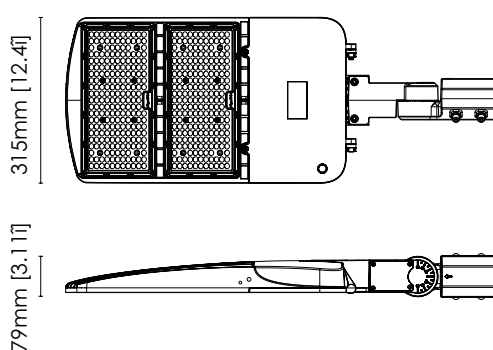


Yoke mounting

725mm [28.54i]

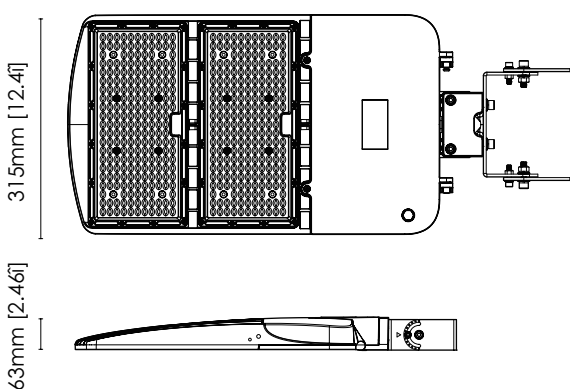

Direct mounting


705mm [27.75i]

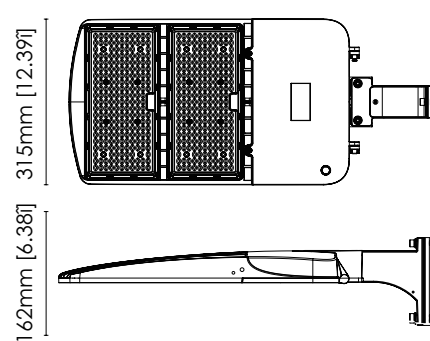

No mounting

577mm [22.72i]

533mm [20.99i]

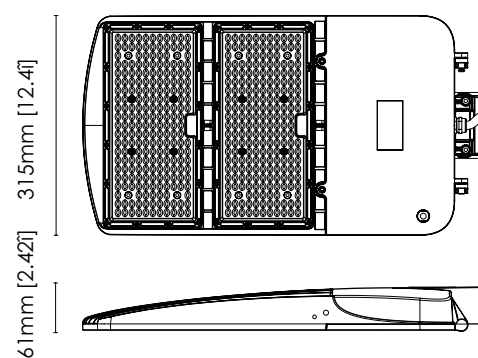



Shredder is a flat louvered top round bollard that features outstanding photometric performance, uniform illumination, lowprofile design, high efficacy, long lifespan, and easy installation. It is made of die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Shredded is designed for landscape lighting places, and it is suitable for all kinds of indoor and outdoor garden environment lighting. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V Dimming

Protection: IP65 rated, Surge Protector 10KV


ORDERING GUIDE

Ordering code example: AE-OD-SH-CA-24W-TCP-70-BK

FIXTURE FAMILY	INPUT VOLTAGE	POWER	CCT	CRI	HOUSING & FINISH
AE-OD-SH Outdoor products Shredder Bollard Fixture	-CA 120-347 Vac	-24W Power switchable 24/19/14W 3600/2850/2100lm	-TCP CCT Selectable 3000/4000/5000K	-70 70 CRI	-BK powder coat black

SHREDDER

DIMENSIONS

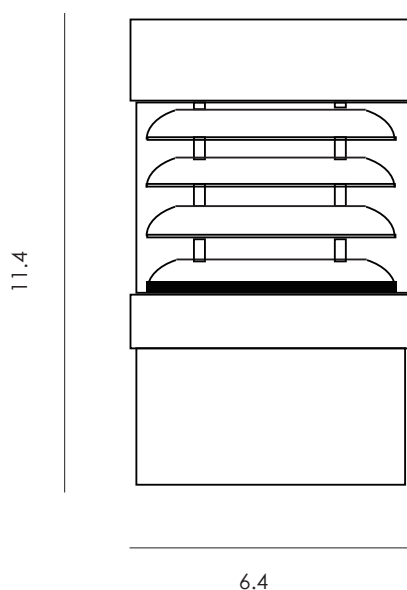



Bebop is a dome louvered top Round bollard that features outstanding photometric performance, uniform illumination, lowprofile design, high efficacy, long lifespan, and easy installation. It is made of die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Shredder is designed for landscape lighting places, and it is suitable for all kinds of indoor and outdoor garden environment lighting, These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V Dimming


Protection: IP65 rated, Surge Protector 10KV

ORDERING GUIDE

Ordering code example: AE-OD-BE-CA-24W-TCP-70-BK

FIXTURE FAMILY	INPUT VOLTAGE	POWER	CCT	CRI	FINISH
AE-OD-BE Outdoor products Shredder Bollard Fixture	-CA 120-347Vac	-24W Power switchable 24/19/14W 3600/2850/2100lm	-TCP CCT Selectable 3000/4000/5000K	-70 CRI	-BK Powder coat black

DIMENSIONS

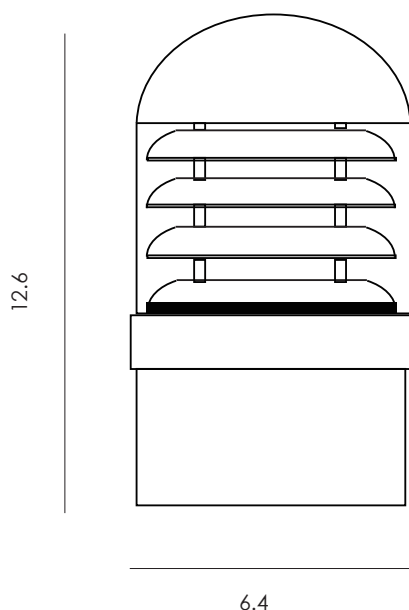

BEBOP



Rocksteady is a round bollard with cone reflector dome head that features outstanding photometric performance, uniform illumination, low-profile design, high efficacy, long lifespan, and easy installation. It is made of die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Shredded is designed for landscape lighting places, and it is suitable for all kinds of indoor and outdoor garden environment lighting, These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V Dimming

Protection: IP65 rated, Surge Protector 10KV


ORDERING GUIDE

Ordering code example: AE-OD-RS-CA-24W-TCP-70-BK

FIXTURE FAMILY	INPUT VOLTAGE	POWER	CCT	CRI	HOUSING & FINISH
AE-OD-RS Outdoor products Rocksteady Bollard Fixture	-CA 120-347 Vac	-24W Power switchable 24/19/14W 3600/2850/2100lm	-TCP CCT Selectable 3000/4000/5000K	-70 70 CRI	-BK powder coat black

ROCKSTEADY

DIMENSIONS

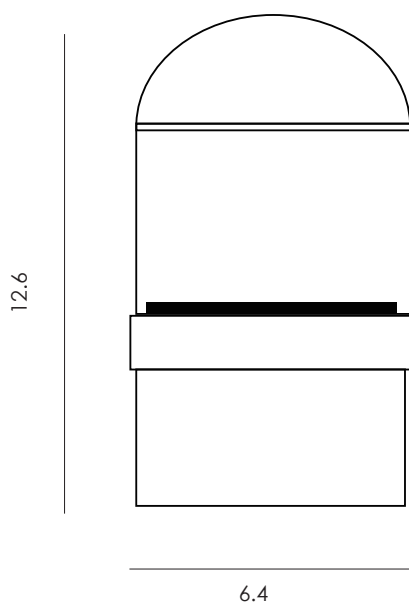



Krang is a square bollard with cone reflector flat head that features outstanding photometric performance, uniform illumination, low-profile design, high efficacy, long lifespan, and easy installation. It is made of die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Shredded is designed for landscape lighting places, and it is suitable for all kinds of indoor and outdoor garden environment lighting. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V Dimming


Protection: IP65 rated, Surge Protector 10KV

ORDERING GUIDE

Ordering code example: AE-OD-KR-CA-24W-TCP-70-BK

FIXTURE FAMILY	INPUT VOLTAGE	POWER	CCT	CRI	FINISH
AE-OD-KR Outdoor products Krang Bollard Fixture	-CA 120-347Vac	-24W Power switchable 24/19/14W 3600/2850/2100lm	-TCP CCT Selectable 3000/4000/5000K	-70 70 CRI	-BK Powder coat black

DIMENSIONS

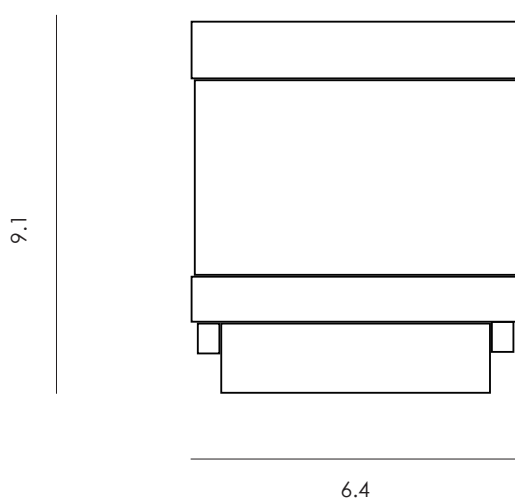

KRANG



Baxter is a round bollard with cone reflector flat head that features outstanding photometric performance, uniform illumination, low-profile design, high efficacy, long lifespan, and easy installation. It is made of die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Shredded is designed for landscape lighting places, and it is suitable for all kinds of indoor and outdoor garden environment lighting. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V Dimming


Protection: IP65 rated, Surge Protector 10KV

ORDERING GUIDE

Ordering code example: AE-OD-BX-CA-24W-TCP-70-BK

FIXTURE FAMILY	INPUT VOLTAGE	POWER	CCT	CRI	HOUSING & FINISH
AE-OD-BX Outdoor products Baxter Bollard Fixture	-CA 120-347 Vac	-24W Power switchable 24/19/14W 3600/2850/2100lm	-TCP CCT Selectable 3000/4000/5000K	-70 70 CRI	-BK powder coat

DIMENSIONS

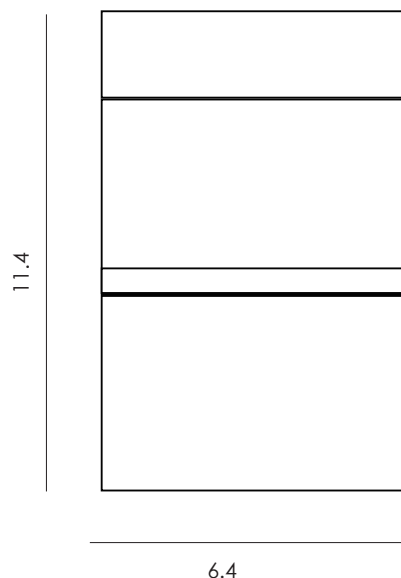



Casey is a round bollard that features outstanding photometric performance, uniform illumination, low-profile design, high efficacy, long lifespan, and easy installation. It is made of die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Shredded is designed for landscape lighting places, and it is suitable for all kinds of indoor and outdoor garden environment lighting. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V Dimming

Protection: IP65 rated, Surge Protector 10KV


ORDERING GUIDE

Ordering code example: AE-OD-CS-CA-24W-TCP-70-BK

FIXTURE FAMILY	INPUT VOLTAGE	POWER	CCT	CRI	FINISH
AE-OD-CS Outdoor products Casey Bollard Fixture	-CA 120-347Vac	-24W Power switchable 24/19/14W 3600/2850/2100lm	-TCP CCT Selectable 3000/4000/5000K	-70 70 CRI	-BK Powder coat black

CASEY

DIMENSIONS

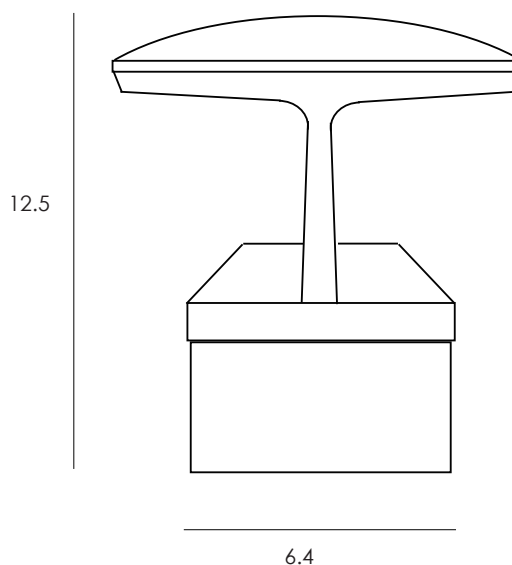



April is a solar powered led bollard with High efficiency Mono-crystalline solar panel and off grid connectivity. This bollard Light presents a contemporary, architectural day form providing superior uniform illumination designed to enhance urban spaces with beautiful visual appearance. It comes in one size 36" and one distribution T5W. It has PWM controller to last longer.

OPERATIONS & ELECTRICAL

Battery: LiFePO4 battery

Lumens per watt: 130 LPW at 80CRI

Distribution: Type V

Charging time: 8 hours

Operating time:

11 hours Normal mode

2-3 days intelligent mode


APRIL

ORDERING GUIDE

Ordering code example: AE-OD-AP-3W-36-30-80-T5W-BK

FIXTURE FAMILY	POWER	HEIGHT	CCT	CRI	DISTRIBUTION	HOUSING & FINISH
AE-OD-AP Outdoor products April Solar Bollard Fixture	-3W 3-watt power	-36 36 inches height	-30 3000K	-80 80 CRI	-T5W T5 wide distribution 105 LPW: 340 lms	-BK powder coat black RAL9017
			-40 4000K			
			-50 5000K			

DIMENSIONS

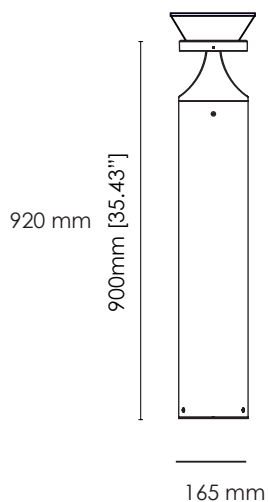



The SPLINTER bollard is an elegant solution for your outdoor area lighting needs. Its robust and strong materials allow it to withstand the harshest of elements without a scratch. The SPLINTER features an innovative optical system providing illumination to your space while keeping the beam shielded from the eye. The unique "smiley face" design stands out in the environment.

OPERATIONS & ELECTRICAL



Input Voltage : 120-277 Vac

Dimming : 0-10V Dimming

Distribution : Type 5


ORDERING GUIDE

Ordering code example: AE-OD-ST-24UV-830-35-BK

FIXTURE FAMILY	POWER	CCT	SIZE	HOUSING & FINISH
AE-OD-ST Outdoor products SPLINTER Bollard Fixture	-14UV 14 watts; 1,680 lumens 120-277V	-830* 3000K CCT, 80 CRI	-35 35" height 6.5" diameter	-BK powder coat graphite black aluminum-cast housing
	-24UV 24 watts; 2,880 lumens 120-277V	-840* 4000K CCT, 80 CRI		
		-850* 5000K CCT, 80 CRI		

*Only products with 3000K CCT or lower are DarkSky approved

DIMENSIONS

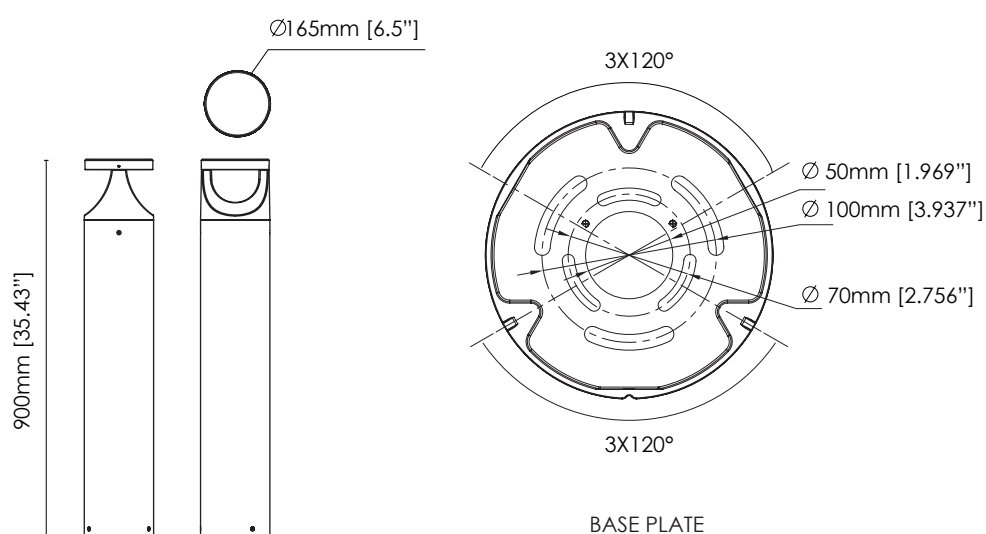



The RAPHAEL bollard is an elegant solution for your outdoor area lighting needs. Its robust and strong materials allow it to withstand the harshest of elements without a scratch. The Raphael features an innovative optical system providing illumination to your space while keeping the beam shielded from the eye.

OPERATIONS & ELECTRICAL



Input Voltage : 120-240 Vac & 120-277 Vac

Protection: IP65, thermally-insulated driver, Marine Finish

ORDERING GUIDE


Ordering code example: AE-OD-RL23-C10-42-8-3-80-B-M

FIXTURE FAMILY	POWER & SIZE	CCT	CRI	HOUSING & FINISH
AE-OD-RL23 Outdoor products Raphael Bollard Fixture	-C10-32-6 120-277V 10 watts: 267 lumens 32" height; 6" diameter	-3 3000K CCT		-B-M Thermoset powder coat graphite black aluminum-cast housing with marine corrosion resistant finish
	-C20-42-8 120-277V 20 watts: 796 lumens 42" height; 8" diameter *1-10V Dimming for 20W option only	-4 4000K CCT	-80 80 CRI	-Z-M Thermoset powder coat mineral bronze aluminum-cast housing with marine corrosion resistant finish
	-C35-42-8 120-277V 35 watts: 1273 lumens 42" height; 8" diameter	-5 5000K CCT		-W-M ERALUX nebula white thermoset cast housing with marine corrosion resistant finish*
AE-OD-RL24 Outdoor products Raphael Bollard Fixture				-S-M Aluminum (RAL9006) thermoset cast housing with marine corrosion resistant finish*

*Contact for leadtimes and availability

DIMENSIONS

140/200/200mm [5.5"/7.87"/7.87"]

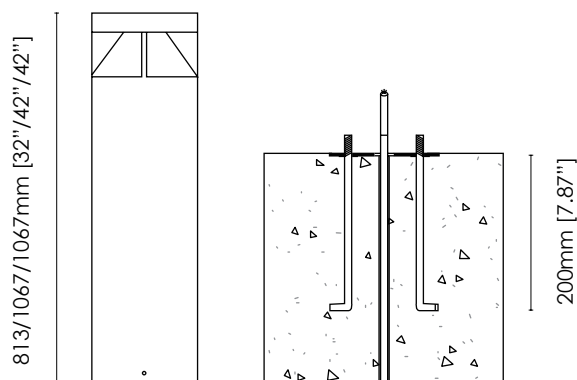



The Leonardo Bollard is an elegant solution for your outdoor area lighting needs. Its robust and strong materials allow it to withstand the harshest of elements without a scratch. The Leonardo features an innovative optical system providing illumination to your space while keeping the beam shielded from the eye.

OPERATIONS & ELECTRICAL



Input Voltage : 120-240 Vac & 120-277 Vac

Protection: IP65, thermally-insulated driver, Marine Finish

ORDERING GUIDE


Ordering code example: AE-OD-LD35-C5-32-6-3-80-B-M

FIXTURE FAMILY	POWER & SIZE	CCT	CRI	HOUSING & FINISH	OPTION
AE-OD-LD35 Outdoor products Leonardo Bollard Fixture	-C5-32-6 120-277V 5 watts: 168 lumens 32" height 6" diameter	-3 3000K CCT	-80 80 CRI	-B-M Thermoset powder coat graphite black aluminum-cast housing with marine corrosion resistant finish	
				-Z-M Thermoset powder coat mineral bronze aluminum-cast housing with marine corrosion resistant finish	[BLANK] No option
AE-OD-LD36 Outdoor products Leonardo Bollard Fixture	-C15-42-8 120-277V 15 watts: 402 lumens 42" height 8" diameter *1-10V Dimming for 20W option only	-4 4000K CCT	-5 5000K CCT	-W-M ERALUX nebula white thermoset cast housing with marine corrosion resistant finish*	-GC GFCI Outlet Option
				-S-M Aluminum (RAL9006) thermoset cast housing with marine corrosion resistant finish*	

*Contact for leadtimes and availability

DIMENSIONS

140mm/200mm [5.5"/7.87"]

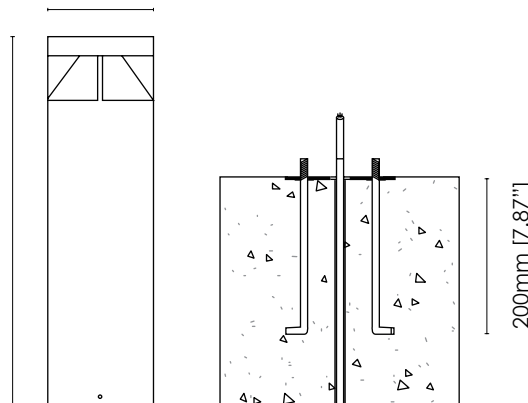

LEONARDO



The MICHELANGELO bollard is an elegant solution for your outdoor area lighting needs. Its robust and strong materials allow it to withstand the harshest of elements without a scratch. Michelangelo features an innovative optical system providing illumination to your space while keeping the beam shielded from the eye.

OPERATIONS & ELECTRICAL



Input Voltage : 120-240 Vac & 120-277 Vac

Protection: IP65, thermally-insulated driver, Marine Finish

ORDERING GUIDE


Ordering code example: AE-OD-ML27-C10-33-6-3-80-B-M

FIXTURE FAMILY	POWER & SIZE	CCT	CRI	HOUSING & FINISH	OPTION
MICHELANGELO AE-OD-ML27 Outdoor products Michelangelo Bollard Fixture	-C10-33-6 120-277V 10 watts: 400 lumens 33" height; 6" diameter	-3 3000K CCT		-B-M Thermoset powder coat graphite black aluminum-cast housing with marine corrosion resistant finish	
	-C20-44-8 120-277V 20 watts: 1225 lumens 44" height; 8" diameter	-4 4000K CCT	-80 80 CRI	-Z-M Thermoset powder coat mineral bronze aluminum-cast housing with marine corrosion resistant finish	-BLANK No Option
	-C35-44-8 120-277V 32 watts: 1960 lumens 44" height; 8" diameter	-5 5000K CCT		-W-M ERALUX nebula white thermoset cast housing with marine corrosion resistant finish*	-GC GFCI Outlet Option
				-S-M Aluminum (RAL9006) thermoset cast housing with marine corrosion resistant finish*	

*Contact for leadtimes and availability

DIMENSIONS

140/200/200mm [5.5"/7.87"/7.87"]

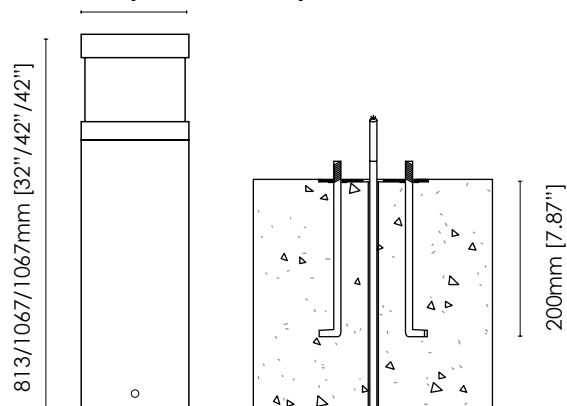



The DONATELLO bollard is an elegant solution for your outdoor area lighting needs. Its robust and strong materials allow it to withstand the harshest of elements without a scratch. The Donatello features an innovative optical system providing illumination to your space while keeping the beam shielded from the eye.

OPERATIONS & ELECTRICAL



Input Voltage : 120-240 Vac & 120-277 Vac

Protection: IP65, thermally-insulated driver, Marine Finish

ORDERING GUIDE


Ordering code example: AE-OD-DN25-C10-32-6-3-80-B-M

FIXTURE FAMILY	POWER & SIZE	CCT	CRI	HOUSING & FINISH
AE-OD-DN25 (400 lumens) Outdoor products Donatello Bollard Fixture	-C10-32-6 120-277V 10 watts: 400 lumens 32" height; 6" diameter	-3 3000K CCT	-80 80 CRI	-B-M Thermoset powder coat graphite black aluminum-cast housing with marine corrosion resistant finish
	-C20-42-8 120-277V 20 watts: 1000 lumens 42" height; 8" diameter	-4 4000K CCT		-Z-M Thermoset powder coat mineral bronze aluminum-cast housing with marine corrosion resistant finish
	-C35-42-8 120-277V 35 watts: 1750 lumens 42" height; 8" diameter	-5 5000K CCT		-W-M ERALUX nebula white thermoset cast housing with marine corrosion resistant finish*
AE-OD-DN26 Outdoor products Donatello Bollard Fixture				-S-M Aluminum (RAL9006) thermoset cast housing with marine corrosion resistant finish*

*Contact for leadtimes and availability

DIMENSIONS

140/200/200mm [5.5"/7.87"/7.87"]

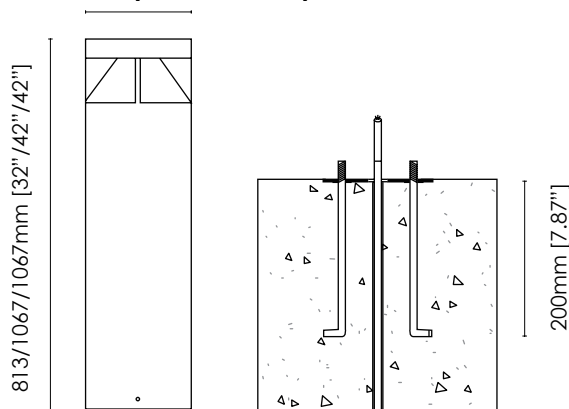



Tron is designed as a parking garage fixture, directly customizable in a variety of power and CCT options for your lighting application needs. The curved lens features a 150° shaped beam with high light reflectivity reflectors. Its robust and durable design allow it to withstand the outdoor elements wherever placed.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac
Protection: Wet location, IP65


ORDERING GUIDE

Ordering code example: AE-OD-TR-80W-RG-H-TCP-BZ

FIXTURE FAMILY	POWER	EFFICIENCY	INPUT VOLTAGE	CCT	CONTROL	MOUNTING	FINISH
AE-OD-TR ERALUX TRON Series Outdoor round canopy fixture.	-80W Switchable 80/60/45W 9600/7200 /5400lm	-RG-H Round garage canopy with high efficiency 120LPW	-MV Input voltage CA 120-437V	-TCP Switchable 3000K/4000K /5000K CCT	[BLANK] -MS Microwave Motion Sensor -P Photocell	[BLANK] Surface mount and Pendant mount by a pole -U U-bracket mounting	-BZ Bronze powder coat finish -WH White powder coat finish

TRON

DIMENSIONS

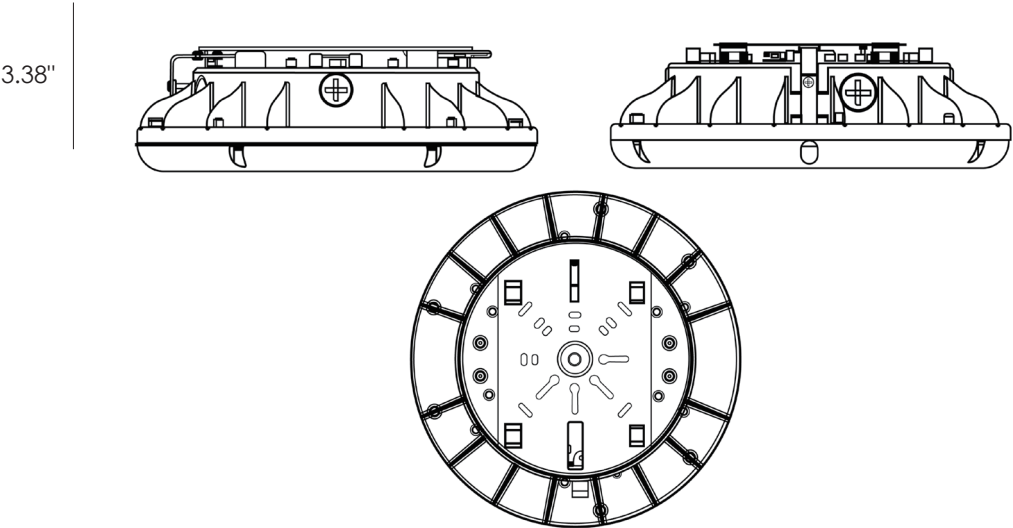



GRETA is a parking garage fixture that enables customization on-site with the CCT and lumens switchable capability. Its robust and durable design allows it to withstand the outdoor elements wherever placed. Furthermore, the GRETA series comes standard in 120-347 Vac, ready for surface mount, and pole mount and even enables surface connection of EMTs.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac

Dimming : 0-10V Dimming

Protection: LED fixture IP65 rated


ORDERING GUIDE

Ordering code example: AE-OD-GR-70W-30K/40K/50K-G-TCP-CA

FIXTURE FAMILY	POWER	CCT	TUNABLE	VOLTAGE	CONTROL
AE-OD-GR ERALUX GRETA outdoor canopy light fixture	-40W Switchable 28/35/40W 3360lms/4200lms/5400lms	-30K/40K/50K Switchable 3000K/4000K /5000K CCT	-G-TCP Tunable CCT and Power	-CA 120-347V	[BLANK]
	-70W Switchable 45W/60W/70W 5400lms/ 7200lms/8400lms				-MS Motion Sensor
					-P Photocell

GRETA

DIMENSIONS

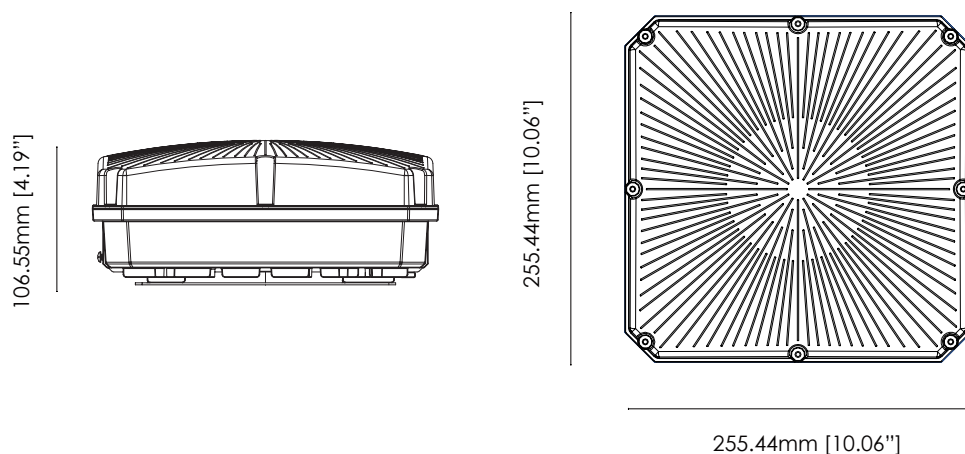



Introducing the Ida Series, with its sleek and distinguished high-quality look for our outdoor flood fixture. Made with robust die-casting aluminum and tempered glass optical lenses, being IP65 rated, the Ida series can withstand the harshest of outdoor elements. It also allows flexibility on the field with its CCT and power selectable options, perfect for lighting spaces such as gardens, balconies, public areas and other outdoor areas.

OPERATIONS & ELECTRICAL



Input Voltage :120-347 Vac

Dimming : 0-10V dimming

Lumens per Watt : ~140 LPW at 80 CRI and 4000K


ORDERING GUIDE

Ordering code example: AE-OD-ID-35S-CA-8SC1-010-A-BZ

FIXTURE FAMILY	POWER	INPUT VOLTAGE	CRI	CCT	DIMMING	MOUNTING	FINISH
AE-OD-ID ERALUX IDA Series outdoor flood light fixture	-35S 15/25/35W selectable	-CA 120V-347V input voltage	-8 Ra > 80	SC1 3000K/4000K/5000K CCT selectable	-010 0 – 10V dimming	-A Knuckle Mounted	-BZ Bronze Finish
	-80S 45/60/80W selectable					-B Trunion Mounted	
						-E No Brackets	

IDA

DIMENSIONS

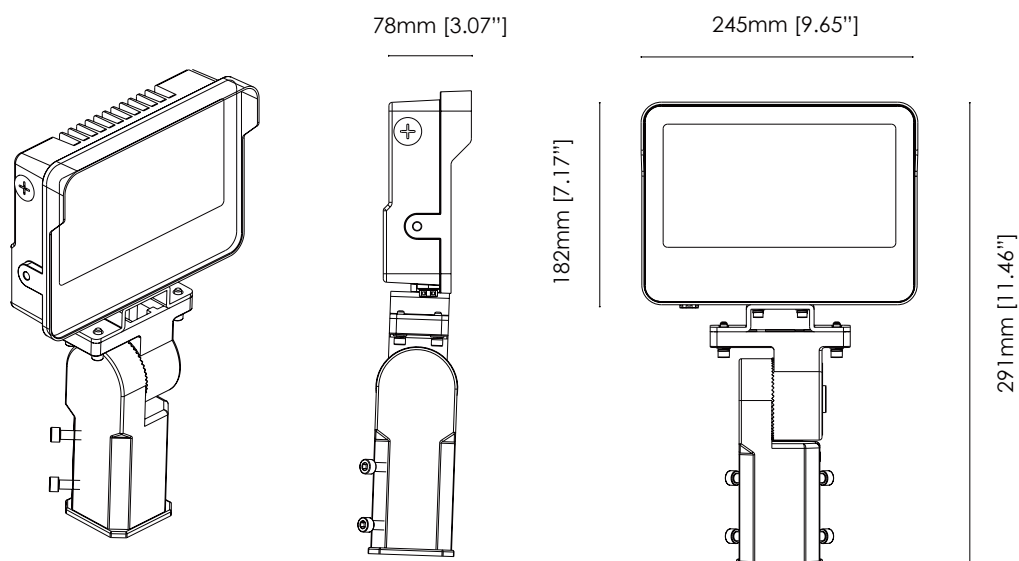





The LOKI POST LIGHT is ideal for both security and to enhance your space decoratively whether the application be a garden, parking lot, walkway or even a park. The smooth twin strut design provide not only stability but also an aesthetic look. The POST TOP LIGHT is designed for outdoor use as an efficient solution to your outdoor project needs. It provides direct downlight to comply with new industry standards and regulations. LOKI has a high output efficiency up to 150lm/w and selectable CCT and power, as well as the tool-less maintenance features, allowing extraordinary design flexibility for different application scenarios. The Dark LOKI comes with a pre-installed shield.

OPERATIONS & ELECTRICAL



Input Voltage : 120-347 Vac, 50/60Hz

Dimming : 0-10 dimming, Photocell, Motion Sensor

Lumens per Watt : 150 LPW at 70 CRI


Distribution : Type 5 (150x150°)

ORDERING GUIDE

Ordering code example: AE-OD-ST40-060-TCP-010-TA-BK

FIXTURE FAMILY	POWER	CCT	CONTROL	MOUNTING	FINISH
LOKI DARK LOKI	-060 Power Selectable: 60/45/30/18 Watts 7800/5850/3900/2340 lumens	-TCP Tunable CCT power 3000/4000/5000K CCT Switchable		-TA Twin arm -SA Single arm -SUS Pendant mount bracket -GN Gooseneck mount bracket -SMT Surface mount bracket -SF Slip fitter -DI Direct mount bracket	
	AE-OD-ST40- ERALUX Loki Series Outdoor Top Post Light Fixture		-010 0-10V dimming -PC Photocell -MS Motion Sensor		-BK Black Finish -SV Silver Finish
	-060 Power Selectable: 60 Watts 7800 lumens	-30K 3000K Dark Loki Dark shield			
	AE-OD-ST40 ERALUX Dark Loki Series Outdoor Top Post Light Fixture				

DIMENSIONS

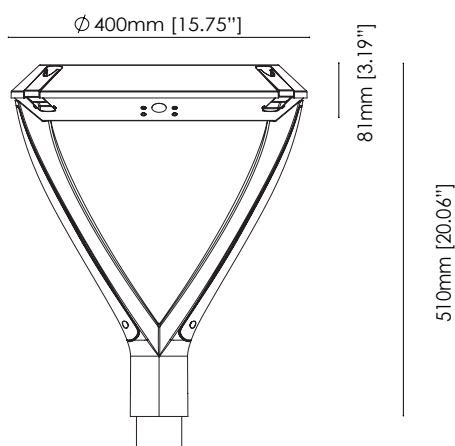



The Chronos differentiates itself from other outdoor cylinders through its elegant hourglass design. This wall wash up and down sconce light has IK08 protection and IP66 rated with its powder coating finish.

OPERATIONS & ELECTRICAL



Input Voltage : 100-347 Vac

Dimming : 0-10 dimming



Lumens per Watt : 100 LPW at 80 CRI

ORDERING GUIDE

Ordering code example: : AE-OD-CR-060-8030/40/50-1515-CA-BZ

FIXTURE FAMILY	POWER	CRI	CCT	UP	DOWN	VOLTAGE	CONTROL	FINISH
CHRONOS ERALUX CHRONOS outdoor surface mounted sconce fixture	-060 Power Selectable: 18W/30W/45W/ 60W	-80 80 CRI	30/40/50 3000K/4000K /5000K CCT selectable	-30 30° up angle	-30 30° down angle	-CA 120-347V	[BLANK] 0-10V dimming	-BZ Bronze powder coat
							-PH Photocell control	-BK Black powder coat

DIMENSIONS

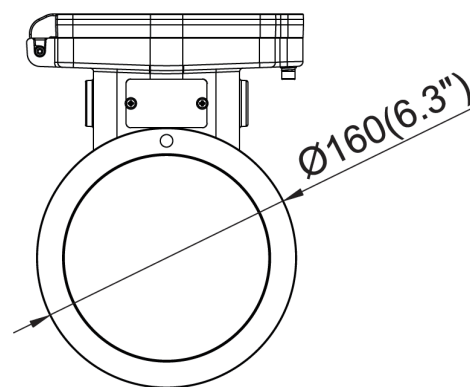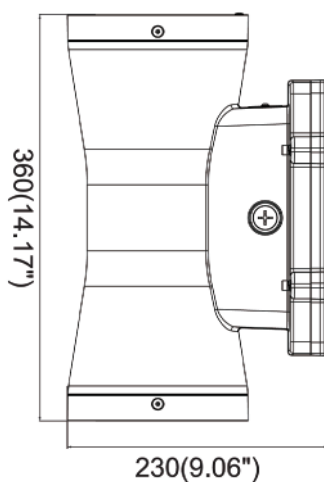



The Thalassa Eco outdoor wall mounted cylindrical LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 90 LPW providing performance as well as elegance in the install environment. This product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality. It is Power /CCT adjustable in field with multiple design of beam angles.

OPERATIONS & ELECTRICAL


Input Voltage : 120-277 Vac
 Dimming : 0-10 dimming
 Lumens per Watt : 90 LPW at >70 CRI

ORDERING GUIDE

Ordering code example: AE-OD-TE-30TCPBK-1515D

FIXTURE FAMILY	SHAPE	CCT	FINISH	UP BEAM	LOWER BEAM	CONTROL
AE-OD-TE ERALUX Thalassa Eco outdoor wall mounted sconce fixture	-30 Power selectable 10/20/30 WATTS	TCP CCT Selectable 30/40/50K	BK Black powder coat finish BZ Bronze powder coat finish	15 15° beam angle	15 15° beam angle	D 0-10V Dimming EM Emergency Battery Back Up
				23 23° beam angle	23 23° beam angle	
				35 35° beam angle	35 35° beam angle	
				45 45° beam angle	45 45° beam angle	
				60 60° beam angle	60 60° beam angle	

DIMENSIONS

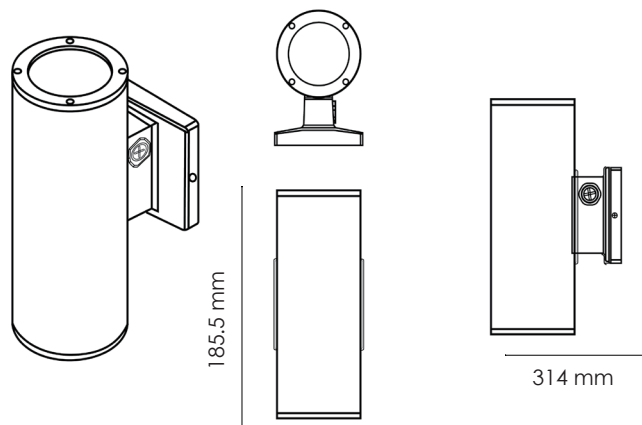



The Thalassa outdoor surface-mounted cylindrical LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 70 LPW providing performance as well as elegance in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming down to 10% (with DMG option)


Lumens per Watt : 70 LPW at 80 CRI

ORDERING GUIDE

Ordering code example: ET6020-C24-3-10-80-W-DMG

FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	FINISH	CONTROL
ET6020 ERALUX Thalassa ET6020 outdoor surface mounted sconce fixture	-C24 24 watts: 1680 lumens	-3 3000K CCT	-10 10° beam angle	-80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%
			-25 25° beam angle			
			-38 38° beam angle			
		-4 4000K CCT	-45 45° beam angle			
			-60 60° beam angle			
	-C40 40 watts: 2800 lumens	-3 3000K CCT	-08 8° beam angle	-S Silver powder coat finish (RAL9006)	-W White powder coat finish	
			-18 18° beam angle			
			-36 36° beam angle			
		-4 4000K CCT	-62 62° beam angle			

DIMENSIONS

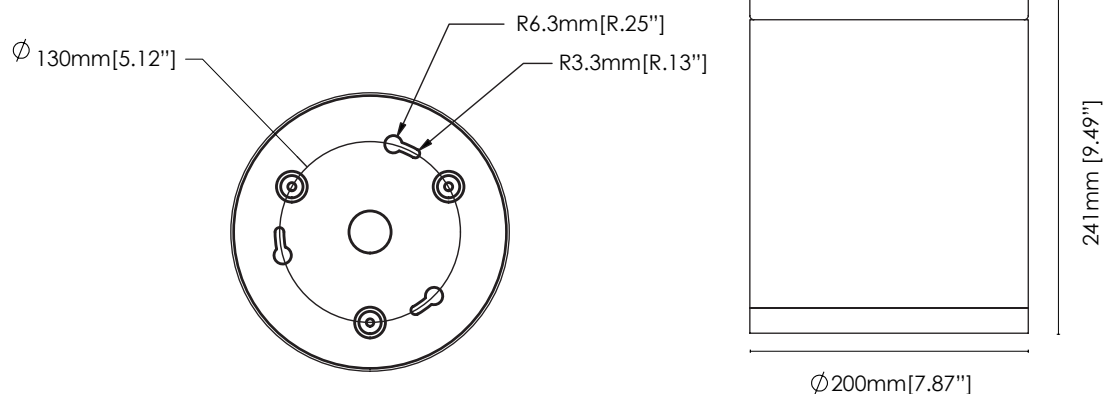



The Thalassa outdoor cylindrical LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa can be mounted to offer either uplight only or downlight only and offers an elegant look in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Lumens per Watt : 70 LPW at 80 CRI


Dimming : 0-10V external dimming down (DMG option)

ORDERING GUIDE

Ordering code example: ET6022D-C24-3-25-80-B-DMG

FIXTURE FAMILY	LIGHT DIRECTION	POWER	CCT	BEAM ANGLE	CRI	FINISH	CONTROL
ET6022 ERALUX Thalassa ET6022 outdoor surface mounted sconce fixture	D Down light	-C24 24 watts: 1680 lumens	-3 3000K CCT	-10 10° beam angle	-80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%
				-25 25° beam angle			
				-38 38° beam angle			
				-45 45° beam angle			
				-60 60° beam angle			
				-6 6000K CCT			
	U Up light	-C40 40 watts: 2800 lumens	-3 3000K CCT	-08 8° beam angle	-80 80 CRI	-S Silver (RAL9006) powder coat finish	-DMG 0-10V external dimming down to 10%
				-18 18° beam angle			
				-36 36° beam angle			
				-5 5000K CCT			
				-62 62° beam angle			
				-4 4000K CCT			

DIMENSIONS

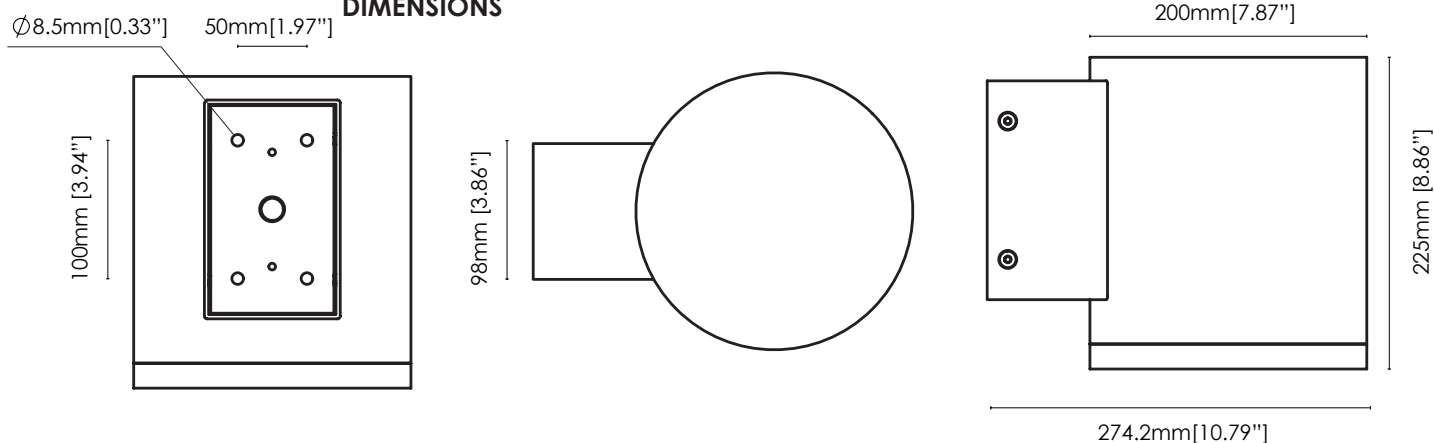



The Thalassa ET6024 outdoor cylindrical LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 79 LPW providing performance as well as elegance in the install environment. With both up-light and downlight, this fixture can provide the necessary illumination while providing exceptional finesse.


OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming down to 10% (with DMG option)

Lumens per Watt : 79 LPW at 80 CRI

DIMENSIONS

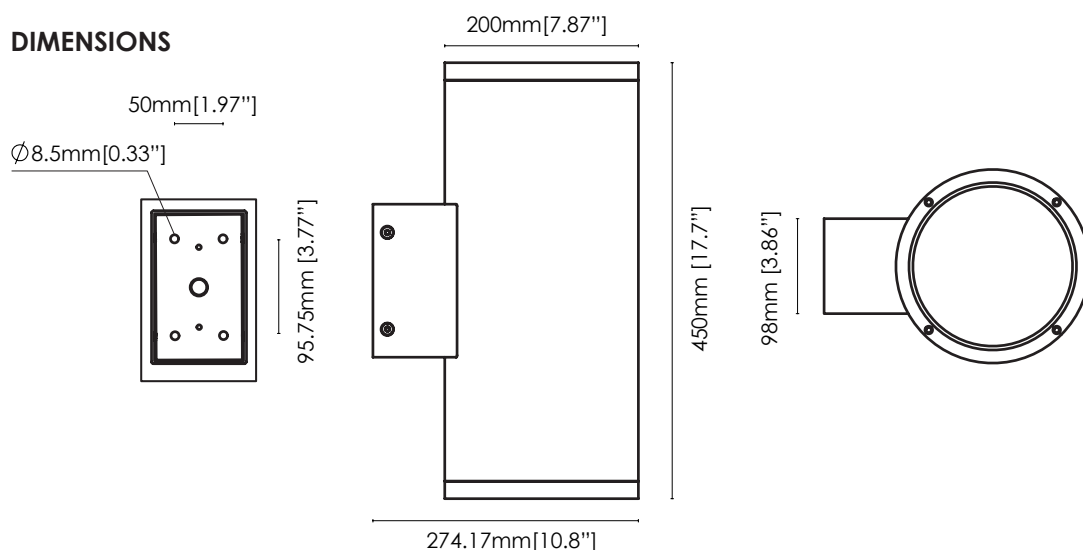

THALASSA ET6024

ORDERING GUIDE

Ordering code example: ET6024-C48-3-1060-80-W-DMG

FIXTURE FAMILY	POWER	CCT	UP LIGHT BEAM ANGLE	DOWN LIGHT BEAM ANGLE	CRI	FINISH	CONTROL
ET6024 ERALUX Thalassa ET6024 outdoor surface mounted sconce fixture	-C48 24 watts: 1896 lumens x 2 (up light & downlight)	-3 3000K CCT	-10 Up Light 10°	10 Down Light 10°	-80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%
		-4 4000K CCT	-25 Up Light 25°	25 Down Light 25°		-W White powder coat finish	
		-6 6000K CCT	-38 Up Light 38°	38 Down Light 38°		-S Silver powder coat finish (RAL9006)	
			-45 Up Light 45°	45 Down Light 45°			
			-60 Up Light 60°	60 Down Light 60°		-B Black powder coat finish	
						-W White powder coat finish	
	-C80 40 watts: 3160 lumens x 2 (up light & downlight)	-3 3000K CCT	-08 Up Light 8°	08 Down Light 8°	-80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%
		-4 4000K CCT	-18 Up Light 18°	18 Down Light 18°		-W White powder coat finish	
		-5 5000K CCT	-36 Up Light 36°	36 Down Light 36°		-S Silver powder coat finish (RAL9006)	
			-62 Up Light 62°	62 Down Light 62°		-Z Bronze	



The Thalassa outdoor wall-mounted square LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 75 LPW providing performance as well as elegance in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality.

OPERATIONS & ELECTRICAL

Input Voltage : 100-277 Vac

Dimming : 0-10V external dimming down (DMG option)


Lumens per Watt : 75 LPW at 80 CRI

ORDERING GUIDE

Ordering code example: ET6120-C30-3-15-80-W-DMG

FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	FINISH	CONTROLS
ET6120 ERALUX Thalassa ET6120 outdoor wall mounted square sconce fixture	-C30 30 watts: 2400 lumens	-3 3000K CCT	-15 15° beam angle	-80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%
		-4 4000K CCT	-20 20° beam angle		-W White powder coat finish	
		-5 5000K CCT	-30 30° beam angle		-S Silver (RAL9006) powder coat finish	
			-60 60° beam angle		-G Gray (RAL7012) powder coat finish	
					-Z Mineral bronze powder coat finish	

DIMENSIONS

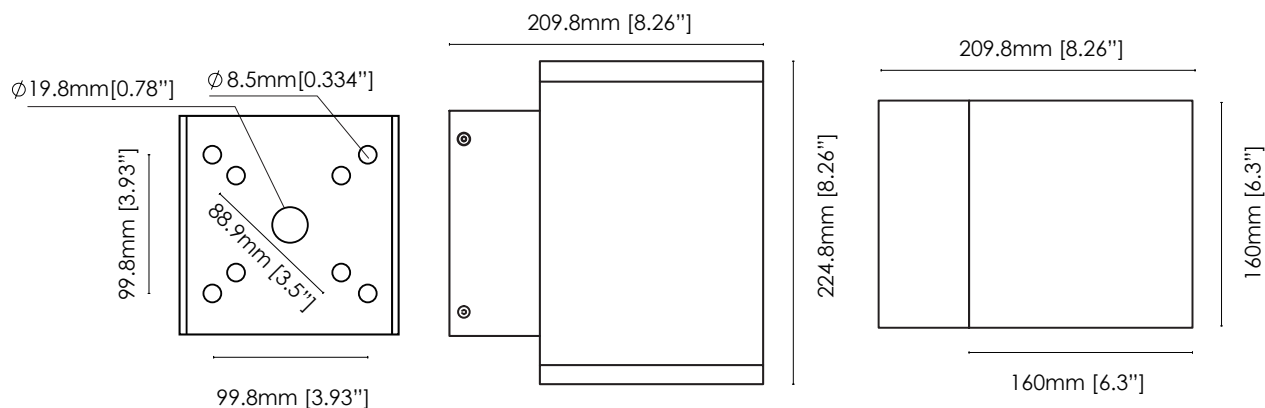



The Thalassa outdoor surface mounted square LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 75 LPW providing performance as well as elegance in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming down to 10% (with SDMG option)


Lumens per Watt : 75 LPW at 80 CRI

ORDERING GUIDE

Ordering code example: ET6123-C30X2-3-15-80-W-SDMG

FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	FINISH	CONTROLS
ET6123 ERALUX Thalassa ET6123 outdoor surface mounted square sconce fixture	-C30X2 2x30 watts: 4800 lumens	-3 3000K CCT	-15 15° beam angle	-80 80 CRI	-B Black powder coat finish	-SDMG Up and down separate 0-10V external dimming down to 10%
			-20 20° beam angle		-W White powder coat finish	
		-4 4000K CCT	-30 30° beam angle		-S Silver (RAL9006) powder coat finish	
			-60 60° beam angle		-G Gray (RAL7012) powder coat finish	
			-5 5000K CCT		-Z Mineral bronze powder coat finish	
			-1560 Up: 15° beam angle Down: 60° beam angle			

DIMENSIONS

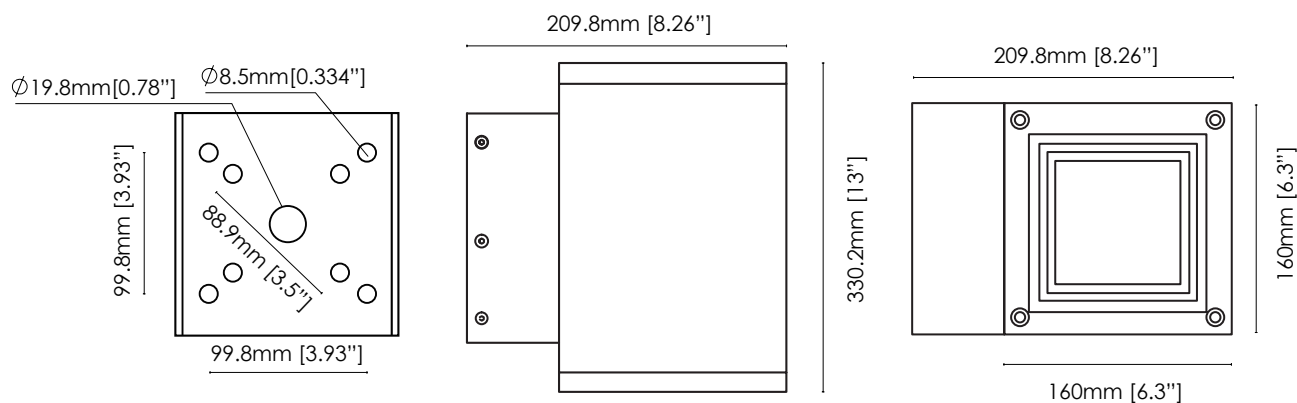



The Thalassa outdoor surface mounted square LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 95 LPW providing performance as well as elegance in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming down to 10%


Lumens per Watt : 95 LPW at 80 CRI

ORDERING GUIDE

Ordering code example: ET6150-C40-3-8-80-W-DMG

FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	FINISH	CONTROLS
ET6150 ERALUX Thalassa ET6150 outdoor wall mounted square sconce fixture	-C40 40 watts: 3700 lumens	-3 3000K CCT	-8 8° beam angle	-80 80 CRI	-B Black powdercoat finish	-DMG 0-10V external dimming down to 10%
		-4 4000K CCT	-18 18° beam angle		-W White powder coat finish	
		-5 5000K CCT	-36 36° beam angle		-S Silver (RAL9006) powder coat finish	
		-62 62° beam angle			-G Gray (RAL7012) powder coat finish	
					-Z Mineral bronze powder coat finish	

DIMENSIONS

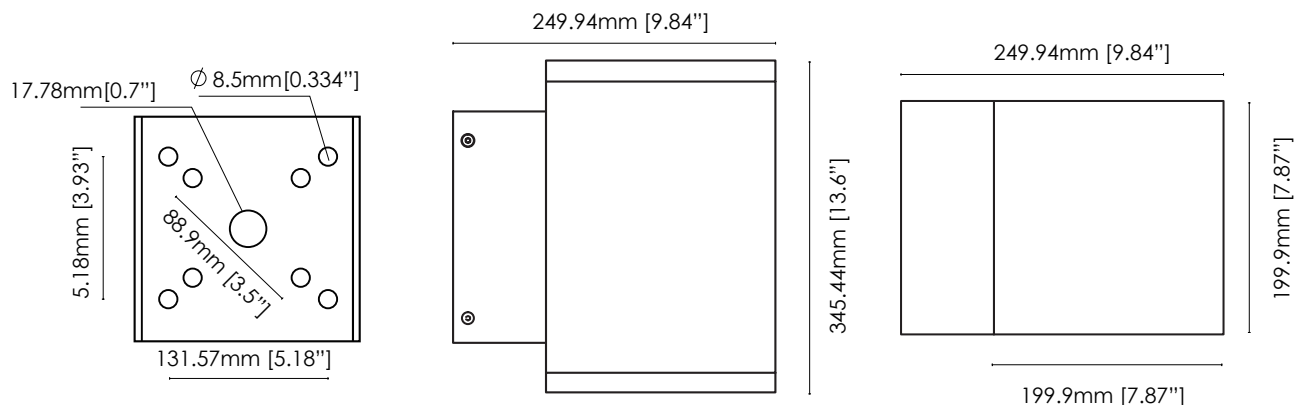



The Thalassa outdoor surface-mounted square LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 95 LPW providing performance as well as elegance in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V external dimming down to 10% (with DMG option)


Lumens per Watt : 95 LPW at 80 CRI

ORDERING GUIDE

Ordering code example: ET6161-C80-3-8-80-W-DMG

FIXTURE FAMILY	POWER	CCT	BEAM ANGLE	CRI	FINISH	CONTROLS	
ET6161 ERALUX Thalassa ET6161 outdoor wall mounted square sconce fixture	-C80 80 watts: 7400 lumens	-3 3000K CCT	-8 8° beam angle	-80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%	
		-4 4000K CCT	-18 18° beam angle		-W White powder coat finish		
		-5 5000K CCT	-36 36° beam angle		-S Silver (RAL9006) powder coat finish		
			-62 62° beam angle		-G Gray (RAL7012) powder coat finish		
					-Z Mineral bronze powder coat finish		

DIMENSIONS

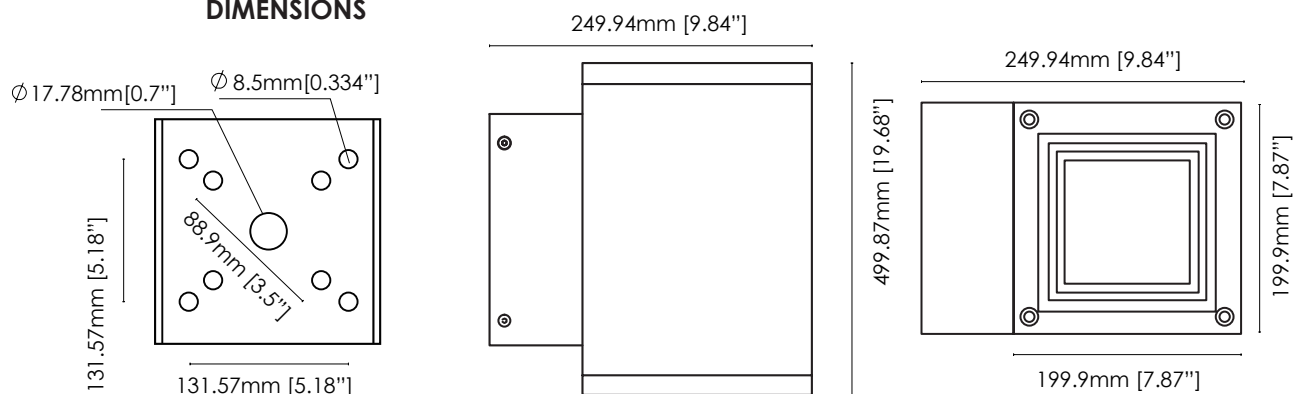



ATHENA is a super modular outdoor stadium sports light available from 200W to 1200W, with 2 CCT options and 5 beam angle options could fulfill any of your project needs. The compact modular design allows quick and flexible assembly and installation. You can easily adjust the light angle to create diversity of lighting environment. Athena is ERALUX's latest high-power outdoor lighting which can be applied to the sports field, stadium venue, plazas, docking space, etc.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac, 277-480 Vac

Dimming : 0-10V dimming

Lumens per Watt : 140 LPW for 30°, 45°, 60° at 70 CRI


125 LPW for 10°, 15° at 70 CRI

ORDERING GUIDE

Ordering code example: AE-SP-AH-200-30-740-010-SV

FIXTURE FAMILY	POWER	CONTROLS	CCT	INPUT VOLTAGE	CONTROL	FINISH
AE-SP-AH- ERALUX Athena Stadium Sports Light	200- 200 watts; 25,000 / 28,000 lumens	10 10° beam angle; 125 LPW	-740 70 CRI 4000K CCT	[BLANK] 100-277 Vac 50 / 60 Hz	-010 0-10V dimming	-SV Silver finish
	400- 400 watts; 50,000 / 56,000 lumens	15 15° beam angle; 125 LPW				
	600- 600 watts; 75,000 / 84,000 lumens	30 30° beam angle; 140 LPW				
	800- 800 watts; 100,000 / 112,000 lumens	45 45° beam angle; 140 LPW				
	1200- 1200 watts; 150,000 / 168,000 lumens	60 60° beam angle; 140 LPW				
			-750 70 CRI 5000K CCT	-HV 277-480V 50 / 60 Hz		

DIMENSIONS

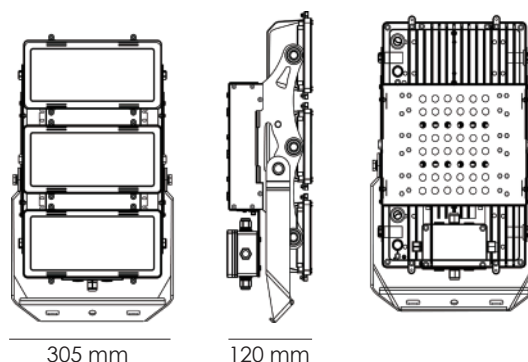



The Zeus LED luminaire is designed to show off your stadium and athletic field lighting needs. It offers a superior efficacy of up to 130 LPW with multiple CCT and beam angle variations at both 120-277V and 277-480V. Its bracket mount, optional visor, and laser positioning tool will allow you to be able to focus the light to maximize your space.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac, 277-480 Vac

Dimming : 1-10V dimming

Lumens per Watt :

130 LPW at 12°


160 LPW at 30°, 55°

ORDERING GUIDE

Ordering code example: AE-SP-ZS320W-010UV-4000K30

FIXTURE FAMILY	POWER	CONTROLS	INPUT VOLTAGE	CCT	BEAM ANGLE
AE-SP-ZS ERALUX ZEUS Series LED stadium light fixture	480W	-010 1-10V Dimming	UV 120-277V input voltage range	-4000K 4000K CCT	12 12° beam angle
	62,000 lumens				
	62,400 Lms				
	at 12° beam angle				
	76,800 Lms at				
	30°, 55° beam angle				
	600W				
	600 watts				
	78,000 Lms				
	at 12° beam angle				
	96,000 Lms at	HV 277-480V input voltage range	-5000K 5000K CCT		30 30° beam angle
	30°, 55° beam angle				
					55 55° beam angle

DIMENSIONS

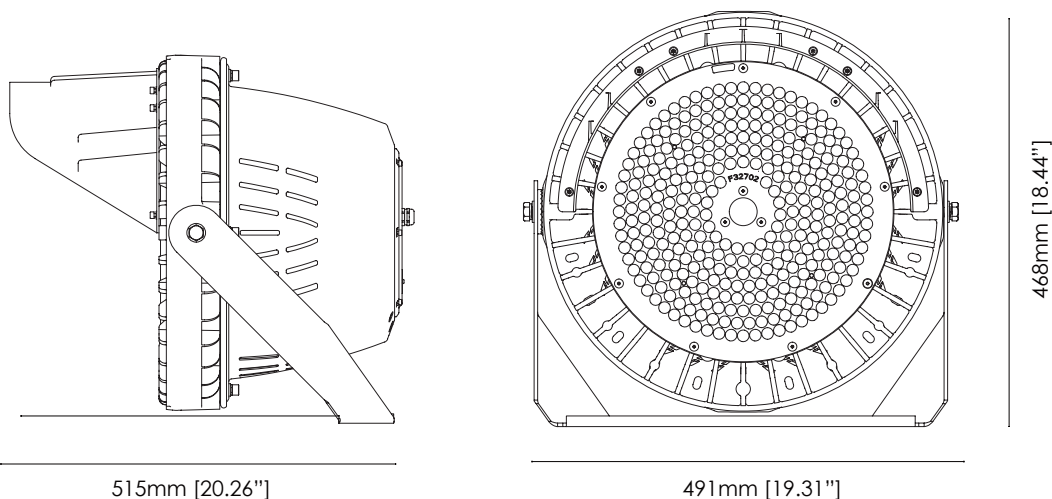

ZEUS



The Fuji is an elegant approach for a wall pack fixture. With a die-cast aluminum housing, its cooling design improves heat dissipation and enables a long-lasting system. The fuji also offers excellent optics design which greatly improves light utilization and uniformity. This fixture is the perfect solution for residential and multi-housing projects. Fuji is extremely easy for installation with surface mounted kit.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : 0-10V dimming

Lumens per Watt : 125 LPW at 80 CRI

Beam angle: 90°x140°

ORDERING GUIDE

Ordering code example: AE-WP-FJ-25W-H-TCP-BZ

FIXTURE FAMILY	POWER	PERFORMANCE	CCT	FINISH
----------------	-------	-------------	-----	--------

FUJI

AE-WP-FJ-
FUJI Series
outdoor wall
pack light
fixture

25W-
Power Selectable
25/20/15 Watts:
3,125/2,500/1,875 lumens


H-
Premium light
diffusion

TCP
Power and CCT
Adjustable
3000/4000/5000K

-BK
Black finish

-BZ
Bronze finish

DIMENSIONS

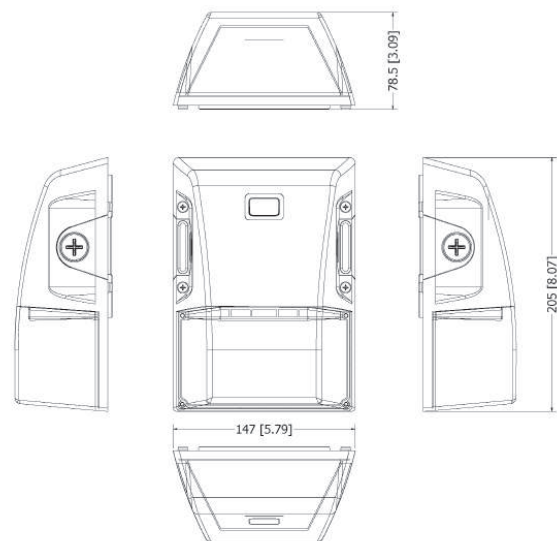



The ETNA is the traditional wall pack enhanced with progressive led technologies, photo-cell, among others. The wall pack delivers up to 120 LPW in a variety of power and CCT options. The ETNA comes with a CCT/Power switchable capability. It is heavy-duty aluminum die cast housing, is fully sealed to be dirt proof and proven to withstand the outdoor elements. The ETNA is the living proof where performance can be found in long standing traditional products.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347Vac

Dimming : 0-10V external dimming down to 10%

Lumens per Watt : 120 LPW at 80 CRI

Beam angle: 70° x 110°

ORDERING GUIDE


Ordering code example: AE-WP-ET-60W-CA-TCP-D-BK

FIXTURE FAMILY	POWER	INPUT VOLTAGE	CCT	CONTROLS	FINISH
----------------	-------	---------------	-----	----------	--------

ETNA

AE-WP-ET- ERALUX ETNA Series outdoor wall pack light fixture	60W Power Switchable 60/50/40W	-CA 120-347V	-TCP 30/40/50K CCT Switchable	-D 0-10V external dimming down to 10% -P Photocell	-BK Black finish -BZ Bronze finish
	120W Power Switchable 120/100/80W				

DIMENSIONS

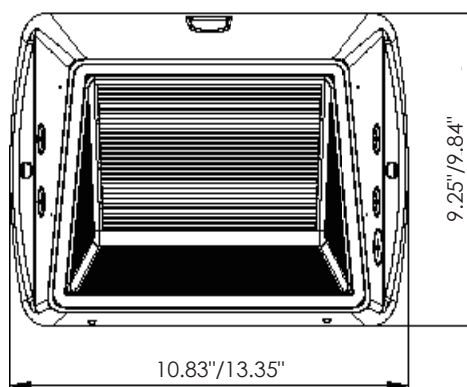



Mauna Series is a high quality, durable, and elegant wall pack LED fixture. Its robust structure allows it to be rated for both wet and dusty locations and is fully functional in a large temperature range. Mauna is Power/CCT Switchable and has 130 L/W.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347 Vac

Dimming : 0-10V dimming

Lumens per Watt : 130 LPW at 80 CRI


Beam angle: 90°x110°

ORDERING GUIDE

Ordering code example: AE-WP-MN-70W-TCP-CA-D-BZ

FIXTURE FAMILY	POWER	CCT	INPUT VOLTAGE	CONTROLS	FINISH
AE-WP-MN MAUNA Series outdoor wall pack light fixture	-40W Power switchable 20/30/40W Lumen switchable 2,600/3,900/5,200 lms	-TCP CCT Adjustable 3000/4000 /5000K CCT range	-CA 120-347Vac input voltage range	-D 0-10V Dimming	-BZ Bronze powder coat finish
	-70W Power switchable 45/60/70W Lumen switchable 5,850/7,800/9,450 lms			-P Photocell	-BK Black powder coat finish
				-EM Emergency Battery Back up	-WH White powder coat finish

DIMENSIONS

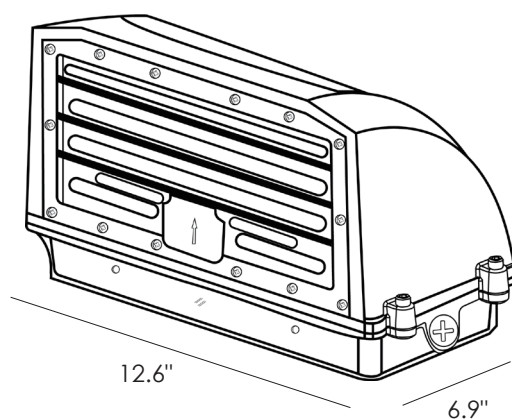



The Fogo adjustable wall packs are high-efficacy luminaires with a machined finished die-cast aluminum shell. It features an adjustable head, so the beam can be aimed in various positions. It is POWER/ CCT switchable with input voltage ranges between 120 and 347V which makes it suitable in different projects and scenarios.

OPERATIONS & ELECTRICAL

Input Voltage : 120-347Vac

Dimming : 0-10V

Lumens per Watt : 120 LPW at 80 CRI

Beam angle: 65° X 95°

ORDERING GUIDE


Ordering code example: AE-WP-FG-25W-TCP-CA-D-BK

FIXTURE FAMILY	POWER	CCT	INPUT VOLTAGE	CONTROLS	FINISH
----------------	-------	-----	---------------	----------	--------

FOGO

AE-WP-FG- ERALUX FOGO outdoor wall pack light fixture	25W Watt adjustable: 25W/20W/15W	-TCP CCT Adjustable 3000/4000 /5000K CCT	-CA 120-347Vac input voltage	-D 0-10V Dimming -P Photocell	[BLANK] Bronze powder coat finish
	75W Watt adjustable: 75W/60W/45W				-BK Black powder coat finish

DIMENSIONS

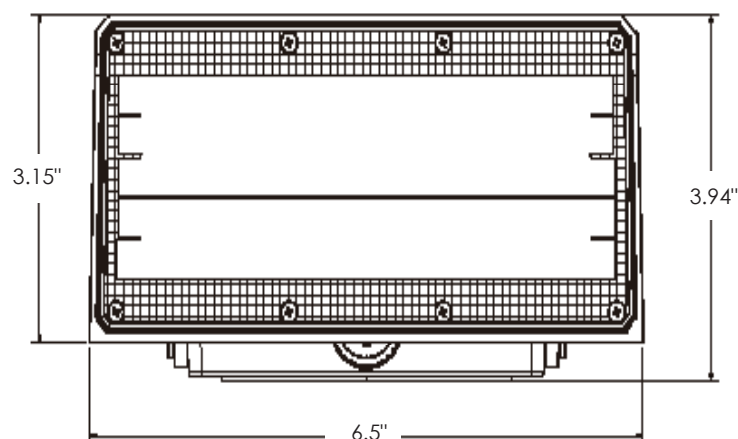



TZ differentiates itself from other wallpacks for its slim “dark sky friendly” look to save space, and the installation angle can be adjusted. With Type 3 optical lenses and IP wet location rated, its compact structure will provide a defining look to brighten up pathways and entrances in residential areas, as well as building facades.

OPERATIONS & ELECTRICAL


Input Voltage : 120-277 Vac
Dimming : No dimming
Lumens per Watt : ~140 LPW at 70CRI and 5000K
Distribution: Type 3

ORDERING GUIDE

Ordering code example: AE-WP-TZ-40-70SC1-UV-BZ-B

FIXTURE FAMILY	POWER	CRI	CCT	INPUT VOLTAGE	FINISH	CONTROLS
TZ	-30					
	10/15/22.5/30 watts;					
	Up to 3,900 lms					
	AE-WP-TZ					
	ERALUX TZ					
	series outdoor					
	wedge wall					
	pack					
	-40	-70	SC1	-UV	BZ	-B
	12/20/30/40 watts;	70	3000K	120-277Vac	Bronze finish	No control
	Up to 5,600 lms	CRI			-BK	-P
					Black finish	Photocell
	-70					
	21/35/53/70 watts;					
	Up to 9,800 lms					

DIMENSIONS

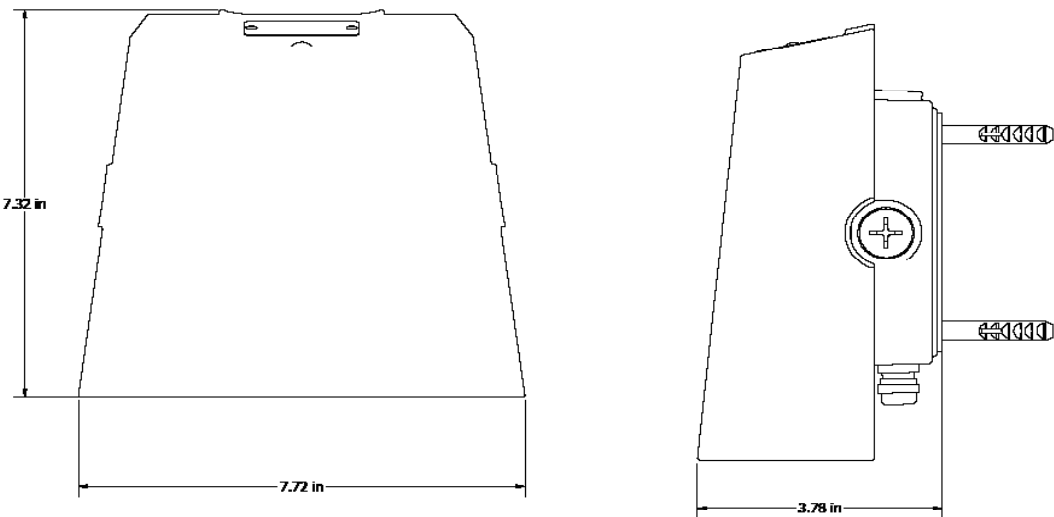



MODERN DESIGNS AND TECHNOLOGY

Available in a variety of shapes and sizes, track lights are a perfect way to distinguish any architectural elements or even bring light to a darker segment of the room.

Track lights are designed to offer flexibility in selecting key features and are made to create focal points with a retail shelf or an art piece. A perfect combination with current track systems, the track heads can be repositioned and relocated throughout the entire track. Using modern LED technology, with so many variations offered, track lights have the potential to fill whatever lighting needs you require. Available in a variety of shapes and sizes and are a perfect way to distinguish any architectural elements or even bring light to a darker segment of the room.





“Simplicity, carried to an extreme, becomes elegance.”
- John Franklin



PIVOT is a track fixture from ERALUX designed with a mission for cost-effectiveness. Beautifully designed in aluminum die-cast and plastic housing, PIVOT redefines elegance and performance at an affordable budget. This product enhances your space and is compatible with all major track systems.

OPERATIONS & ELECTRICAL

Input Voltage : 120 Vac

Dimming : N/A


Lumens per Watt : 70-77 LPW at 90 CRI

ORDERING GUIDE

Ordering code example: AE-TL-PV1112FLP30J1BK

FIXTURE FAMILY	LUMEN	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-PV ERALUX Pivot Series track light=	11	12 11 watts: 120V Up to 850 lumens	FL Flood light 20° 11 watts: 850 lumens at 90CRI 3000K CBCP: 3670 @ 90 CRI	P Premium 90 CRI	30 3000K CCT	J1 Juno mounting system	BK Black powder coat finish
			WF Wide Flood light 36° 11 watts: 850 lumens at 90CRI 3000K CBCP: 1650 @ 90 CRI		35 3500K CCT	G1 Global mounting system	
					40 4000K CCT	H1 Halo mounting system	
						L1 Lightolier mounting system	
						SV Silver powder coat finish	
						WH White powder coat finish	

DIMENSIONS

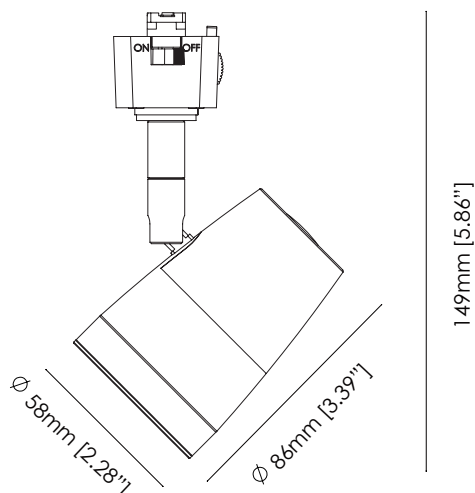



The KEPLER fixture series was explicitly designed as a sleek alternative to the traditional track light. It distinguishes itself with its slim and compact look, variety of optical options, and a series of accessories to adapt to every possible scenario. This product comes standard at 90 CRI. The Kepler is an easy addition to your next project, available in black, white and silver finishes.

OPERATIONS & ELECTRICAL

Input Voltage : 120 Vac

Dimming : Triac dimming

Lumens per Watt : 69-80 LPW at 90 CRI (Kepler) & 78-83 LPW at 90 CRI (Kepler Plus)

ORDERING GUIDE


Ordering code example: AE-TL-KP-12FLP30J1BK

KEPLER

KEPLER PLUS

FIXTURE FAMILY	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-KP-12 ERALUX KEPLER track light 120V	FL Flood light 25° 10 watts: 750 lumens at 90CRI 3000K CBCP: 2780 @ 90 CRI	P Premium 90 CRI	30 3000K CCT	J1 Juno mounting system	BK Black powder coat finish
	WF Wide Flood light 35° 10 watts: 750 lumens at 90CRI 3000K CBCP: 1590 @ 90 CRI				
	VF Very Wide Flood light 55° 10 watts: 750 lumens at 90CRI 3000K CBCP: 840 @ 90 CRI				
AE-TL-KPP-12 ERALUX KEPLER PLUS track light 120V	NF Narrow Flood light 25° 13.5 watts: 1,053 lumens at 90CRI 3000K CBC: 5080 @ 90 CRI	40 4000K CCT	L1 Lightolier mounting system	WH White powder coat finish	SV Silver powder coat finish
	FL Flood light 35° 13.5 watts: 1,053 lumens at 90CRI 3000K CBCP: 2620 @ 90 CRI				
	WF Wide Flood light 55° 13.5 watts: 1,053 lumens at 90CRI 3000K CBCP: 1350 @ 90 CRI				
				G1 Global mounting system	

DIMENSIONS

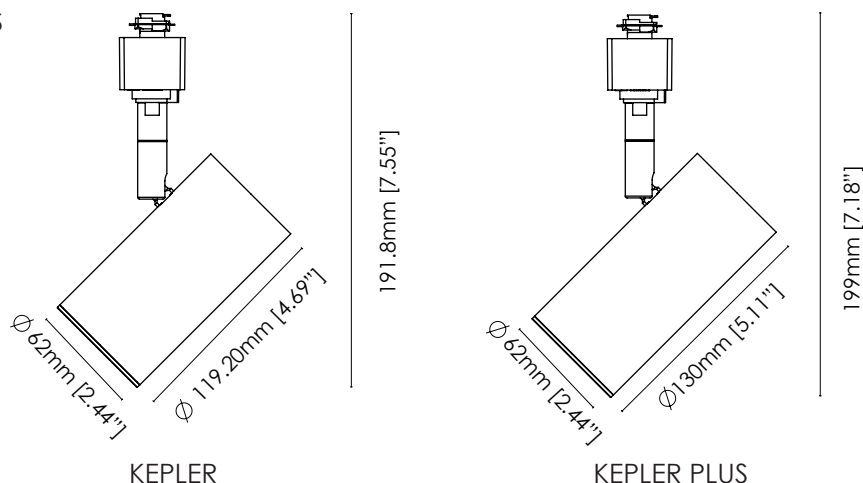

KEPLER

KEPLER PLUS



The Maven track light is designed for versatility in any environment while appearing simplistic and timeless. Available in various CCTs, and adapter options; MAVEN can mount to pre-existing tracks or be paired with other ERALUX accessories to build a new track system. MAVEN also provides an even distribution at various beam angles. The LED head is 210° adjustable for a 355° rotation and can bend up to 90° for a wide range of motion. The Maven CANOPY was made for quick and easy installation without a pre-existing track system. MAVEN CANOPY attaches seamlessly to the surface of your choice.

OPERATIONS & ELECTRICAL

MAVEN

Input Voltage : 120 Vac

Dimming : N/A

Lumens per Watt : 67-78 LPW at 90 CRI

Distribution: Narrow Flood, Flood, Wide Flood

MAVEN CANOPY

Input Voltage : 120 Vac

Lumens per Watt : 73-78 LPW at 90 CRI

Distribution: Narrow Flood, Flood, Wide Flood


ORDERING GUIDE

Ordering code example: AE-TL-MV-12-FLP30J1BK


FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-MV ERALUX MAVEN Series track light	12 120V	-NF Narrow Flood 25° 10.5 watts: 767 lumens at 90CRI 3000K CBCP: 2750 @ 90 CRI	P Premium 90 CRI	30 3000K CCT	J1 Juno mounting system	BK Black powder coat finish
		-FL Flood light 40° 10.5 watts: 767 lumens at 90CRI 3000K CBCP: 1700 @ 90 CRI			G1 Global mounting system	
		-WF Wide Flood light 65° 10.5 watts: 767 lumens at 90CRI 3000K CBCP: 620 @ 90 CRI			H1 Halo mounting system	
AE-TL-MVC ERALUX Maven Surface mount canopy light				40 4000K CCT	L1 Lightolier mounting system	SV Silver powder coat finish
						WH White powder coat finish

DIMENSIONS

*Canopy does not have an ADAPTER

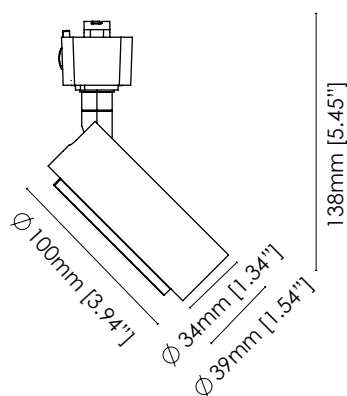

MAVEN

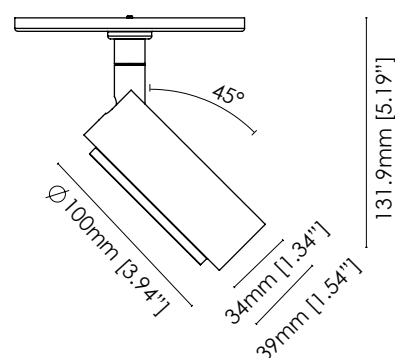

MAVEN CANOPY



The Maven Elite is the most advanced among the series, with the driver separated from the luminaire. Maven Elite is a powerful choice and a perfect combination with the other Maven series' tracklights. Available in various CCT, and adapter options, Maven Elite can mount to pre-existing tracks or be paired with other ERALUX accessories to build a new track system. MAVEN provides an even distribution at various beam angles. The LED head rotates for a flexible look wherever the beam is required.

OPERATIONS & ELECTRICAL

Input Voltage : 120 Vac

Dimming : Triac Dimming

Lumens per Watt : 92 at 3000K & 99 at 3500K & 4000K


ORDERING GUIDE

Ordering code example: AE-TL-MVE-12SPP30J1BK

MAVEN ELITE

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-MVE ERALUX MAVEN ELITE track light	12 120 V	-SP Spotlight 10° CBCP: 15000 @ 90 CRI	P Premium 90 CRI	30 3000K CCT 14 watts: 1,288 lumens	J1 Juno mounting system	BK Black powder coat finish
		-NF Narrow flood light 20° CBCP: 7650 @ 90 CRI			G1 Global mounting system	
		-FL Flood light 35° CBCP: 3420 @ 90 CRI		40 4000K CCT 14 watts: 1,386 lumens	H1 Halo mounting system	WH White powder coat finish
		-VF Wide flood light 60° CBCP: 1290 @ 90 CRI			L1 Lightolier mounting system	SV Silver powder coat finish

DIMENSIONS

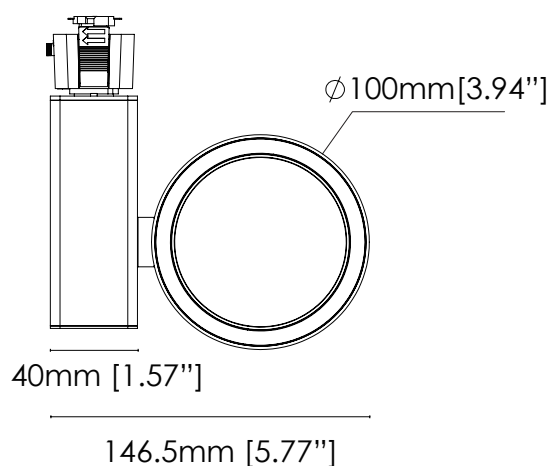



The ARTEMIS series comes with a horizontal driver enclosure and a unique track head enhanced with the ability to adjust the focus of the optics based on your requirement. It is available in black, white and silver finishes or a combination of any two finishes to provide a unique customized product for your environment. This product comes at a standard 90 CRI but also caters to lighting experts with a high-GAI (Gamut Area Index) option for an enhanced visual effect on products.

OPERATIONS & ELECTRICAL

Input Voltage : 120 Vac

Dimming : Triac dimming

Lumens per Watt : 65-69 LPW at 90 CRI

Distribution : Variable beam angle from 20° to 50°


ORDERING GUIDE

Ordering code example: AE-TL-AT12VAP30J1BK

ARTEMIS

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-AT ERALUX Artemis Series track light	12 120V	VA Variable dis- tribution from 20° to 50° Up to 1,035 lumens 20: CBCP 4200 @ 90 CRI 50: CBCP 1450 @ 90 CRI	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
				30 3000K CCT		
				35 3500K CCT		
				40 4000K CCT		
					L1 Lightolier mounting system	
			S Superior HIGH-GAI (available only at 3000K & 3500K)		G1 Global mounting system	WH White powder coat finish
					H1 Halo mounting system	
						SV Silver powder coat finish

DIMENSIONS

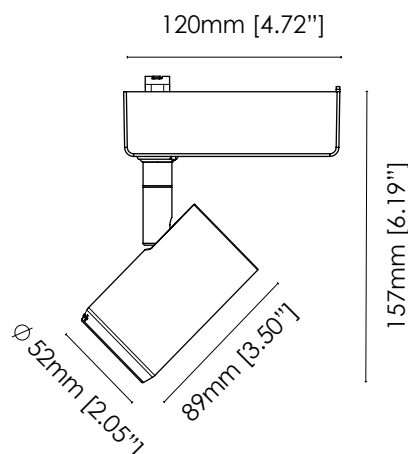



The HUBBLE series feature the adjustable beam angle capability enabling field adjustment of the beam angle without any tools. The beam angle can be made to vary between a narrow flood, flood and a wide flood distribution. This product comes at a standard at 90 CRI, but also caters to lighting experts with a high-GAI (Gamut Area Index) option for an enhanced visual effect on products.

OPERATIONS & ELECTRICAL

Input Voltage: 120 Vac

Dimming: Triac dimming

Lumens per Watt: 85-91 LPW at 90 CRI


Distribution: Variable from 20° to 55°

ORDERING GUIDE

Ordering code example: AE-TL-HB12VAP30J1BK

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-HB ERALUX Hubble Series track light with up to 2,730 lumens	12 120V	VA Variable distribution from 20° to 55° AT 20°: CBCP: 10788 @ 90 CRI AT 55°: CBCP: 2723 @ 90 CRI	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
				30 3000K CCT	G1 Global mounting system	WH White powder coat finish
				35 3500K CCT	H1 Halo mounting system	SV Silver powder coat finish
				40 4000K CCT	L1 Lightolier mounting system	

DIMENSIONS

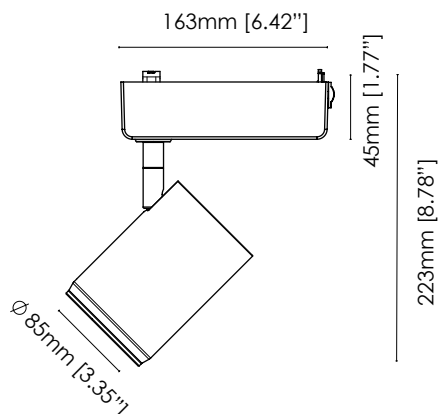



The EUCLID series features a vertical driver enclosure with a semi-exposed heatsink to provide a unique look to your environment. It is available in black, white and silver finish or a combination of two finishes to provide a distinctive look for your store. This product comes at a standard 90 CRI but also caters to lighting experts with a high-GAI (Gamut Area Index) option for an enhanced visual effect on products.

OPERATIONS & ELECTRICAL

Input Voltage: 120 Vac

Dimming: Triac dimming

Lumens per Watt: 81-94 LPW at 90 CRI

Distribution: Flood, Wide Flood, Very Wide Flood

ORDERING GUIDE


Ordering code example: AE-TL-EL1412NFP30J1BK

FIXTURE FAMILY	LUMEN	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-EL ERALUX Euclid Series track light	14 14 watts: 1220 lumens at 90CRI 3000K	12 120V	FL Flood light 13° CBCP: 17521 @ 90 CRI WF Wide Flood light 25° CBCP: 9347 @ 90 CRI VF Very Wide Flood light 34° CBCP: 5987 @ 90 CRI	P Premium 90 CRI S** Superior HIGH GAI	27 2700K CCT 30 3000K CCT 35 3500K CCT 40 4000K CCT	J1 Juno mounting system G1 Global mounting system H1 Halo mounting system L1 Lightolier mounting system	BK Black powder coat finish WH White powder coat finish SV Silver powder coat finish
	17 19 watts: 1680 lumens at 90CRI 3000K						
	25 27 watts: 2210 lumens at 90CRI 3000K						
	45* 51 watts: 4320 lumens at 90CRI 3000K						

*AE-TL-EL45 not available in High GAI

** Available only at 3000K & 3500K

DIMENSIONS

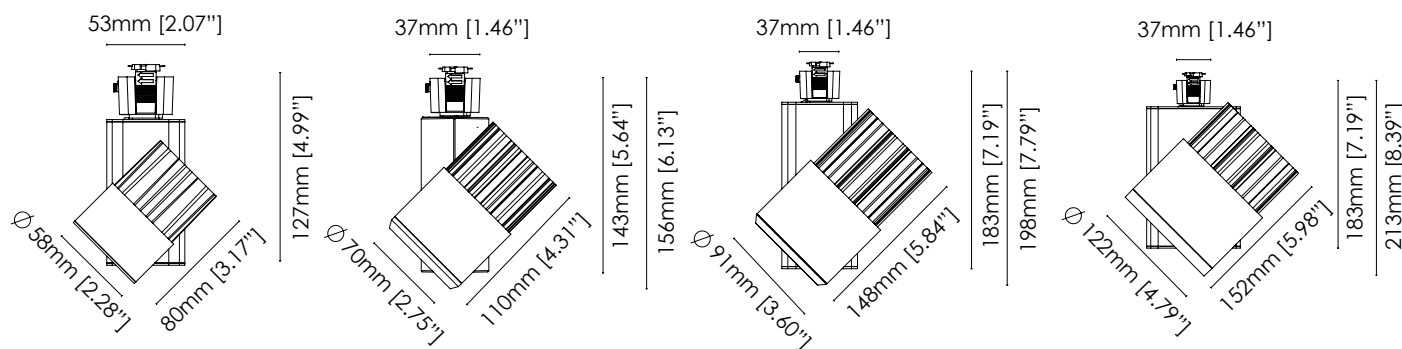



The IRIS series has a distinctive look with a semi-exposed heatsink. This product features four possible beam distributions ranging from narrow flood, flood, wide flood and very wide flood. This product also comes standard at 90 CRI but also caters to lighting experts with a high-GAI (Gamut Area Index) option for an enhanced visual effect on products.

OPERATIONS & ELECTRICAL

Input Voltage: 120 Vac

Dimming: Triac dimming

Lumens per Watt: 81-93 LPW at 90 CRI

Distribution: Narrow flood, Flood, Wide Flood, Very Wide Flood


ORDERING GUIDE

Ordering code example: AE-TL-IR12PF14N30J1BK

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-IR ERALUX Iris Series track light with up to 1,302 lumens	12 120V	NF Narrow Flood light 18° CBCP: 7494 @90 CRI			J1 Juno mounting system	
		FL Flood light 21° CBCP: 5908 @ 90 CRI	P Premium 90 CRI	27 2700K CCT	G1 Global mounting system	BK Black powder coat finish
		WF Wide Flood light 36° CBCP: 2721 @ 90 CRI	S* Superior HIGH GAI	30 3000K CCT		WH White powder
		VF Very Wide flood 59° CBCP: 1233 @ 90 CRI		35 3500K CCT	H1 Halo mounting system	SV Silver powder coat finish
				40 4000K CCT	L1 Lightolier mounting system	

*Available only at 3000k & 3500k

DIMENSIONS

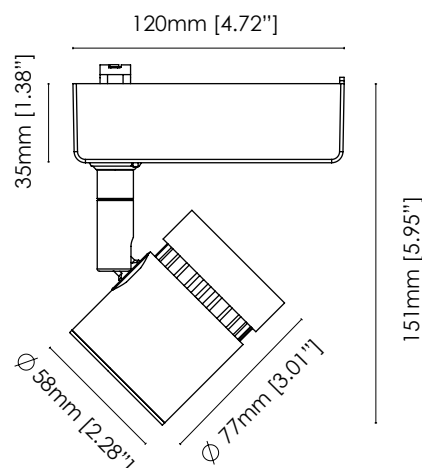



The OSIRIS series features a distinctive look with a smooth heatsink and a vertical driver enclosure. There are three possible lumens packages and three possible beam distributions: narrow flood, flood and wide flood. This product also comes standard at 90 CRI.

OPERATIONS & ELECTRICAL

Input Voltage: 120 Vac

Dimming: Triac dimming

Lumens per Watt: 74-92 LPW at 90 CRI

Distribution: Narrow flood, Flood, Wide Flood


ORDERING GUIDE

Ordering code example: AE-TL-OS1312FL30J1BK

FIXTURE FAMILY	LUMEN	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-OS ERALUX Osiris Series track light	13 20 watts: 1590 lumens	12 120V	NF Narrow flood light 20°	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
	29 27 watts: 2100 lumens		FL Flood light 40°		30 3000K CCT		
	43 51 watts: 4430 lumens		WF Wide flood light 59°		35 3500K CCT		
					40 4000K CCT		
						H1 Halo mounting system	WH White powder coat finish
						L1 Lightolier mounting system	SV Silver powder

*Available only at 3000k & 3500k

DIMENSIONS

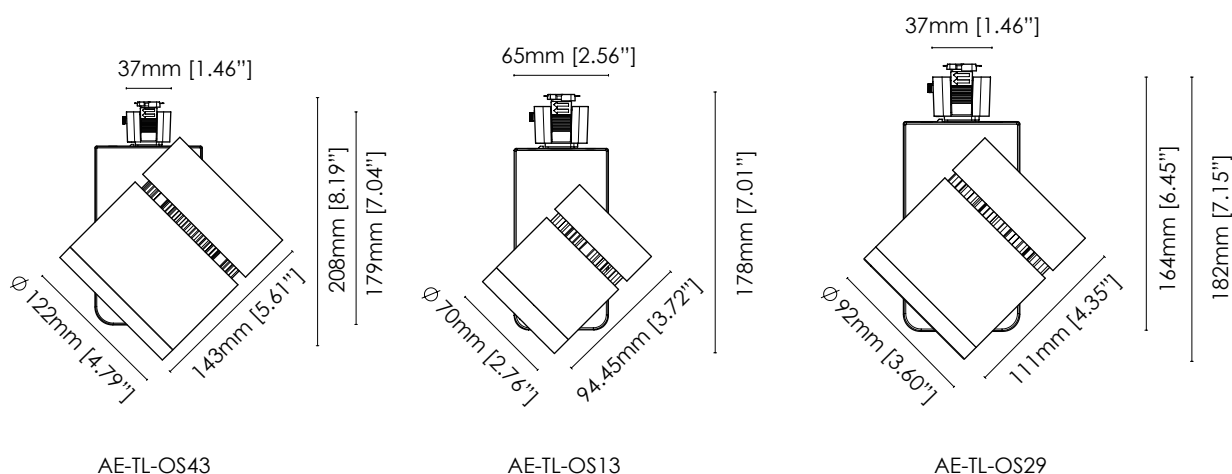



The CHANDRA series track lighting fixture is specifically designed for the retail environment. It distinguishes itself with its sleek look, variety of optical options, and a series of accessories to adapt to every possible scenario. The installation of accessories on this product is simply a breeze. This enables fast deployment of fixtures around stores for reconfigurations of products. This product comes at standard 90 CRI, but also caters for lighting experts with a high-GAI (Gamut Area Index) option for an enhanced visual effect on products.

OPERATIONS & ELECTRICAL

Input Voltage : 120 Vac

Dimming : Triac dimming (Chandra) & N/A (Chandra Basic)

Lumens per Watt : 86 LPW at 90 CRI (Chandra) & 100 LPW at 80 CRI (Chandra Basic)


ORDERING GUIDE

ORDER CODE EXAMPLE: AE-TL-CD12FLN30J1BK

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-CD ERALUX CHANDRA Series track light	12 120V	NF Narrow Flood 13° 20 watts: 1,720 lumens at 90CRI 3000K CBCP: 15783 @ 90 CRI	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
		FL Flood 25° 20 watts: 1,720 lumens at 90CRI 3000K CBCP: 7333 @ 90 CRI	S* Superior HIGH GAI	30 3000K CCT	G1 Global mounting system	WH White powder coat finish
		WF Wide Flood 35° 20 watts: 1,720 lumens at 90CRI 3000K		35 3500K CCT	H1 Halo mounting system	SV Silver powder coat
				40 4000K CCT		
AE-TL-CD12 ERALUX CHANDRA BASIC track light		FL Flood 25° 20 watts: 2,000 lumens at 80CRI 3000K	N 80 CRI		L1 Lightolier mount- ing system	BK Black powder coat finish
		WF Wide Flood 35° 20 watts: 2,000 lumens at 80CRI 3000K				WH White powder coat finish

DIMENSIONS

CHANDRA and CHANDRA BASIC

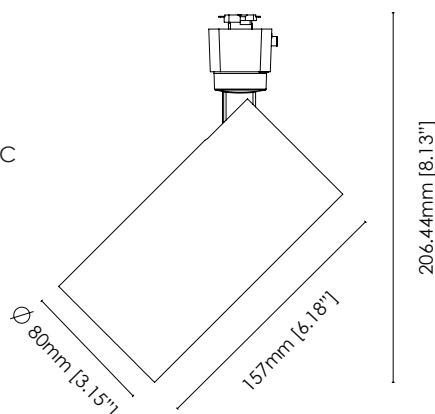

*Available only at 3000k & 3500k

With the CHANDRA Max and CHANDRA Series, you can create a family look in your retail environment with the new CHANDRA Mini series. It comes available in a variety of beam patterns and CCT options. With a 90 CRI for all its CCT, the CHANDRA Mini will enhance your retail environment to another level.

The CHANDRA MAX track lighting fixture distinguishes itself with its sleek look, variety of optical options, and a series of accessories to adapt to every possible scenario. The installation of accessories on this product is simply a breeze. This enables fast deployment of fixtures around stores for reconfigurations of products.

OPERATIONS & ELECTRICAL

Input Voltage : 120 - 277 Vac

Dimming : Triac dimming


Lumens per Watt : 79-91 LPW at 90 CRI (MINI) & 86 LPW at 90 CRI (MAX)

ORDERING GUIDE


ORDER CODE EXAMPLE: AE-TL-CDX-12-XXWNFP30J1BK

FIXTURE FAMILY	WATTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
CHANDRA MINI	AE-TL-CDM-12 ERALUX CHANDRA MINI track light 120V	L 9 watts: 765 lumens at 90CRI 3000K	NF Narrow Flood 25° CBCP: 3300 @ 90 CRI 4800 @ 90 CRI			
		H 13.4 watts: 1,059 lumens at 90CRI 3000K	FL Flood light 30° CBCP: 2200 @ 90 CRI 3160 @ 90 CRI			
			WF Wide Flood light 60° CBCP: 860 @ 90 CRI 1190 @ 90 CRI			
				27 2700K CCT 30 3000K CCT	J1 Juno mounting system G1 Global mounting system	BK Black powder coat finish WH White powder coat finish
CHANDRA MAX	AE-TL-CDX-12 ERALUX CHANDRA MAX track light 120V-277V	-XXW Wattage selectable at 90CRI 3000K: 19 watts: 1,634 lumens 27 watts: 2,322 lumens 41 watts: 3740 lumens	NF 20° Narrow Flood light CBCP: 17000 @90 CRI FL 25° Flood light CBCP: 12850 @90 CRI WF 40° Wide Flood light CBCP: 7700 @90 CRI VF 60° Very Wide Flood light CBCP: 3700 @90 CRI	P Premium 90 CRI 35 3500K CCT 40 4000K CCT	H1 Halo mounting system L1 Lightolier mounting system	SV Silver powder coat finish

DIMENSIONS

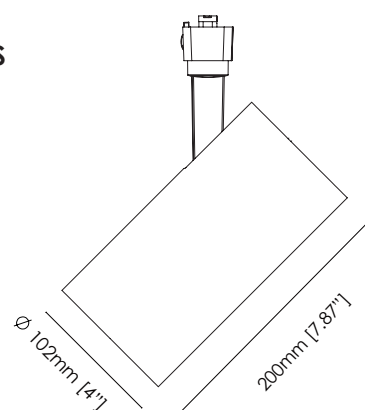

CHANDRA MAX

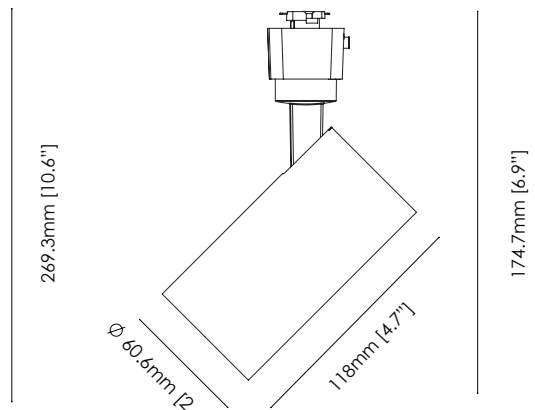

CHANDRA MINI



The DREAM CHASER series differentiates itself with the appearance of its heatsink combined elegantly with the curvy machined die cast housing. This version comes with various beam patterns, track adapters to make it suitable for many applications whether retrofit or new constructions.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : Triac dimming

Lumens per Watt : 76-88 LPW at 90 CRI


Distribution : Spot 13°, Narrow Flood 25°, Flood 34°

ORDERING GUIDE

ORDER CODE EXAMPLE: AE-TL-DCNFP35J1WH

FIXTURE FAMILY	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
DREAM CHASER AE-TL-DC ERALUX Dream Chaser track light	SP Spotlight 13° 2,200 lumens @3000K, 90CRI CBCP: 16294 @ 90 CRI	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
	NF Narrow flood light 25° 2,200 lumens @3000K, 90CRI CBCP: 8696 @ 90 CRI		30 3000K CCT	G1 Global mounting system	WH White powder coat finish
	FL Flood light 34° 2,200 lumens @3000K, 90CRI CBCP: 5561 @ 90 CRI		35 3500K CCT	H1 Halo mounting system	SV Silver powder coat
			40 4000K CCT	L1 Lightolier mounting system	

DIMENSIONS

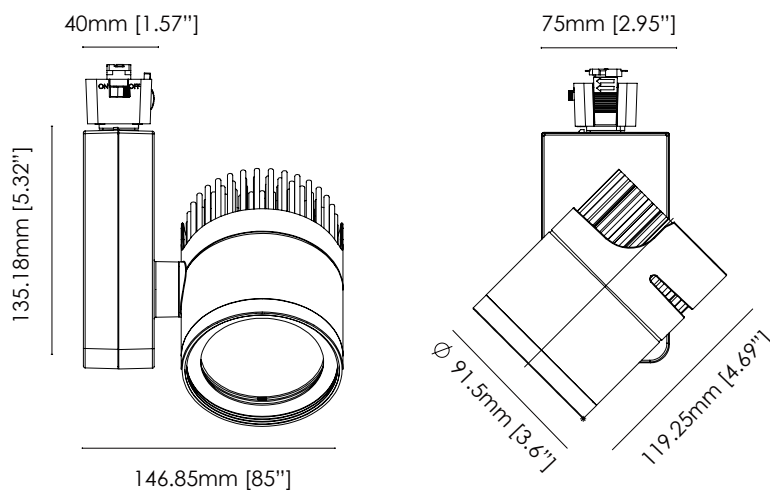



OPERATIONS & ELECTRICAL

Input Voltage : 120 - 277 Vac

Dimming : Triac dimming


Lumens per Watt : 79-92 LPW at 90 CRI (MAX) & 72-84 LPW at 90 CRI (MINI)

ORDERING GUIDE

ORDER CODE EXAMPLE: AE-TL-DCMNP35J1WH

FIXTURE FAMILY	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
DREAM CHASER MINI	AE-TL-DCM ERALUX Dream Chaser MINI track light	SP Spotlight 12° 1,548 lumens @3000K, 90CRI CBCP: 10500 @ 90 CRI			
		NF Narrow flood light 17° 1,548 lumens @3000K, 90CRI CBCP: 7244.7 @ 90 CRI			
		FL Flood light 29° 1,548 lumens @3000K, 90CRI CBCP: 40545 @ 90 CRI			
		WF Wide flood light 33° 1,548 lumens @3000K, 90CRI CBCP: 3581 @ 90 CRI			
DREAM CHASER MAX	AE-TL-DCX ERALUX Dream Chaser MAX track light	NF Narrow flood light 40° 4,275 lumens @3000K, 90CRI CBCP: 7812 @ 90 CRI			
		FL Flood light 59° 4,275 lumens @3000K, 90CRI CBCP: 4919.7 @ 90 CRI			
		SP Spotlight 20° 4,275 lumens @3000K, 90CRI CBCP: 15754 @ 90 CRI			
			P Premium 90 CRI		
			27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
			30 3000K CCT	G1 Global mounting system	WH White powder coat finish
			35 3500K CCT	H1 Halo mounting system	SV Silver powder coat finish
			40 4000K CCT	L1 Lightolier mounting system	

DIMENSIONS

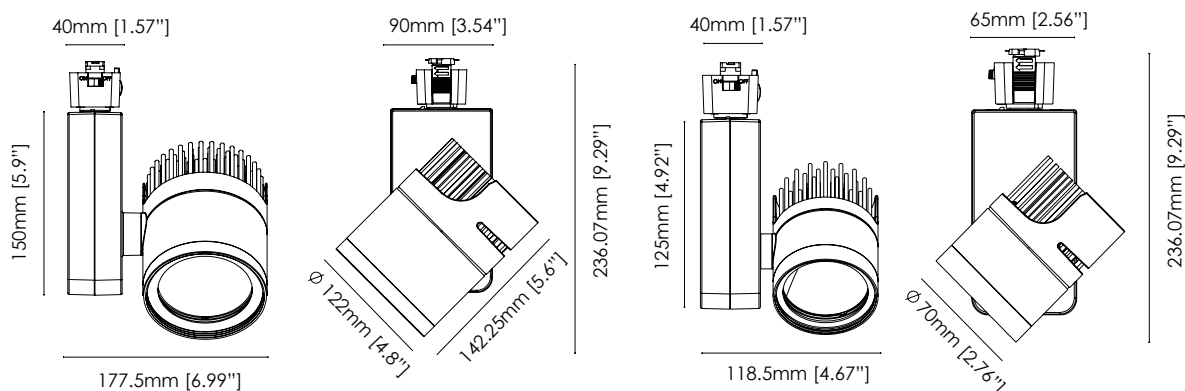



The NuSTAR series features a semi-exposed heatsink to maximize energy savings and an integrated driver enclosure. This track fixture comes in a two-lumen package with its corresponding geometry. It comes standard at 90 CRI but also caters to lighting experts with a HIGH-GAI (Gamut Area Index) option for an enhanced visual effect on products.

OPERATIONS & ELECTRICAL

Input Voltage: 120 Vac

Dimming: Triac dimming

Lumens per Watt: 77-92 LPW at 90 CRI

Distribution: Narrow Flood, Flood, Wide Flood, Very Wide Flood


ORDERING GUIDE

Ordering code example: AE-TL-NS1412NFP30J1BK


FIXTURE FAMILY	LUMEN	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-NS ERALUX NuSTAR Series track light	14 13.5 watts: 1148 lumens at 90CRI 3000K	12 120V	NF Narrow Flood light distribution	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish WH White powder coat finish SV Silver powder coat finish
	31 29 watts: 2407 lumens at 90CRI 3000K		FL Flood light distribution		30 3000K CCT	G1 Global mounting system	
			WF Wide Flood light distribution		35 3500K CCT	H1 Halo mounting system	
					40 4000K CCT	L1 Lightolier mounting system	

*Available only at 3000K & 3500K

DIMENSIONS



AE-TL-NS31



AE-TL-NS14



The APOLLO is an elegant approach for a linear wall wash track fixture and is perfect for your project space whether than be a clothing boutique, walkway, or gallery. Available in 1 or 2 feet lengths, multiple CCTs and finish options, the Apollo stands out against its competitors.

OPERATIONS & ELECTRICAL





Input Voltage : 120 Vac
 Dimming : Triac dimming
 Lumens per Watt : 85-90 LPW at 90 CRI
 Distribution : Linear flood wall wash

ORDERING GUIDE

Ordering code example: AE-TL-AP1FT12FLP30J1BK

FIXTURE FAMILY	LENGTH	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-AP ERALUX Apollo Series linear wall wash track light	1FT 1-foot linear fixture	12 120V	FL Flood light wall wash distribution 30 watts: 2250 lumens at 90CRI 3000K	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish WH White powder coat finish SV Silver powder coat finish
	2FT 2-foot linear fixture		FL Flood light wall wash distribution 60 watts: 5100 lumens at 90CRI 3000K		30 3000K CCT	G1 Global mounting system	
					35 3500K CCT	H1 Halo mounting system	
					40 4000K CCT	L1 Lightolier mounting system	

DIMENSIONS

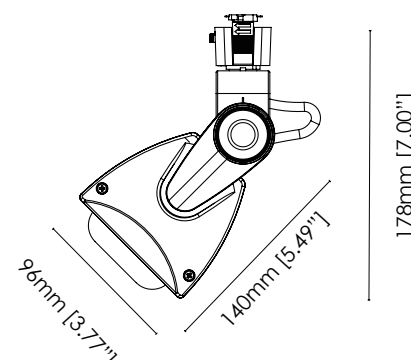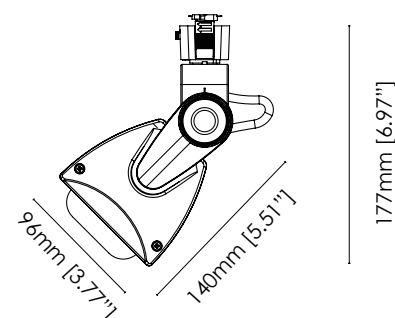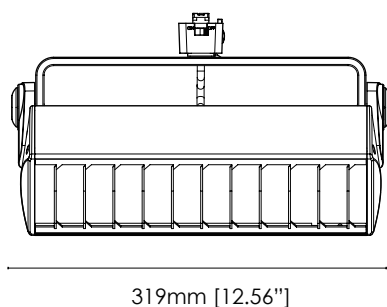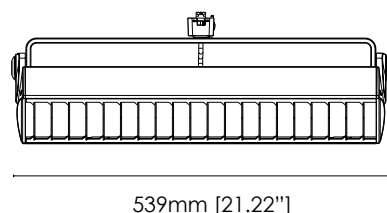

APOLLO



The ODYSSEY series is a wall-wash track fixture designed with a quality die-cast finish, offering unequalled robustness. This product features a unique spring mechanism around its joints to ease the beam angle's aiming. It comes standard at 90 CRI but also caters to lighting experts with a high-GAI (Gamut Area Index) option for an enhanced visual effect on products.

OPERATIONS & ELECTRICAL

Input Voltage: 120 Vac

Dimming : Triac dimming

Lumens per Watt: 86-90-95 LPW at 90 CRI

Distribution: Linear wall wash beam distribution


ORDERING GUIDE

Ordering code example: AE-TLOD12WWP30J1BK

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-OD ERALUX Odyssey Series track light	12 120V	WW Wall Wash light distribution	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
				30 3000K CCT	G1 Global mounting system	
				35 3500K CCT	H1 Halo mounting system	
				40 4000K CCT	SV Silver powder coat finish	
					L1 Lightolier mounting system	
			S* Superior HIGH GAI			WH White powder coat finish

*Available only at 3000K & 3500K

DIMENSIONS

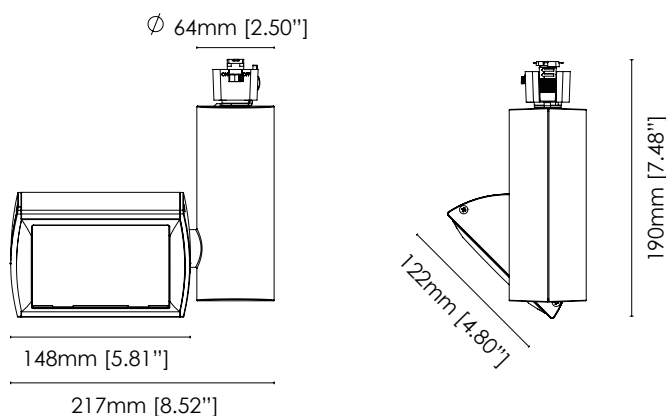



Equipped with a power supply, the TERRA wall wash series is capable of more than other track lights. TERRA has a programmable driver, smart control capabilities, and dimmer compatibility. The TERRA is made for the track system with various adapter options. TERRA can adapt to your pre-existing track system or with new ERALUX accessories. Like the TERRA Canopy, the fixture will offer a double asymmetric beam of light. The LED head can lock into place at various angles.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : Triac dimming

Lumens per Watt : 54-58 LPW at 90 CRI

Distribution : Double Asymmetrical, 25°

ORDERING GUIDE


Ordering code example: AE-TL-TR-UV-DAP30J1BK

TERRA

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-TR ERALUX TERRA Wall wash track light	-UV 120-277V	-DA 30 watts: 1,620 lumens 3000K Double Asymmetrical, 25°	P Premium 90 CRI	27 2700K CCT 30 3000K CCT 35 3500K CCT 40 4000K CCT	J1 Juno mounting system G1 Global mounting system H1 Halo mounting system L1 Lightolier mounting system	BK Black powder coat finish WH White powder coat finish SV Silver powder coat finish

*Canopy does not have an ADAPTER

DIMENSIONS

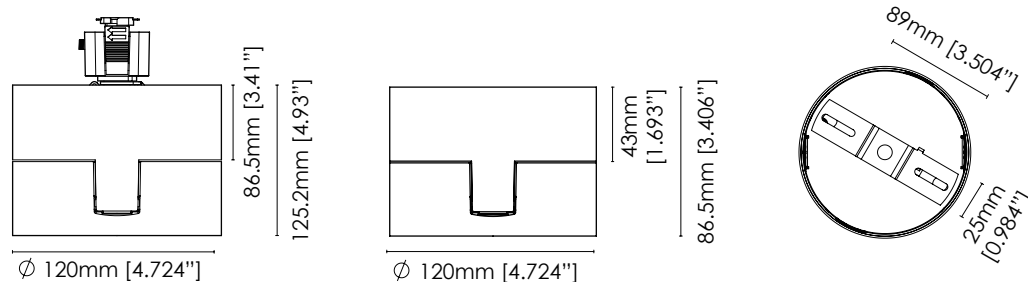



Equipped with a power supply, the TERRA wall wash series is capable of more than other track lights. TERRA Crescent has a programmable driver, smart control capabilities, and dimmer compatibility. The TERRA is made for the track system with various adapter options. TERRA can adapt to your pre-existing track system or with new ERALUX accessories. Like the TERRA Crescent Canopy, the fixture will offer a single asymmetric beam of light. The LED head can lock into place at various angles. You can choose a straight downlight or a perpendicular light to the wall. Terra series comes with tri-mode dimming (Triac, ELV, 0-10V), no flickering and capable of dimming down to 1%.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : Tri-mode dimming: Triac, ELV, 0-10V

Lumens per Watt : 54-58 LPW at 90 CRI


Distribution: Single Asymmetrical (Tilt 45°) 30°x35°

ORDERING GUIDE

Ordering code example: AE-TL-TR-UV-SAP27J1BK

FIXTURE FAMILY	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-TR ERALUX TERRA track light	-UV 120-277V	-SA 30 watts: 1,620 lumens at 3000K Single Asymmetrical (Tilt 45°) Beam Angle 30°x35°	P Premium 90 CRI	27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
				30 3000K CCT	G1 Global mounting system	WH White powder coat finish
				35 3500K CCT	H1 Halo mounting system	SV Silver powder coat finish
				40 4000K CCT	L1 Lightolier mounting system	

DIMENSIONS

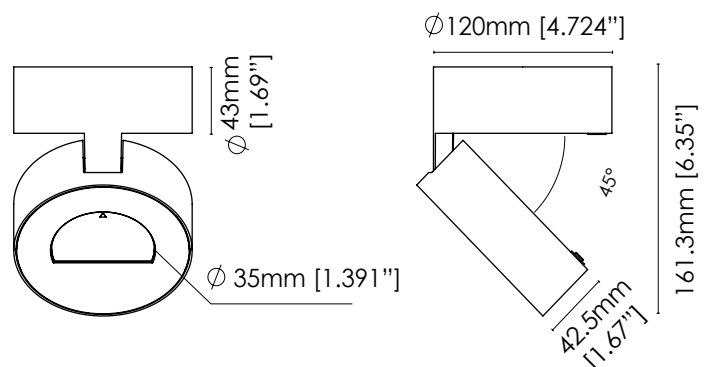



Equipped with a power supply, the TERRA series is capable of more than other canopy lights. TERRA Solar Canopy comes with a programmable driver, smart controls capabilities, and is dimmer compatible. The TERRA Solar Canopy is a single point surface adapter that can seamlessly fit onto any surface. Like the TERRA Solar, the fixture will offer a spot beam of light with various angle options. The LED head can lock into place at various angles, you can choose a straight downlight or a perpendicular light to the wall.

OPERATIONS & ELECTRICAL

Input Voltage : 120-277 Vac

Dimming : Triac dimming, 0-10V

Lumens per Watt :

54 LPW at 3000K

25 LPW at 3500K, 4000K

Distribution : 20°, 25°, 35°, 50°

TERRA SOLAR CANOPY


ORDERING GUIDE

Ordering code example:AE-TL-TR-30-UVFLP30J1BK

FIXTURE FAMILY	WATTAGE	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
AE-TL-TRC ERALUX TERRA CANOPY Series track light	-30 30 watts	-UV 120-277V input voltage	NF Narrow flood light distribution 20° CBCP 90CRI: 12810		27 2700K CCT	J1 Juno mounting system	BK Black powder coat finish
			FL Flood light distribution 25° CBCP 90CRI: 9920	P Premium 90 CRI	30 3000K CCT	G1 Global mounting system	WH White powder coat finish
			WF Wide flood light distribution 35° CBCP 90CRI: 4520		35 3500K CCT	H1 Halo mounting system	SV Silver powder coat finish
			VF Very wide flood light distribution 50° CBCP 90CRI: 3035		40 4000K CCT	L1 Lightolier mounting system	

*Canopy does not have an ADAPTER

DIMENSIONS

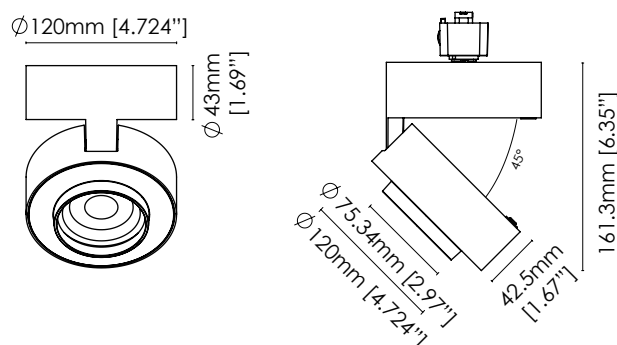



The Astro Line track head is an excellent option for wall wash projects due to its unique beam angle. Our track head is characterized by its linear shape that comes in either 2 or 4FT lengths. It has the CCT SELECTABLE feature making it suitable for any project. Finally, it comes in different finishes White and Black.

OPERATIONS & ELECTRICAL

Input Voltage : 120 Vac

Dimming : Triac dimming

Lumens per Watt : 85~100 LPW at 90 CRI

ORDERING GUIDE


Ordering code example: AE-TL-ASA12DAP30/35/40J1BK

FIXTURE FAMILY	LENGTH	VOLTAGE	DISTRIBUTION	CRI	CCT	ADAPTER	FINISH
----------------	--------	---------	--------------	-----	-----	---------	--------

ASTRO LINE

AE-TL-AS LINE track light	A Length: 2 FT Power : 20W 1990lm@3000k	12 120V	DA Double Asymmetrical	P Premium 90 CRI	30/35/40 CCT Switchable 3000k/3500 /4000k	J1 Juno mounting system	BK Black powder coat finish
	B Length: 4 FT Power : 38W 3780lm@3000k		SA Single Asymmetrical				WH White powder coat finish
			DF Diffuser				

DIMENSIONS

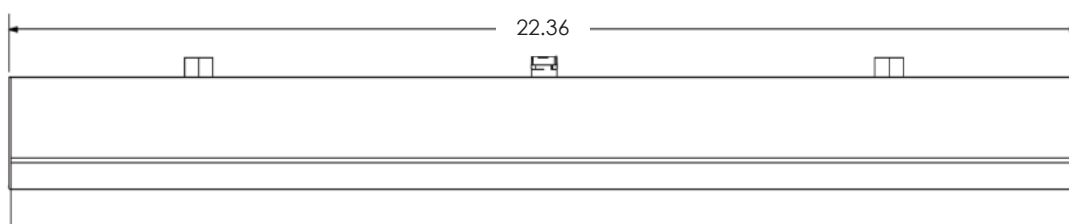





T1



T2

Track 1 (T1) is compatible with Juno single circuit adapters and Track 2 (T2) is compatible with Juno two circuit adapters. The track/power distribution system is suitable for retail, commercial and residential use. Ships with one T0009 and (end cap) installed. Extruded aluminum "I" beam. Thermoplastic insulator. Two #12 AWG solid copper conductors.

OPERATIONS & ELECTRICAL

120V 50/60Hz 20A max
cULus Listed

ORDERING GUIDE

Add SUFFIX -XXX to the part number for color indication Ordering code example: T1-2-BK


	PART NO.	LENGTH	FINISH
	T1-2/T2-2	2' [512mm, 20.16"]	
T1	T1-4/T2-4	4' [1122mm, 44.17"]	BK- black
T2	T1-6/T2-6	6' [1732mm, 68.19"]	WHT- white
	T1-8/T2-8	8' [2341mm, 92.17"]	SV- Silver

TRACK SYSTEM T1 T2

T1 Connectors



Mini I Connector
T10001




T Connector
T10002



L Connector
T10003



X Connector
T10004



Floating Canopy
T10005



Conduit End Feed
T10006



Flexible Connector
T10007



End fit Kit with cover
T10008




End Cap
T100009



Pendant Luminaire
Adapter, chain
T10010



Pendant Luminaire
Adapter, cord
T10011




T-Bar Connector
T10012

T1 Connectors



T-Bar End Feed
T10013



Mounting Clip
T10014



Top Access End Feed
T10015



Line Voltage
Mono-Point Adapter
T10016



Cover Plate
T10020



Single Circuit End
Feed
T10021



Single Circuit
In-Line Feed
T10023



Suspension canopy
T10027




48 inch STEM
TS48-WHT, TS48-BLK



36 inch STEM
TS36-WHT, TS36-BLK




24 inch STEM
TS24-WHT, TS24-BLK




12 inch STEM
TS12-WHT, TS12-BLK

T2 Connectors



Mini I Connector
T20001



T Connector
T20002
T20002R (Reverse)




L Connector
T20003




X Connector
T20004



Floating Canopy
T20005




Conduit End Feed
T20006
T20006R(Reverse)




Conduit End Feed
T20007



END FEED KIT +
COVER T20008
T20008R(Reverse)



End Cap
T20009



T-Bar
Connector
T20012



T-Bar End Feed
T20013



Top Access End Feed
T20015
T20015R(Reverse)



Two Circuit End
Feed
T20021



Two Circuit In-Line
Feed + 1' Track
T20023

GIMBALS THAT FIT EVERY SETTING

The classic essential that perfectly fits into every budget point.

Ideal for indoor settings, such as in retail stores, office areas, receptions, corridors, and residential spaces such as kitchen and dining rooms and living spaces. ERALUX's gimbals are available with a range of mounting types, adapters, and finishes. This selection makes sure that ERALUX provides the perfect gimbal for every setting no matter the requirements. Furthermore, the use of these modern LED lights contributes to a cleaner environment with higher energy savings.



OLP00



FIXTURE FAMILY	Mounting type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	OLP00 Lexan lamp holder	J1	BK WH SV	
		H1		
		GI		
		L1		

OOP00



FIXTURE FAMILY	Mounting type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	OOP00 Universal Lamp holder	J1	BK WH SV	
		H1		
		GI		
		L1		

AJP00



FIXTURE FAMILY	Mounting type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	AJP00 Universal lamp holder	J1	BK	
			WH	

GBP38



FIXTURE FAMILY	Mounting type	Lamp type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	GBP	38 PAR38		J1	
				H1	
				GI	
				L1	

GFP30



FIXTURE FAMILY	Mounting type	Lamp type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	GFP	30 PAR30		J1	
				H1	
				GI	
				L1	

GFP38



FIXTURE FAMILY	Mounting type	Lamp type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	GFP	38 PAR38 short neck lamp	J1 H1 G1 L1	BK WH SV	

FCP20



FIXTURE FAMILY	Mounting type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	FCP20 Flat cylinder	J1 H1 G1 L1	BK WH	

FCP30



FIXTURE FAMILY	Mounting type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	FCP30 Flat cylinder	J1 H1 G1 L1	BK WH	

CLP30



FIXTURE FAMILY	Mounting type	ADAPTER	FINISH	DIMENSION
AEH- ERALUX Line voltage track light	CLP30 Par30 lamp holder	J1 H1 G1 L1	BK WH	

Remark

1. 120 Vac only
2. G1: Global mounting system
3. H1: Halo mounting system
4. J1: Juno mounting system
5. L1: Lightolier mounting system
6. BK: Black paint finish
7. WH: White paint finish
8. SV: Silver paint finish

THE RELIABLE BACKUP PLAN FOR LIGHTING.

Making way for a safer environment for all.

Emergency lights using modern LED lights. Variety of metal or thermoplastic housing that can be mounted on the wall, the ceiling or by side installation. Many of ERALUX's durable emergency lights allows for people to customize their product by easily interchanging pictograms on site at any time. Increases the safety of your workspace by providing an exit light, or emergency back up when things go wrong.





EXITA SERIES

BY-F2230CA





Input Voltage : 120-347 Vac
CCT : 5700-7200K
Power consumption : 4.5W
Emergency Duration: 120 min



BY-F2231CA





Input Voltage : 120-347 Vac
CCT : 5700-7200K
Power consumption : 4.5W
Emergency Duration: 120 min



B2408U





Input Voltage : 120-347 Vac
CCT : 6500K
Power consumption : 2W
Emergency Duration: 90 min

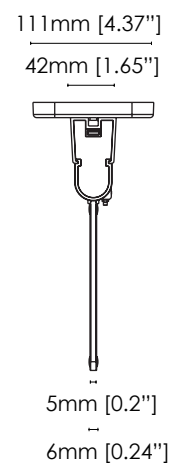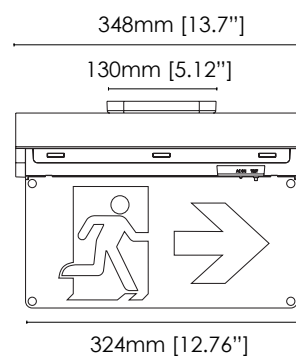

BY-F5024CA




Input Voltage : 120-347 Vac
CCT : 6500K
Power consumption : 2W
Emergency Duration: ≥1.5 Hours

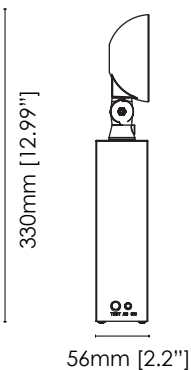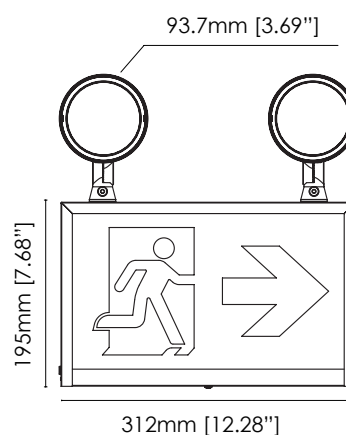


BY-F5025CA



Input Voltage : 120-347 Vac
CCT : 6500K
Power consumption : 2W
Emergency Duration: ≥ 1.5 Hours



312mm [12.28"]




195mm [7.68"]

54mm [2.13"]

EXITA-Z1101U



Input Voltage : DC 3.6-24 Vac
CCT : 6000 - 6500K
Power consumption :
3.6V/H:1.8-2.2W
12V/H:3.6-4.2W
24V/H:3.6-4.4W




127mm [5"]

125mm [4.92"]

EXITA-Z1102U



Input Voltage : DC 3.6-24 Vac
CCT : 6000 - 6500K
Power consumption :
3.6V/H:1.8-2.2W
12V/H:3.6-4.2W
24V/H:3.6-4.4W



185mm [7.28"]


129mm [5.08"]

125mm [4.92"]

EXITA-Z1102U-N




Input Voltage :
AC120V/277V/347 Vac
CCT : 6000 - 6500K
Power consumption :
3.6V/H:0.95-1.15W
12V/H:1.75-2.1W
24V/H:1.95-2.4W

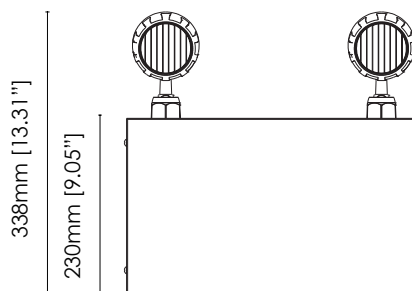

338mm [13.31"]

230mm [9.05"]

355mm [13.98"]

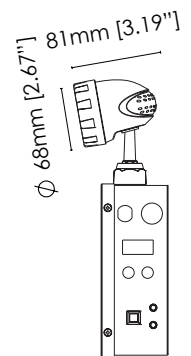

81mm [3.19"]

68mm [2.67"]


88mm [3.46"]

EXITA SERIES

CR-7107




Input Voltage : 120-347 Vac
Power consumption : 5W
Emergency Duration: 120 min

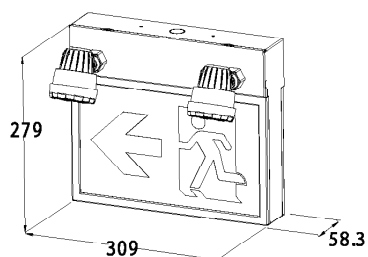

CR-7037




Input Voltage : 120-277 Vac
Power consumption : 1.2W
Emergency Duration: 90 min

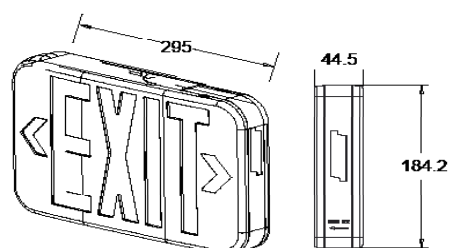

CR-7105R




Input Voltage : 120-277 Vac
Power consumption : 1.2W
Emergency Duration: 90 min

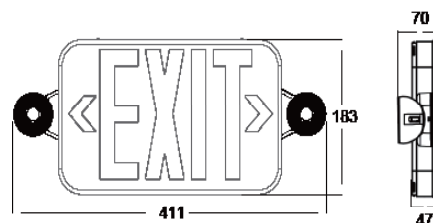

CR-7082RX




Input Voltage : 120-277 Vac
Power consumption : 1.2W
Emergency Duration: 90 min

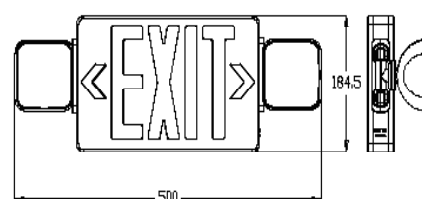

CR-7108R




Input Voltage : 120-347 Vac
Power consumption : 1.2W
Emergency Duration: 120 mins

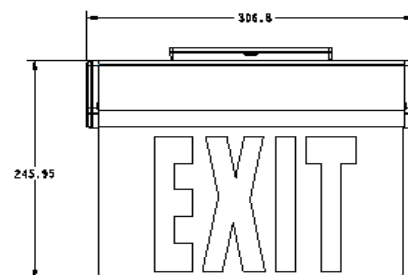

CR-7110




Input Voltage : 120-347 Vac
Power consumption : 1.2W
Emergency Duration: 90 mins
Colour can be green or red

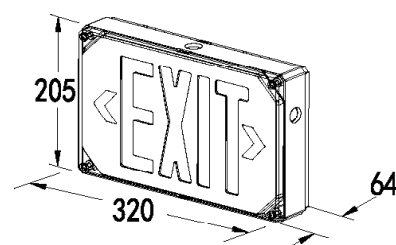

CR-7111C




Input Voltage : 120-277 Vac
Power consumption : 2W
Emergency Duration: 90 mins
Colour can be green or red

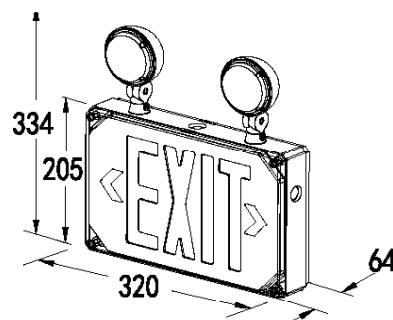

CR-7111S





Input Voltage : 120-277 Vac
Power consumption : 2W
Emergency Duration: 90 mins
Colour can be green or red

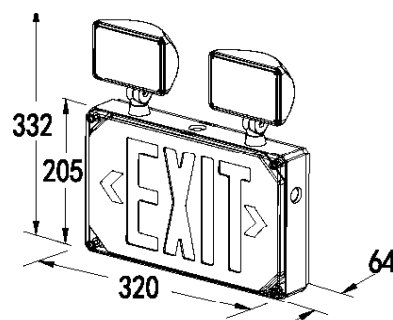

NOTE

NOTE

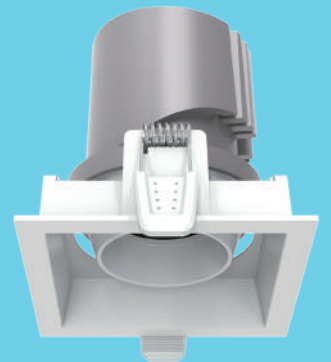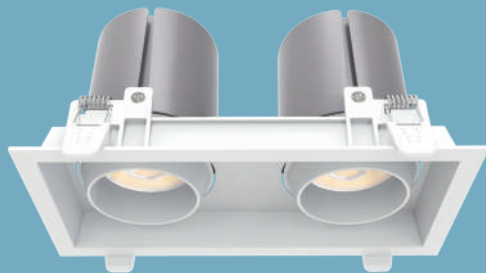

eralux[®]
Experience The Difference



www.eralux.com

