

THALASSA ET6020

OUTDOOR PRODUCTS

Sconce

The Thalassa outdoor surface mounted cylindrical LED fixture was created with a sleek design deliberately, so it could blend in with many different outdoor building styles. The Thalassa also has an impressive efficacy of 70 LPW providing performance as well as elegance in the install environment. Finally, this product is a complete aluminum die cast offering an unparalleled sense of finesse, fixture strength and quality.









DATE							
PROJECT NAME							
TYPE							
QTY							
ORDERING CODE	ET6020	-	-	-	-80	-	-DMG

OPERATING & ELECTRICAL					
INPUT VOLTAGE	120-277Vac				
POWER FACTOR	0.9				
DIMMING	0-10V external dimming down to 10% (with DMG option)				
TOTAL HARMONIC DISTORTION (THD)	<20%				

AMBIENT TEMPERATURE RANGE	-25 to 50°C
Protection	IP65

APPLICATION CONDITION

	IN ONNAITOE
LUMENS PER WATT	~70 LPW at 80CRI
POWER CONSUMPTION	24W
BEAM ANGLE	24W:10, 25, 38, 45, 60° 40W: 8, 18, 36, 62°

MOUNTING	Surface Mount

COMPATIBLE MOUNTING

WARRANTY SYSTEM WARRANTY - 5 YEARS Eralux will warrant defective drivers, LEDs and boards for

5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

LUMEN MAINTENANCE - L85 at 50,000 hours

Rated for 85% initial lumen output at 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES). (L85 at 50,000 hours)

MECH	ANICAL & HOUSING
HOUSING	Aluminum die cast
LENS	Highly durable, shatterproof tempered glass lens ensures high efficiency light output for a clean, evenly illuminated surface with minimal glare.
FINISH	ERALUX white, black, gray (RAL9006) powder coat finish
POWER SUPPLY	Factory wired electronic LED driver
LED BOARD	СОВ

OUTDOOR PRODUCTS Sconce

DATE							
PROJECT NAME							
TYPE							
QTY							
ORDERING CODE	ET6020	-	-	-	-80	-	-DMG

ORDERING GUIDE

ORDERING G	DRDERING GUIDE EXAMPLE: ET6020-C24-3-10-80-W-DMG								
FIXTURE FAMILY	POWER	сст	BEAM ANGLE	CRI	FINISH	CONTROLS			
ET6020	-C24	-	-	-80	-	-DMG			
ET6020 ERALUX Thalassa ET6020 outdoor surface mounted sconce fixture	- C24 24 watts: 1680 lumens	-3 3000K CCT	-10 10° beam angle	- 80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%			
			-25 25° beam						
		-4 4000K CCT	angle		-W White				
			-38 38° beam angle		powder coat finish				
			-45						
		-6 6000K CCT	45° beam angle		-S Silver (RAL9006)				
	-60 60° beam angle	60° beam		powder coat finish					

ORDERING GUIDE

EXAMPLE: ET6020-C40-3-08-80-B-DMG

FIXTURE FAMILY	POWER	ССТ	BEAM ANGLE	CRI	FINISH	CONTROLS
ET6020	-C40	-	-	-80	-	-DMG
ET6020 ERALUX Thalassa ET6020 outdoor surface mounted sconce fixture	-C40 40 watts: 2800 lumens	-3 3000K CCT	-08 8° beam angle	- 80 80 CRI	-B Black powder coat finish	-DMG 0-10V external dimming down to 10%
			-18			
		-4 4000K CCT	18° beam angle		-W White powder coat finish	
			-36 36° beam angle		00011111011	
		-5			-S	
		5000K CCT	- 62 62° beam angle		Silver (RAL9006) powder coat finish	


OUTDOOR PRODUCTS


Sconce

DATE							
PROJECT NAME							
TYPE							
QTY							
ORDERING CODE	ET6020	-	-	-	-80	-	-DMG

DIMENSIONS

EXAMPLE: AE-OD-ET6020



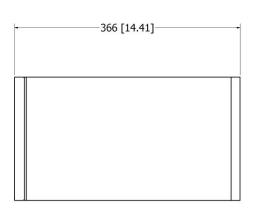


LUMEN ESTIMATE

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS							
	CCT	2700K	3000K	3500K	4000K		
	NORMAL (80CRI)	0.91	1	1.02	1.03		

PHOTOMETRIC DATA

ET6020-C24-3-15-80-X-XXX

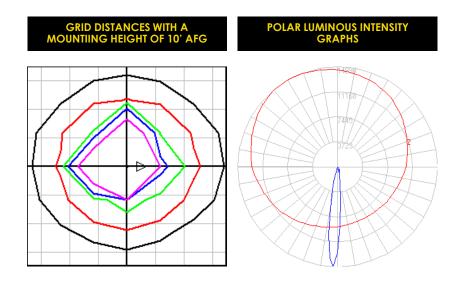

OUTDOOR PRODUCTS


Sconce

DATE							
PROJECT NAME							
TYPE							
QTY							
ORDERING CODE	ET6020	-	-	-	-80	-	-DMG

ACCESSORIES


Ordered separately, field installed

EMERGENCY LED DRIVER (BLD-CM20N-480800-8W)

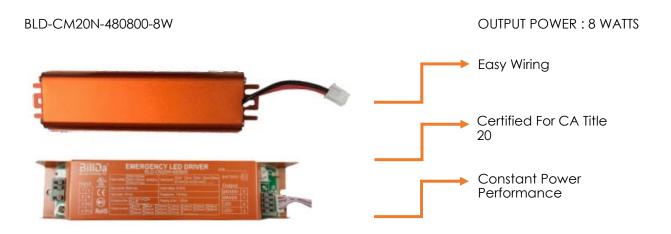

BLD-CM20N-480800-8W LED Emergency Driver is UL listed for field and factory installation that allows the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the emergency driver switches to emergency mode and operates the fixture for 90 minutes. The unit contains a battery, charge, and converter circuit in a single enclosure. This module will operate a LED array load at 8W with constant power at a rated output voltage of 25-48 VDC. The constant power design of BLD-CM20N-480800-8W maintains the output wattage to the LED array, providing consistent illumination for the entire emergency runtime. Its slim shape is ideal for use indoor or outdoor LED lighting fixtures, such as linear lights, wall packs or sconces, etc.

DIMENSIONS (inches and mm)

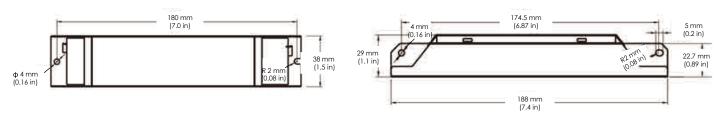

OUTDOOR PRODUCTS
Sconce

DATE							
PROJECT NAME							
TYPE							
QTY							
ORDERING CODE	ET6020	-	-	-	-80	-	-DMG

OVERVIEW



PREMIUM MATERIALS

Constructed from aluminum diecast enhancing thermal heat dissipation while providing excellent figure strength.

MULTIPLE BEAM ANGLES

Customize your fixture with a unique set of beam angles in the uplight or downlight orientation with the option to having a 20-degree tilt towards the wall.

MULTIPLE FINISH OPTIONS

Select from black, white, or silver powder coat anti-cracking finishes to accent your project space.

CRI

80 CRI provides greater rendering allowing for a more natural light look.





