# MOONRAKER EVOLVE

LINEAR FIXTURES

Led Linear Wraparound Fixture

The MOONRAKER EVOLVE series is the economical replacement for linear fixtures. They are available in 4 feet lengths and are designed to meet installation needs for surface mounted requirements. Furthermore, this luminaire offers a performance above 115 LPW at a variety of power and CCT options while showing great versatility in operating voltage from 120-347V.











DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-MRE-04-3248N

OPERATING & ELECTRICAL		
INPUT VOLTAGE	120-347V	
POWER FACTOR	0.9	
DIMMING	0-10V	
TOTAL HARMONIC DISTORTION (THD)	<20%	

PERFORMANCE			
LUMENS PER WATT 108~115 LPW at 80CRI			
POWER 40			
<b>DISTRIBUTION</b> Lambertian			

MECHANICAL & HOUSING		
HOUSING	22-gauge painted sheet metal	
LENS	PMMA lens	
FINISH	White	
POWER SUPPLY	Factory wired electronic LED driver	
LED BOARD	LED Array	

### **APPLICATION CONDITION**

AMBIENT TEMPERTURE	-20°C to 45°C
RANGE	-20 C 10 43 C

### **COMPATIBLE MOUNTING**

Surface

MOUNTING
Suspension
(optional accessories)

#### **WARRANTY**

#### **SYSTEM WARRANTY - 5 YEARS**

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

#### LUMEN MAINTENANCE - L85 at 50,000 hours

Rated for 85% initial lumen output at more than 50,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

"Not all product variations listed on this page are DLC qualified with the LUNA designation. Visit https://qpl.designlights.org/ to confirm qualification."

# eralux® MOONRAKER EVOLVE

LINEAR FIXTURES
Led Linear Wraparound Fixture

DATE		
PROJECT NAME		
TYPE		
QTY		
ORDERING CODE	AE-SF-MRE-04-3248N	

**EXAMPLE: AE-SF-MRE-04-3248N** 


#### **ORDERING GUIDE**

FIXTURE FAMILY	LENGTH	POWER	сст	CONTROLS
AE-SF-MRE-	04-	3248	N	
AE-SF-MRE  Moonraker Evolve linear wraparound fixture 120-347Vac	04 4FT length	3248 Switchable Power 48 watts: 5,520 lumens 40 watts: 4,600 lumens 32 watts: 3,680 lumens	N 80 CRI 3500K, 4000K, 5000K CCT Switchable	[BLANK] 0-10V MS Motion Sensor

CAUTION: If there are multiple fixtures connected to the same 0-10V dimming line, a 0-10V controller must be considered to enable consistent dimming across the fixtures. Failure to do so will lead to inconsistent dimming and behaviors in the fixtures. Single switch is not recommended for controlling multiple fixtures simultaneously.

#### **PRODUCT DIMENSIONS**

#### AE-SF-MRE-04-3248N

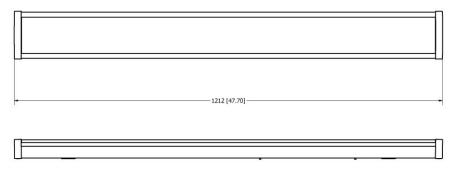



### TECHNICAL REQUIREMENTS - DLC MODEL

TECHNICAL REQUIREMENTS VERSION	PRODUCT ID	MODEL NUMBER
5.1	PJA8UYAX	AE-SF-MRE-04-3248N

#### **LUMEN ESTIMATE**

Lumen output varies based on CCT and CRI. An estimate of lumen output of the various CCT/CRI combinations, use correction factors as per table below:

LUMEN ESTIMATE ADJUSTMENT FACTORS			
CCT	3500K	4000K	5000K
NORMAL (80CRI)	0.97	1	1.03

# eralux® MOONRAKER EVOLVE


LINEAR FIXTURES
Led Linear Wraparound Fixture

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-MRE-04-3248N

#### **ACCESSORIES**


Ordered separately, field installed

## **EMERGENCY LED DRIVER (BLD-YTXXD-XXX)**

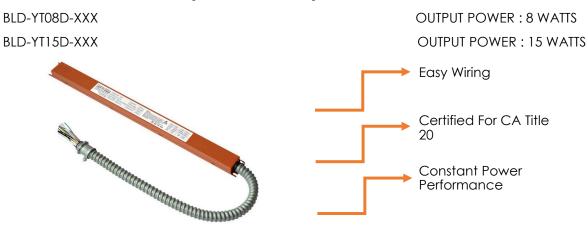

BLD-YTXXD-XXX LED Emergency Driver is UL listed for field and factory installation that allows the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the emergency driver switches to emergency mode and operates the fixture for 90 minutes. This module will operate a LED array load at 8W or 15W with constant power at a rated output voltage of 30-60 VDC. The constant power design of BLD-YTXXD-XXX maintains the output wattage to the LED array, providing consistent illumination for the entire emergency runtime. Its slim shape is ideal for use in linear LED lighting fixtures.

# **DIMENSIONS** (inches and mm)

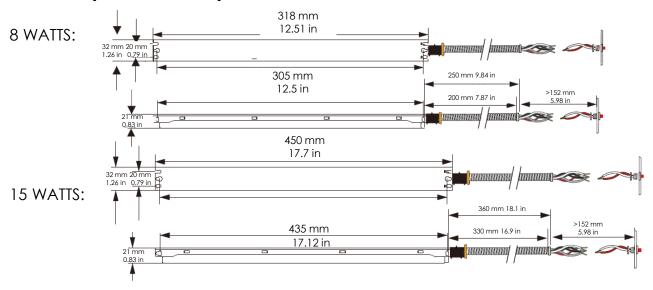

# eralux° MOONRAKER EVOLVE


LINEAR FIXTURES
Led Linear Wraparound Fixture

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-MRE-04-3248N

#### PHOTOMETRIC DATA


AE-SF-MRE-04-3248N (3500K) 40 WATTS 3500K CCT

ZONAL LUMEN SUMMARY			
ZONE	LUMENS	% OF FIXTURE	
0-20°	639.06	14.40	
0-30°	1331.96	30.00	
0-40°	2128.77	47.90	
0-60°	3569.99	80.40	
0-80°	4320.07	97.20	
0-90°	4406.82	99.20	



AE-SF-MRE-04-3248N (5000K) 40 WATTS 5000K CCT

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF FIXTURE
0-20°	643.76	14.40
0-30°	1341.51	30.00
0-40°	2143.68	47.90
0-60°	3593.33	80.40
0-80°	4348.21	97.30
0-90°	4436.45	99.20



### **DIMMER COMPATIBILITY LIST**

0-10V Dimmer
LUTRON NTSTV-DV
LUTRON NFTV
LUTRON DVTV
LUTRON DVSTV
LEVITON IP710
LEVITON DS710
LEGRAND RH4FBL3PW

# eralux® MOONRAKER EVOLVE

LINEAR FIXTURES
Led Linear Wraparound Fixture

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	AE-SF-MRE-04-3248N

# **OVERVIEW**

