

# PAGO

## OUTDOOR LED LIGHT

### High Output Wedge Cut-Off Wall Pack | Power Switchable

The Pago series comes in a smooth matte design offering a high power and lumens to any dark outdoor spaces. Its IP65 offers great protection to outdoor environments making it suitable to be wall mounted above garages, warehouse facades and more.


Applications: Building facade | Pathway | Entrance

eralux®

	DATE	QTY	ACC. QTY	TYPE
PROJECT				
PN				
ACCESSORY PN				
NOTES				

DYNAMIC MENU	
Order Information	<a href="#">Page 2</a>
Dimensions	<a href="#">Page 2</a>
Accessories	<a href="#">Page 3</a>
Photometric Data	<a href="#">Page 5</a>

[Install Instruction link](#)

SPECIFICATIONS	
Input Voltage	120-347V
Power Factor	>0.9
Total Harmonic Distortion	<20%
Dimming	0-10V
CRI	80 CRI
CCT	<div style="display: flex; gap: 10px;"> <div style="border: 1px solid black; border-radius: 50%; padding: 2px 5px;">40K</div> <div style="border: 1px solid black; border-radius: 50%; padding: 2px 5px;">50K</div> </div>
Efficacy	~150 lm/W
Power (W)	90/120/150
Ambient Temperature Range	-40°C to 45°C
Mounting Options	Wall Mount
Fixture Finish	Black   Bronze 
Controls	Integrated Photocell Emergency Battery Back up Motion Sensor
Protection	IP65 6kV Surge Protector
Distribution	Type 3 Type 4



### PRODUCT FEATURES



### PRODUCT CERTIFICATIONS



### SYSTEM WARRANTY – 5 YEARS

Eralux will warrant defective drivers, LEDs and boards for 5 years from the date of purchase. This warranty is valid only if the fixture is installed and used as per installation guides and specifications. If a defect is present, Eralux will send drivers and boards at no fee with a thorough replacement instructions along with instructions on the return of the defective parts back to Eralux.

### LUMEN MAINTENANCE – L70 at 100,000 hours

Rated for 70% initial lumen output at 100,000 hours of operation, operated at 25°C ambient temperature; per guidelines published by the Illuminating Engineering Society (IES).

## OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable



### ORDERING GUIDE

<b>WP-PG</b>	<b>-150W</b>		<b>-CA</b>			
<b>WP-PG</b> PAGO Outdoor wedge High Output Wall Pack	<b>-150W</b> 90/120/150W 13500/18000/22500lm	<b>-40K</b> 4000K <b>-50K</b> 5000K	<b>-CA</b> 120-347 V	<b>-[Blank]</b> 0-10V Dimming <b>-MS</b> Motion Sensor	<b>-T3</b> T3 <b>-T4</b> T4	<b>-BZ</b> Bronze <b>-BK</b> Black

<b>Fixture Family</b>	<b>Power</b>	<b>CCT</b>	<b>Voltage</b>	<b>Controls</b>	<b>Finish</b>	<b>Lens</b>
-----------------------	--------------	------------	----------------	-----------------	---------------	-------------

### CONTROLS

<b>AE-WP-ET</b>	<b>-20W-EM-KIT</b>
-----------------	--------------------

**AE-WP-ET**  
ERALUX ETNA  
Wall Pack

**-20W-EM-KIT**  
20W Emergency Battery  
Backup

<b>Fixture Family</b>	<b>EMBB</b>
-----------------------	-------------

### CONTROLS

<b>WP-PG-PC-KIT</b>
---------------------


**WP-PG-PC-KIT**  
Wall Pack Photocell Kit

<b>Photocell</b>
------------------


### DIMENSIONS

**WP-PG-150W-XXX-CA-XX**

**Front View**

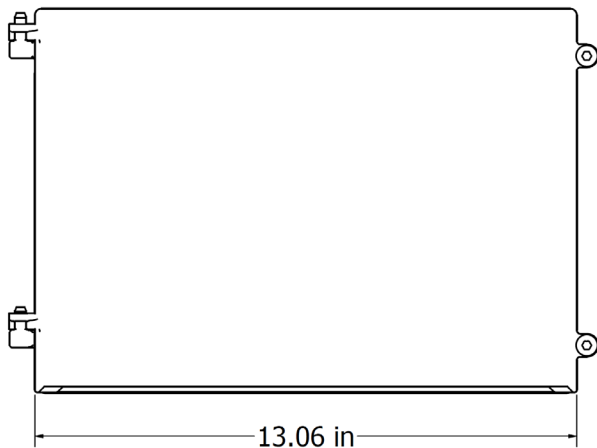

**Side View**

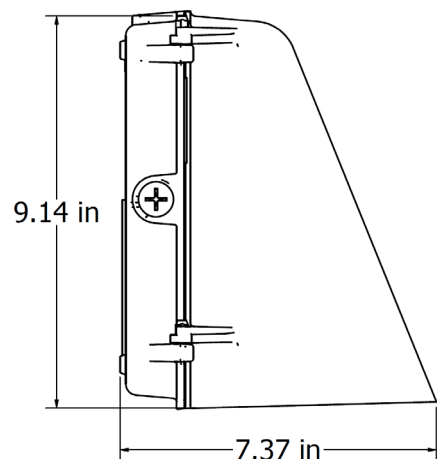

## OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable


### ACCESSORIES

#### MOTION SENSOR


CODE	DESCRIPTION	PICTURE
AE-IL-SB2-CA-MOTIONSENSOR	Plug in low-voltage microwave motion sensor with white arm	
AE-IL-SB2-CA-REMOTE-CTRL	Remote control for the motion sensor	

#### Factory mode

Factory Default Setting	
Sensitivity	100%
Hold on time	5 min
Daylight Sensor	ON
Dimming level	30%
Dimming time	30 min

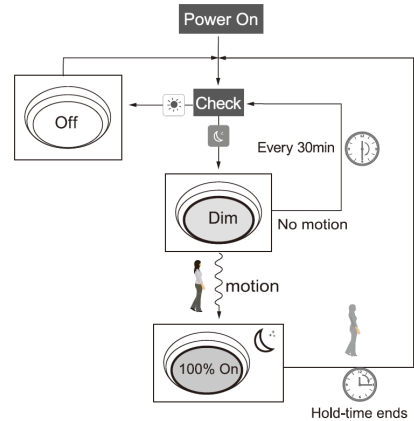

#### Area Coverage

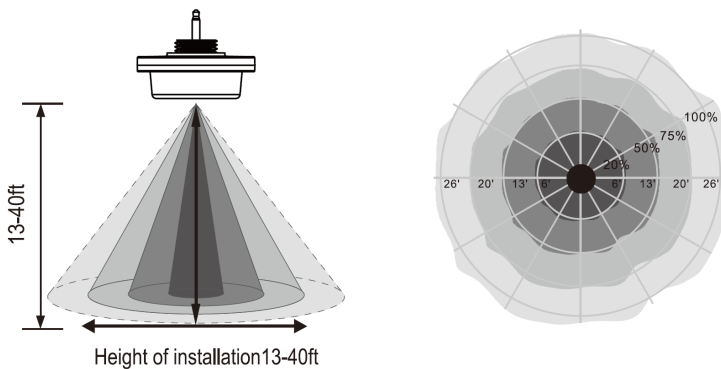



## OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable

### ACCESSORIES

#### EMERGENCY LED DRIVER

### AE-WP-ET-20W-EM-KIT

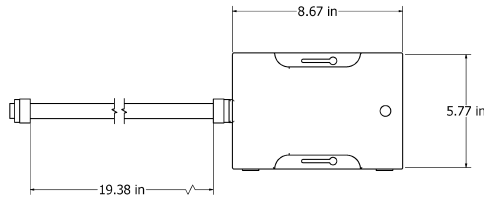

SPECIFICATION	
<b>Input Voltage</b>	100-347Vac
<b>Power Frequency</b>	50/60HZ
<b>Output Voltage</b>	170V DC
<b>Ambient Temperature</b>	0°C to 50°C / 30°F to 122°F
<b>Output Power</b>	20W
<b>Installation</b>	Remote with exterior junction Box

#### PHOTOCELL KIT


CODE	DESCRIPTION	PICTURE
WP-PG-PC-KIT	Plug in photocell with white arm	

## OUTDOOR LED LIGHT


High Output Wedge Cut-Off Wall Pack | Power Switchable

### PHOTOMETRIC DATA

#### T3 Lens

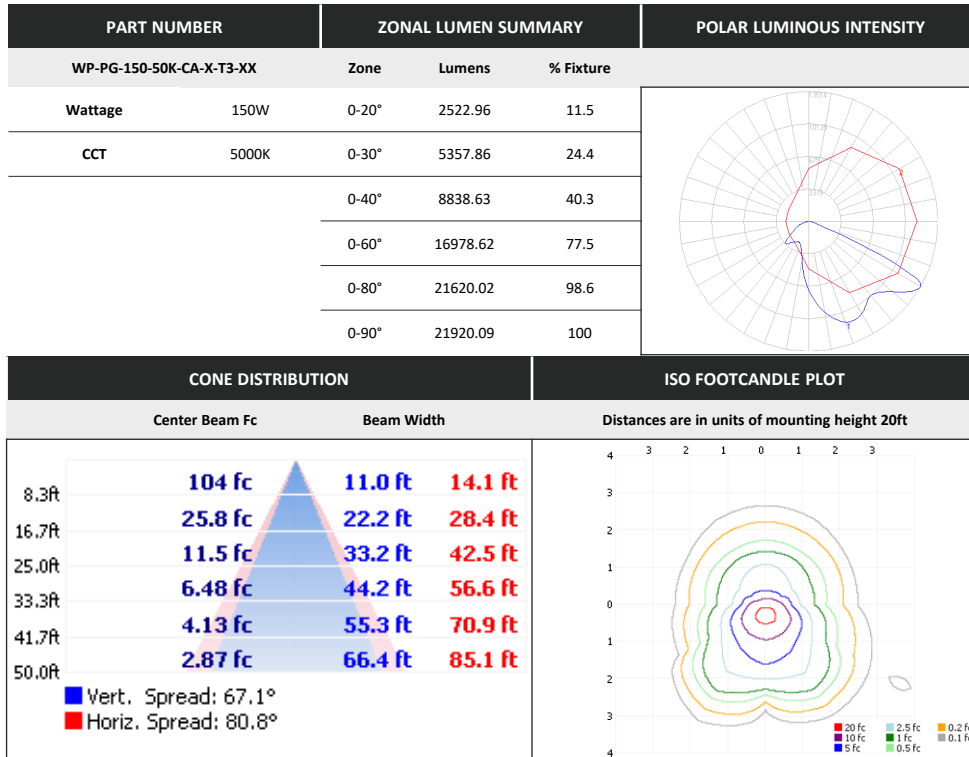

#### T4 Lens

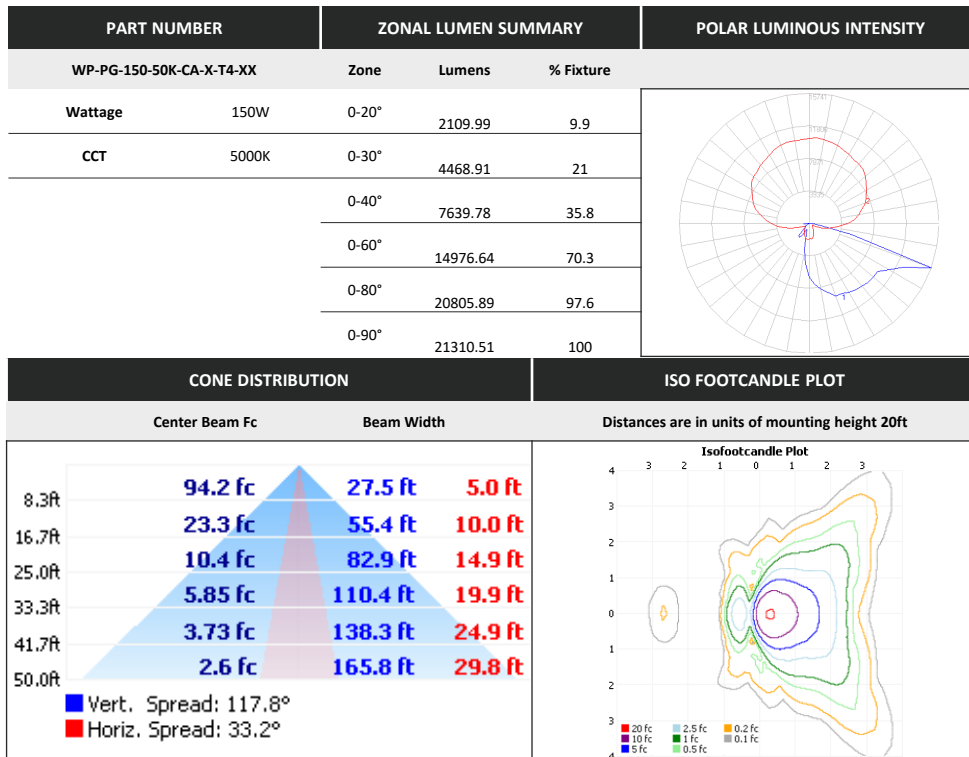

## OUTDOOR LED LIGHT

High Output Wedge Cut-Off Wall Pack | Power Switchable

### OVERVIEW



#### Innovative Design

- Aluminum die cast housing and fins for better heat dissipation
- High and efficient output



#### Multiple Options

- 40K and 50K CCT options
- Power Switchable
- Black & bronze finishes.



#### Protection

- Protected against dust ingress.
- Protected against water jets
- 6kV Surge Protector



#### Accessories

- photocell
- Integrated Emergency Battery Back up
- Plug in Motion sensor



Emergency backup battery



Photocell



Motion Sensor



#### Mounting Available

- Wall mount



#### Tests And Certifications

