

EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7107



eralux®



The CR-7107 has long life high intensity LEDs, it is encased in a fire-resistant Steel and thermoplastic ABS housing, while performing in damp locations

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7107

OPERATING & ELECTRICAL

INPUT VOLTAGE 120/347 Vac

INPUT RATING 5W, 100mA

PERFORMANCE

POWER CONSUMPTION 5 W

RUN TIME ON BATTERY 120 mins

LAMPS 2x2W LED

REMOTE CAPABILITY 32W
30 mins

MECHANICAL & HOUSING

HOUSING Steel
Thermoplastic ABS head
UL-94-V0 flame-retardant
fire-resistant

FINISH Powder Coated White

POWER SUPPLY Factory wired electronic LED driver

APPLICATION CONDITION

AMBIENT TEMPERATURE RANGE 0 °C to 40°C

COMPATIBLE MOUNTING

MOUNTING Wall
End
Ceiling

WARRANTY

SYSTEM WARRANTY 2 years

RECOMMENDED BATTERY REPLACEMENT 2 years

APPROVALS

Certification **UL-924**
NFPA 101 Life Safety Code
NEC
OSHA
CSA C22 No. 141-15 performance certified


EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7107

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7107

PRODUCT DIMENSIONS

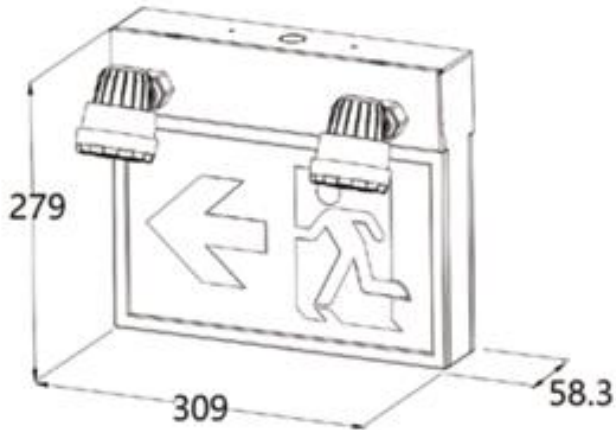

ORDERING CODE

FIXTURE FAMILY
CR-7107
CR-7107 ERALUX EMERGENCY EXIT SIGN POWER: 4W

EXITA SERIES

EMERGENCY LIGHTING

EXITA CR-7107

DATE	
PROJECT NAME	
TYPE	
QTY	
ORDERING CODE	CR-7107

OVERVIEW

MULTIPLE MOUNTING

It comes with two different mounting types. It can be installed on wall, end or even on ceiling. Comes with three different image options



CONFIGURATIONS

Universal field-selectable single/double-face, with fully illuminated 6" characters using long-life, high intensity LEDs.

LAMP HEAD POWER

Each head contains 2PCS 2W to provide total 4W.



BATTERY PERFORMANCE

The battery is made of 6V Sealed Lead-acid material, and it is maintenance free. Its charging time is 24 hours, and it lasts for 120 minutes. Also; Remotely it provides excess power around 32W for 30 minutes during power outage.

VALUE ENGINEERED DESIGN

Steel housing and thermoplastic ABS head to provide safety against flame and fire.

